

AS 9100 CERTIFIED

RF & Microwave cable assemblies

C291

RADIAL 
The next conneXion

B

	Pages
Introduction	B-4
Specify the right cable for your application	B-5
Finder guide cables vs insertion loss	B-6 to B-7
Flexible cables	
0.8/50 S cable (132390 type)	B-8
1/50 S cable (50VMTX type)	B-8
1/75 S cable (75VMTX type)	B-9
2/50 S cable (RG178-KX21A-RG178 non mag)	B-9 to B-10
2/50 D cable (124416 type)	B-10
2/75 S cable (296775 type)	B-11
2.6/50 S cable (RG174-KX3B-RG316-KX22A)	B-11 to B-12
2.6/50 D cable (RD316)	B-13
2.6/75 S cable (RG179)	B-15
4.6/75 D cable (HD 0.6/2.8-mini RG59 type)	B-15
5/50 S cable (RG58-KX15)	B-16
5/50 D cable (RG142-RG223-RG400-KX23)	B-16 and B-18 to B-19
6/75 S cable (RG59-KX6A)	B-21
6/75 D cable (HD 0.8/3.7-RG59 type)	B-22
7/75 D cable (HD 1.0/4.8-RG6 type)	B-22
10/50 S cable (RG213-KX4)	B-23
10/50 D cable (RG393)	B-23
11/50 D cable (RG214-KX13)	B-25
11/75 D cable (RG216)	B-26
ECO low loss flexible cables	
2.6/50 S cable (ECO316-ECO316X)	B-12 to B-13
2.6/50 D cable (ECO316D-ECO316DX)	B-14
5/50 D cable (ECO142-ECO142X-Power142)	B-17 to B-18
6/50 D cable (ECO230)	B-20
10/50 D cable (ECO393-ECO393X)	B-24
LMR low loss flexible cables	
5/50 D cable (LMR200)	B-20
10.3/50 D cable (LMR400)	B-25
15.2/50 D cable (LMR600)	B-26
SHF Ultra low loss cables	B-37 to B-38
Corrugated cables	
Cable 1/4" spiral (HCF 1/4"-50 AlCu)	B-27
Cable 3/8" spiral (HCF 3/8" CuH-50 AlCu)	B-27
Cable 1/2" spiral (HCF 1/2" CuH-50 AlCu)	B-28
Semi-rigid and hand-formable cables	
.047" cable (SR copper-SR tinned copper)	B-28 to B-29
.085" cable (Handformable unjacketed-SR RG405/KS1-SR tinned copper-SR non magnetic-SR aluminium)	B-29 to B-31
.141" cable (Handformable unjacketed-Handformable FEP jacketed-SR RG402/KS2 SR tinned copper-SR silvered copper-SR non magnetic-SR aluminium)	B-32 to B-35
.250" cable (SR RG401/KS3-SR aluminium)	B-35 to B-36

Radiall cable groups

Example for flexible cables: 5/50 S	<ul style="list-style-type: none"> — cable outer diameter in mm (2.6 mm, 5 mm, 10 mm, 11 mm,...) — characteristic impedance (50Ω, 75Ω) — number of shields (S=single, D=double)
Example for corrugated cables: 1/2 spiral	<ul style="list-style-type: none"> — cable outer conductor diameter in fraction of inch (1/4", 3/8", 1/2",...)
Example for semi-rigid & handformable cables: .141"	<ul style="list-style-type: none"> — cable outer conductor diameter in inches (.085", .141", .250",...)


INTRODUCTION

Radiall is highly recognized as a leading manufacturer of coaxial connectors, cable and cable assemblies.

Radiall has the best manufacturing technology and processes. As a result, we are one of the only manufacturers that have fully mastered foam PTFE wrapping technology. This capability enables us to supply cable assemblies featuring the highest level of performance, stability and repeatability.


In addition, Radiall has high precision stripping and cutting machines, soldering and cleaning equipment.

Radiall offers five standard ranges of cable for a wide variety of applications for the telecom, military, instrumentation, medical and broadcast markets.

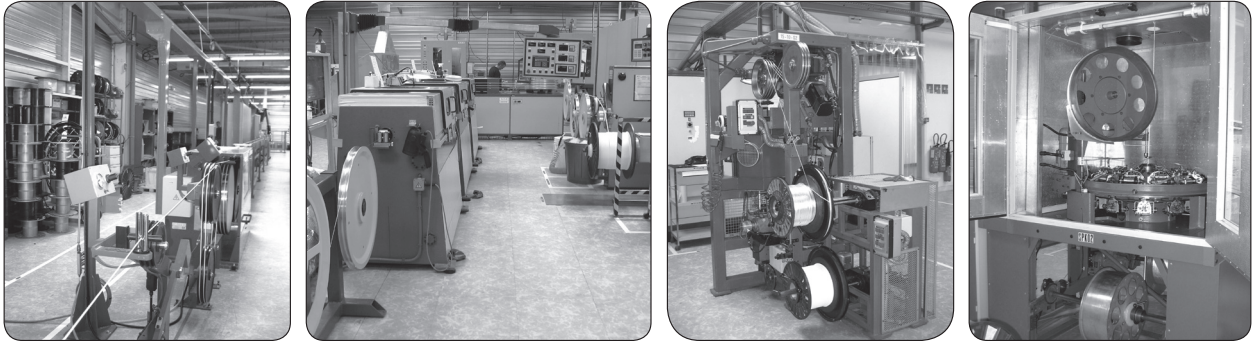

REQUIREMENTS FOR DESIGNING A CUSTOM CABLE-ASSEMBLY

Start with identifying the needed components and the required information for your cable assembly:

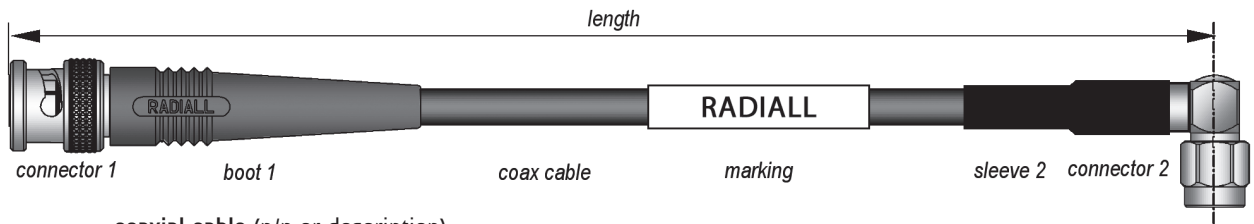

- coaxial cable (p/n or description)
- connector 1 (p/n or description)
- optional boot 1 or heatshrink sleeve 1 (p/n or description)
- connector 2 (p/n or description)
- optional boot or sleeve 2 (p/n or description)
- length: radiall standard = overall length (or please specify if length between reference planes)
- + length tolerance (radiall standard = $\pm 2\%$)
- marking: Radiall standard = RADIALL + p/n + batch code (or please specify if different)
- connectors orientation (if needed for right-angle or panel connectors)


If you need a pigtail, you will also need the following dimensions and information:



- stripping A dimension
- stripping B dimension
- stripping C dimension
- tinned inner conductor (if needed)
- tinned braid (if needed)

SPECIFY THE RIGHT CABLE FOR YOUR APPLICATION

Cable assemblies

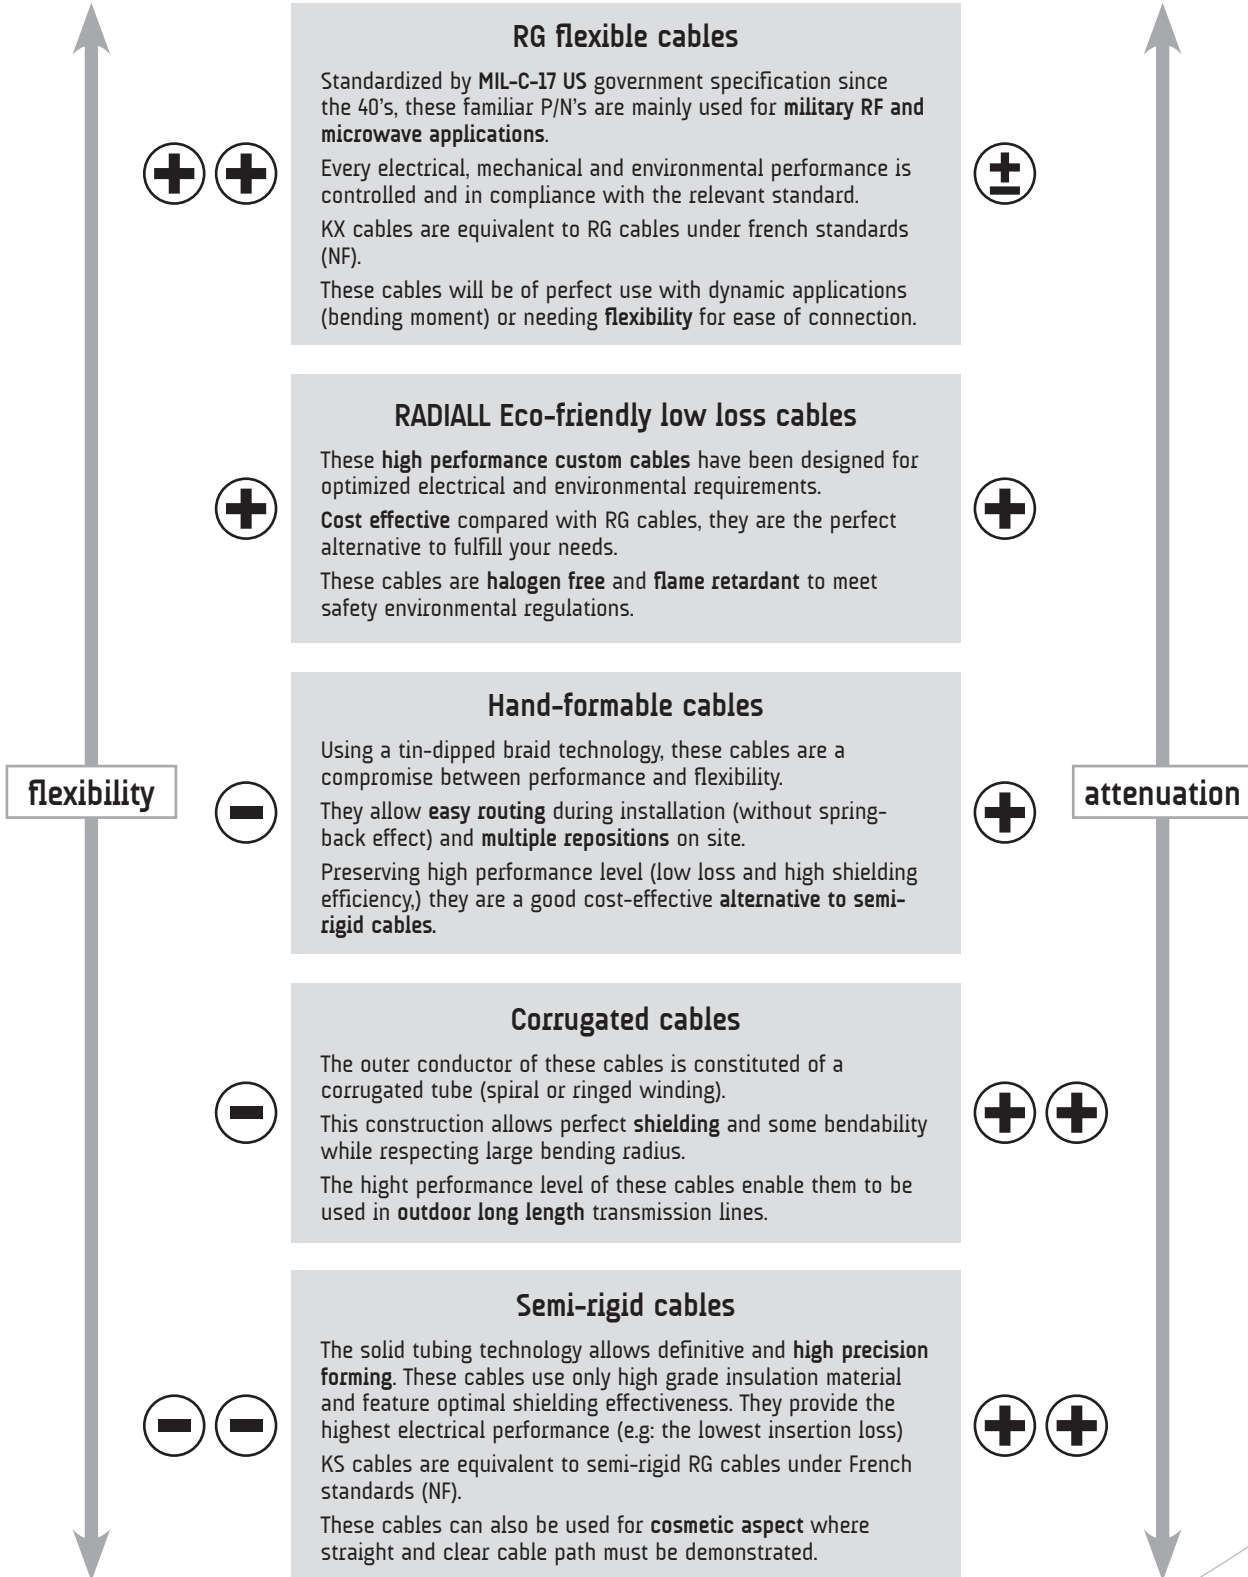

FINDER GUIDE - CABLES VS INSERTION LOSS

STANDARD FLEXIBLE CABLES

Cable group	Cable p/n	Cable type	1 GHz (VHF/UHF) dB/m dB/ft	2 GHz (band L) dB/m dB/ft	3 GHz (band S) dB/m dB/ft	6 GHz (band C) dB/m dB/ft	8 GHz (band C) dB/m dB/ft	12.4 GHz (band X) dB/m dB/ft	18 GHz (band Ku) dB/m dB/ft
0.8/50 S	C291 042 066	132390 type	2.41/0.73	3.51/1.06	4.93/1.49				
1/50 S	C291 050 066	50 VMTX type	2.12/0.64	3.36/1.02	4.45/1.35				
1/75 S	C291 055 076	75 VMTX type	2.22/0.67	3.14/0.95					
2/50 S	C291 145 007/017	RG178/KX21	5+	1.54/0.47	2.20/0.67	2.72/0.82			
	C291 140 087	RG178 non mag type		1.34/0.41	1.92/0.58	2.37/0.72			
2/50 D	C291 146 087	124416 type		1.34/0.41	1.92/0.58	2.37/0.72			
2/75 S	C291 147 060	296775 type		1.38/0.42	1.98/0.60	2.46/0.75			
2.6/50 S	C291 150 000/010	RG174/KX3B	5+	1.07/0.32					
	C291 170 007/017	RG316/KX22A	5+	0.86/0.26	1.24/0.38	1.54/0.47			
2.6/50 D	C291 185 067	RD316	5+	0.86/0.26	1.24/0.38	1.54/0.47			
2.6/75 S	C291 210 007	RG179	5+	0.95/0.29	1.37/0.41	1.70/0.51			
5/50 S	C291 305 000/010	RG58/KX15	5+	0.67/0.20					
5/50 D	C291 320 007	RG142	5+	0.44/0.13	0.65/0.20	0.81/0.25	1.22/0.37	1.45/0.44	1.90/0.58
	C291 330 000	RG223	5+	0.46/0.14	0.67/0.20	0.85/0.26	1.27/0.38	1.51/0.46	1.97/0.60
	C291 324 007	RG400		0.52/0.16	0.76/0.23	0.95/0.29	1.42/0.43	1.68/0.51	2.19/0.66
	C291 322 017	KX23		0.48/0.14	0.70/0.21	0.89/0.27	1.35/0.41	1.61/0.49	
	C291 325 270	POWER142		0.41/0.12	0.58/0.18	0.72/0.22			
6/75 S	C291 360 000	RG59	5+	0.44/0.13					
	C291 361 012	KX6A	5+	0.48/0.15					
10/50 S	C291 510 000/010	RG213/KX4	5+	0.24/0.07					
10/50 D	C291 511 007	RG393		0.23/0.07	0.35/0.11	0.45/0.14	0.71/0.21	0.86/0.26	1.07(11)/0.32(11)
11/50 D	C291 600 000/010	RG214/KX13		0.24/0.07	0.36/0.11	0.47/0.14	0.73/0.22	0.89/0.27	1.1(11)/0.33(11)
11/75 D	C291 610 000	RG216		0.32/0.10	0.48/0.14	0.60/0.18			

(11) = 11 GHz

LOW-LOSS ECO-FRIENDLY FLEXIBLE CABLES

(alternative to RG cables - in accordance with RoHS regulation)

Cable group	Cable p/n	Cable type	1 GHz (VHF/UHF) dB/m dB/ft	2 GHz (band L) dB/m dB/ft	3 GHz (band S) dB/m dB/ft	6 GHz (band C) dB/m dB/ft	8 GHz (band C) dB/m dB/ft	12.4 GHz (band X) dB/m dB/ft	18 GHz (band Ku) dB/m dB/ft
2.6/50 S	C291 999 904	ECO316	5+	0.76/0.23	1.09/0.33	1.34/0.41			
	C291 171 089	ECO316X		0.96/0.29	1.45/0.44	1.85/0.56			
2.6/50 D	C291 999 905	ECO316D	5+	0.76/0.23	1.09/0.33	1.34/0.41			
	C291 217 020	ECO316DX		0.86/0.26	1.30/0.40	1.68/0.51	2.64/0.80		
5/50 D	C291 325 290	ECO142	5+	0.41/0.12	0.58/0.18	0.72/0.22			
	C291 320 180	ECO142X		0.54/0.16	0.83/0.25	1.07/0.32	1.70/0.51		
6/50 D	C291 326 490	ECO230		0.28/0.08	0.40/0.12	0.50/0.15	0.59/0.18(4)		
10/50 D	C291 491 060	ECO393	5+	0.16/0.05	0.24/0.07	0.30/0.09			
	C291 512 020	ECO393X		0.29/0.09	0.47/0.14	0.64/0.19	1.11/0.34		

(4) = 4 GHz

LOW-LOSS FLEXIBLE CABLES

Cable group	Cable p/n	Cable type	1 GHz (VHF/UHF) dB/m dB/ft	2 GHz (band L) dB/m dB/ft	3 GHz (band S) dB/m dB/ft	6 GHz (band C) dB/m dB/ft	8 GHz (band C) dB/m dB/ft	12.4 GHz (band X) dB/m dB/ft	18 GHz (band Ku) dB/m dB/ft
LMR200	C291 316 070	LMR200	0.34/0.10	0.49/0.15	0.61/0.18	0.88/0.27			
LMR400	C291 516 070	LMR400	0.14/0.04	0.20/0.06	0.25/0.07	0.37/0.11			
LMR600	C291 626 070	LMR600	0.09/0.03	0.13/0.04	0.16/0.05	0.25/0.07			

5+: Service+ program fast delivery

STANDARD FLEXIBLE HD CABLES

Cable group	Cable p/n	Cable type	1 GHz (VHF/UHF) dB/m dB/ft	2 GHz (band L) dB/m dB/ft	3 GHz (band S) dB/m dB/ft	4.5 GHz (band C) dB/m dB/ft	8 GHz (band C) dB/m dB/ft	12.4 GHz (band X) dB/m dB/ft	18 GHz (band Ku) dB/m dB/ft
4.6/75 D	C291 333 039	HD 0.6/2.8 mini RG59 type	0.34/0.10	0.50/0.15	0.62/0.19				
6/75 D	C291 360 093	HD 0.8/3.7 RG59 type	0.25/0.07	0.35/0.11	0.44/0.13	0.54/0.16			
7/75 D	C291 384 083	HD 1.0/4.8 RG6 type	0.19/0.06	0.28/0.08	0.35/0.11	0.44/0.13			

CORRUGATED CABLES (spiral outer shielding)

Cable group	Cable p/n	Cable type	2 GHz (band L) dB/m dB/ft	3 GHz (band S) dB/m dB/ft	6 GHz (band C) dB/m dB/ft	8 GHz (band C) dB/m dB/ft	12.4 GHz (band X) dB/m dB/ft	18 GHz (band Ku) dB/m dB/ft	20 GHz (band Ku) dB/m dB/ft
Celiflex 1/4"	C291 993 170	HCF 1/4"-50 AlCu	0.27/0.08	0.34/0.10	0.51/0.15	0.60/0.18	0.78/0.24	0.99/0.30	1.06/0.32
Celiflex 3/8"	C291 996 170	HCF 3/8" CuH-50 AlCu	0.19/0.06	0.24/0.07	0.36/0.11	0.43/0.13	0.54(11.7)/0.16(11.7)		
Celiflex 1/2"	C291 994 170	HCF 1/2" CuH-50 AlCu	0.16/0.05	0.20/0.06	0.30/0.09	0.36/0.11	0.42(10)/0.13(11.7)		

(11.7) = 11.7 GHz (10) = 10 GHz

HAND-FORMABLE AND SEMI-RIGID CABLES

Cable group	Cable p/n	Cable type	2 GHz (band L) dB/m dB/ft	3 GHz (band S) dB/m dB/ft	6 GHz (band C) dB/m dB/ft	8 GHz (band C) dB/m dB/ft	12.4 GHz (band X) dB/m dB/ft	18 GHz (band Ku) dB/m dB/ft	20 GHz (band Ku) dB/m dB/ft
.047"	C291 855 001	SR copper	1.64/0.50	2.03/0.61	2.93/0.89	3.43/1.04	4.73/1.32	5.39/1.63	5.72/1.73
	C291 855 065	SR tinned copper	1.64/0.50	2.03/0.61	2.93/0.89	3.43/1.04	4.73/1.32	5.39/1.63	5.72/1.73
.085"	C291 844 065	Handformable unjacketed	0.97/0.29	1.21/0.37	1.78/0.54	2.10/0.64	2.71/0.82	3.39/1.03	3.62/1.10
	C291 850 001	SR RG405/KS1	0.94/0.29	1.18/0.36	1.73/0.53	2.05/0.62	2.64/0.80	3.31/1.00	3.53/1.07
	C291 850 005	SR tinned copper	0.94/0.29	1.18/0.36	1.73/0.53	2.05/0.62	2.64/0.80	3.31/1.00	3.53/1.07
	C291 851 001	SR non magnetic	0.94/0.29	1.18/0.36	1.73/0.53	2.05/0.62	2.64/0.80	3.31/1.00	3.53/1.07
	C291 844 187	SR aluminium	0.98/0.30	1.22/0.37	1.80/0.54	2.12/0.64	2.73/0.83	3.41/1.03	3.64/1.10
.141"	C291 864 065	Handformable unjacketed S+	0.57/0.17	0.72/0.22	1.09/0.33	1.30/0.39	1.71/0.52	2.18/0.66	2.34/0.71
	C291 866 378	Handformable FEP jacketed	0.63/0.19	0.80/0.24	1.20/0.36	1.42/0.43	1.87/0.57	2.37/0.72	2.54/0.77
	C291 860 001	SR RG402/KS2	0.50/0.15	0.64/0.19	0.97/0.30	1.17/0.35	1.55/0.47	1.99/0.06	2.14/0.65
	C291 862 005	SR tinned copper	0.50/0.15	0.64/0.19	0.97/0.30	1.17/0.35	1.55/0.47	1.99/0.06	2.14/0.65
	C291 861 066	SR silvered copper	0.50/0.15	0.64/0.19	0.97/0.30	1.17/0.35	1.55/0.47	1.99/0.06	2.14/0.65
	C291 861 061	SR non magnetic	0.50/0.15	0.64/0.19	0.97/0.30	1.17/0.35	1.55/0.47	1.99/0.60	2.14/0.65
	C291 864 187	SR aluminium	0.53/0.16	0.67/0.20	1.02/0.31	1.23/0.37	1.62/0.49	2.08/0.63	2.23/0.38
.250"	C291 870 001	SR RG401/KS3	0.31/0.09	0.41/0.12	0.64/0.20	0.79/0.24	1.08/0.33	1.42/0.43	1.54/0.47
	C291 874 187	SR aluminium	0.33/0.10	0.43/0.13	0.68/0.21	0.83/0.25	1.13/0.34	1.48/0.45	1.60/0.49

S+: Service+ program fast delivery

FLEXIBLE CABLE 0.8/50 S (132390 type)



P/N: C291 042 066

APPLICATION NOTE

The very small outer diameter and bending moment of this cable allow very easy routing during installation.

Its very light weight makes it perfect to be used in all miniature and space saving applications.

The insulation and jacket materials allow this cable to be used in severe thermal conditions.

CONSTRUCTION / DIMENSIONS

	material	mm	inches
center conductor	solid SPC ⁽¹⁾	0.16	0.006
dielectric	solid PFA ⁽²⁾	0.50	0.020
inner shield	SPC ⁽¹⁾ braid	0.70	0.028
outer shield	-	-	-
jacket	white FEP ⁽³⁾	0.83 max	0.033 max

ELECTRICAL CHARACTERISTICS

characteristic impedance	50Ω ± 3Ω	
operating frequency range	DC - 3 GHz	
shielding effectiveness	40 dB	
voltage withstanding	18 000 V rms	
peak power	6 kW	
capacitance	98.7 pF / m	29.9 pF / ft
velocity of propagation	69 % (4.8 ns / m)	

MECHANICAL CHARACTERISTICS

recommended minimum bending radius	4 mm	0.157 inch
weight	1.8 g / m	0.001 lbs / ft

ENVIRONMENTAL CHARACTERISTICS

operating temperature range	-50 / +200 °C	-58 / +392 °F
fire resistance	yes (UL94V0)	
halogen free	no	

FREQUENCY / ATTENUATION (typ.) / CW MAX POWER (sea level / 40 °C)

GHz	dB / m	dB / ft	Watts
0.1	0.64	0.19	45
0.2	0.88	0.27	34
0.3	1.90	0.58	28
0.4	1.28	0.39	22
0.5	1.48	0.45	20
1.0	2.41	0.73	14
1.5	3.03	0.92	12
2.0	3.51	1.06	10
2.5	4.20	1.27	9
3.0	4.93	1.49	8

⁽¹⁾ SPC = Silver Plated Copper

⁽²⁾ PFA = PerFluoroAlkoxy

⁽³⁾ FEP = Fluorinated Ethylene Propylene

FLEXIBLE CABLE 1/50 S (50 VMTX type)



P/N: C291 050 066

APPLICATION NOTE

The very small outer diameter and bending moment of this cable allow very easy routing during installation.

Its very light weight makes it perfect to be used in all miniature and space saving applications.

The insulation and jacket materials allow this cable to be used in severe thermal conditions.

CONSTRUCTION / DIMENSIONS

	material	mm	inches
center conductor	solid SPC ⁽¹⁾	0.17	0.007
dielectric	solid PTFE ⁽²⁾	0.52	0.020
inner shield	SPC ⁽¹⁾ braid	0.70	0.028
outer shield	-	-	-
jacket	white FEP ⁽³⁾	1.17	0.046

ELECTRICAL CHARACTERISTICS

characteristic impedance	50Ω ± 5Ω	
operating frequency range	DC - 3 GHz	
shielding effectiveness	40 dB	
voltage withstanding	19 000 V rms	
peak power	7 kW	
capacitance	94 pF / m	28.5 pF / ft
velocity of propagation	69 % (4.8 ns / m)	

MECHANICAL CHARACTERISTICS

recommended minimum bending radius	6 mm	0.236 inch
weight	3 g / m	0.002 lbs / ft

ENVIRONMENTAL CHARACTERISTICS

operating temperature range	-90 / +200 °C	-130 / +392 °F
fire resistance	yes (UL94V0)	
halogen free	no	

FREQUENCY / ATTENUATION (typ.) / CW MAX POWER (sea level / 40 °C)

GHz	dB / m	dB / ft	Watts
0.1	0.54	0.16	82
0.2	0.80	0.24	58
0.3	1.01	0.31	45
0.4	1.20	0.36	39
0.5	1.37	0.42	34
1.0	2.12	0.64	25
1.5	2.76	0.84	21
2.0	3.36	1.02	17
2.5	3.91	1.19	15
3.0	4.45	1.35	14
attenuation calculation (dB/m)	(1.51 x √f GHz) + (0.61 x f GHz)		

⁽¹⁾ SPC = Silver Plated Copper

⁽²⁾ PTFE = PolyTetraFluoroEthylene

⁽³⁾ FEP = Fluorinated Ethylene Propylene

Note: typical attenuation for a couple of connectors (dB) = 0.045 x √f (GHz)

FLEXIBLE CABLE 1/75 S (75 VMTX type)



P/N: C291 055 076

APPLICATION NOTE

Due to its 75 ohms characteristic impedance, this cable is rather dedicated to TV/Video application.
The very small outer diameter and bending moment allow very easy routing during installation.
Its very light weight makes it perfect to be used in all miniature, space saving and dynamic applications.
Usable in severe thermal conditions.

CONSTRUCTION / DIMENSIONS

	material	mm	inches
center conductor	solid SPCCS ⁽¹⁾	0.10	0.004
dielectric	solid PTFE ⁽²⁾	0.57	0.022
inner shield	SPC ⁽³⁾ braid	0.80	0.031
outer shield	-	-	-
jacket	white FEP ⁽⁴⁾	1.22	0.048

ELECTRICAL CHARACTERISTICS

characteristic impedance	80Ω ± 8Ω	
operating frequency range	DC - 2 GHz	
shielding effectiveness	40 dB	
voltage withstanding	2 600 V rms	
peak power	0.9 kW	
capacitance	60 pF / m	18.3 pF / ft
velocity of propagation	69 % (4.8 ns / m)	

MECHANICAL CHARACTERISTICS

recommended minimum bending radius	6.1 mm	0.240 inch
weight	3 g / m	0.002 lbs / ft

ENVIRONMENTAL CHARACTERISTICS

operating temperature range	-90 / +200 °C	-130 / +392 °F
fire resistance	yes (UL94V0)	
halogen free	no	

FREQUENCY / ATTENUATION (typ.) / CW MAX POWER (sea level / 40 °C)

GHz	dB / m	dB / ft	Watts
0.1	0.70	0.21	86
0.2	0.99	0.30	64
0.3	1.21	0.37	50
0.4	1.40	0.42	41
0.5	1.57	0.47	38
0.6	1.71	0.52	35
0.8	1.98	0.60	30
1.0	2.22	0.67	26
1.5	2.71	0.82	21
2.0	3.14	0.95	18
attenuation calculation (dB/m)	(2.21 x √f GHz) + (0.005 x f GHz)		

⁽¹⁾ SPCCS = Silver Plated Copper covered steel

⁽²⁾ PTFE = PolyTetraFluoroEthylene

⁽³⁾ SPC = Silver Plated Copper

⁽⁴⁾ FEP = Fluorinated Ethylene Propylene

FLEXIBLE CABLE 2/50 S (RG178 - KX21A)



P/N: C291 145 007

(MIL-C-17/93-RG178) S+

P/N: C291 145 017

(NF-C-93/550-KX21A) S+

APPLICATION NOTE

Due to its small diameter and its stranded inner conductor, RG 178 / KX21A is used for applications requiring high flexibility.

Its very low bending moment allows an easy routing during installation.

The insulation and jacket materials allow this cable to be used in severe thermal conditions.

CONSTRUCTION / DIMENSIONS

	material	mm	inches
center conductor	stranded SPCCS ⁽¹⁾	0.30	0.012
dielectric	solid PTFE ⁽²⁾	0.84	0.033
inner shield	SPC ⁽³⁾ braid	1.30	0.051
outer shield	-	-	-
jacket	brown FEP ⁽⁴⁾	1.78	0.07

ELECTRICAL CHARACTERISTICS

characteristic impedance	50Ω ± 3Ω	
operating frequency range	DC - 3 GHz	
shielding effectiveness	40 dB	
voltage withstanding	2 000 V rms	
peak power	1 kW	
capacitance	96 pF / m	29 pF / ft
velocity of propagation	70 % (4.8 ns / m)	

MECHANICAL CHARACTERISTICS

recommended minimum bending radius	7 mm	0.275 inch
weight	8 g / m	0.0053 lbs / ft

ENVIRONMENTAL CHARACTERISTICS

operating temperature range	-55 / +200 °C	-67 / +392 °F
fire resistance	yes (CSA FT6 / IEC 332-2)	
halogen free	no	

FREQUENCY / ATTENUATION (typ.) / CW MAX POWER (sea level / 25 °C)

GHz	dB / m	dB / ft	Watts
0.1	0.48	0.14	190
0.2	0.68	0.21	134
0.3	0.83	0.25	110
0.5	1.08	0.33	85
1.0	1.54	0.47	60
1.5	1.90	0.57	49
2.0	2.20	0.67	42
2.5	2.47	0.75	38
3.0	2.72	0.82	35
attenuation calculation (dB/m)	(1.50 x √f GHz) + (0.04 x f GHz)		
power calculation (W)	60 / √f GHz		

⁽¹⁾ SPCCS = Silver Plated Copper covered steel

⁽²⁾ PTFE = PolyTetraFluoroEthylene

⁽³⁾ SPC = Silver Plated Copper

⁽⁴⁾ FEP = Fluorinated Ethylene Propylene

S+: Service+ program = fast delivery

Note: typical attenuation for a couple of connectors (dB) = 0.045 x √f (GHz)

FLEXIBLE CABLE 2/50 S (non magnetic RG178 type)



P/N: C291 140 087
(MIL-C-17/93-RG178)

APPLICATION NOTE

Based on MIL-C17/93 US standard, this cable is used where non magnetic aspect is required.

In addition the solid inner conductor allows reduced attenuation in comparison with standard RG178.

The insulation and jacket materials allow this cable to be used in severe thermal conditions.

CONSTRUCTION / DIMENSIONS

	material	mm	inches
center conductor	solid SPC ⁽¹⁾	0.29	0.0114
dielectric	solid PTFE ⁽²⁾	0.84	0.033
inner shield	SPC ⁽¹⁾ braid	1.30	0.051
outer shield	-	-	-
jacket	brown FEP ⁽³⁾	1.80	0.071

ELECTRICAL CHARACTERISTICS

characteristic impedance	50Ω ± 2Ω	
operating frequency range	DC - 3 GHz	
shielding effectiveness	40 dB	
voltage withstanding	2 000 V rms	
peak power	1 kW	
capacitance	100 pF / m	30 pF / ft
velocity of propagation	70 % (4.8 ns / m)	

MECHANICAL CHARACTERISTICS

recommended minimum bending radius	9 mm	0.354 inch
weight	8 g / m	0.0053 lbs / ft

ENVIRONMENTAL CHARACTERISTICS

operating temperature range	-55 / +200 °C	-67 / +392 °F
fire resistance	yes (CSA FT6 / IEC 332-2)	
halogen free	no	

FREQUENCY / ATTENUATION (typ.) / CW MAX POWER (sea level / 25 °C)

GHz	dB / m	dB / ft	Watts
0.1	0.42	0.13	253
0.2	0.59	0.18	179
0.3	0.72	0.22	146
0.5	0.94	0.28	113
1.0	1.34	0.41	80
1.5	1.65	0.50	65
2.0	1.92	0.58	57
2.5	2.16	0.65	51
3.0	2.37	0.72	46
attenuation calculation (dB/m)	(1.30 x √f GHz) + (0.04 x f GHz)		
power calculation (W)	80 / √f GHz		

⁽¹⁾ SPC = Silver Plated Copper

⁽²⁾ PTFE = PolyTetraFluoroEthylene

⁽³⁾ FEP = Fluorinated Ethylene Propylene

FLEXIBLE CABLE 2/50 D (124416 type)



P/N: C291 146 087

APPLICATION NOTE

Due to its small diameter this cable will be used for applications requiring flexibility. Its low bending moment allows an easy routing during installation.

The double braid provides a higher level of shielding in comparison with 2mm single braided cables.

In addition the solid inner conductor allows a very good attenuation level.

The insulation and jacket materials allow this cable to be used in severe thermal conditions.

CONSTRUCTION / DIMENSIONS

	material	mm	inches
center conductor	solid SPC ⁽¹⁾	0.29	0.011
dielectric	solid PTFE ⁽²⁾	0.84	0.033
inner shield	SPC braid	1.27	0.050
outer shield	SPC braid	1.60	0.063
jacket	brown FEP ⁽³⁾	2.10	0.083

ELECTRICAL CHARACTERISTICS

characteristic impedance	50Ω ± 2Ω	
operating frequency range	DC - 3 GHz	
shielding effectiveness	80 dB	
voltage withstanding	3 000 V rms	
peak power	1.8 kW	
capacitance	105 pF / m	32 pF / ft
velocity of propagation	69 % (4.8 ns / m)	

MECHANICAL CHARACTERISTICS

recommended minimum bending radius	12.5 mm	0.49 inch
weight	12.5 g / m	0.0083 lbs / ft

ENVIRONMENTAL CHARACTERISTICS

operating temperature range	-90 / +200 °C	-130 / +392 °F
fire resistance	yes (UL94V0)	
halogen free	no	

FREQUENCY / ATTENUATION (typ.) / CW MAX POWER (sea level / 40 °C)

GHz	dB / m	dB / ft	Watts
0.1	0.42	0.13	253
0.2	0.59	0.18	179
0.3	0.72	0.22	146
0.5	0.94	0.28	113
1.0	1.34	0.41	80
1.5	1.65	0.50	65
2.0	1.92	0.58	57
2.5	2.16	0.65	51
3.0	2.37	0.72	46
attenuation calculation (dB/m)	(1.30 x √f GHz) + (0.04 x f GHz)		
power calculation (W)	80 / √f GHz		

⁽¹⁾ SPC = Silver Plated Copper

⁽²⁾ PTFE = PolyTetraFluoroEthylene

⁽³⁾ FEP = Fluorinated Ethylene Propylene

Note: typical attenuation for a couple of connectors (dB) = 0.045 x √f (GHz)

FLEXIBLE CABLE 2/75 S (296775 type)



P/N: C291 147 060

APPLICATION NOTE

Due to its 75 ohms characteristic impedance, this cable is rather dedicated to TV/Video and networks application. Its small diameter and light weight make it perfect to be used in all miniature, space saving and dynamic applications.

CONSTRUCTION / DIMENSIONS

	material	mm	inches
center conductor	solid SPCCS ⁽¹⁾	0.17	0.007
dielectric	solid PE ⁽²⁾	1.00	0.039
inner shield	SPC ⁽³⁾ braid	1.32	0.052
outer shield	-	-	-
jacket	black LSZH PE ⁽⁴⁾	1.90	0.075

ELECTRICAL CHARACTERISTICS

characteristic impedance	75Ω ± 5Ω	
operating frequency range	DC - 3 GHz	
shielding effectiveness	50 dB min	
voltage withstanding	8 000 V rms	
peak power	400 W	
capacitance	67 pF / m	20.1 pF / ft
velocity of propagation	66 % (5 ns / m)	

MECHANICAL CHARACTERISTICS

recommended minimum bending radius	10 mm	0.394 inch
weight	6.6 g / m	0.0044 lbs / ft

ENVIRONMENTAL CHARACTERISTICS

operating temperature range	-60 / +85 °C	-40 / +185 °F
fire resistance	no	
halogen free	yes (IEC 754-2)	

FREQUENCY / ATTENUATION (typ. / 25 °C) / CW MAX POWER (sea level / 40 °C)

GHz	dB / m	dB / ft	Watts
0.1	0.42	0.13	41
0.2	0.60	0.18	29
0.3	0.74	0.22	23
0.4	0.86	0.26	20
0.6	1.06	0.32	16
1.0	1.38	0.42	12
1.5	1.70	0.52	10
2.0	1.98	0.60	8
2.5	2.23	0.68	7
3.0	2.46	0.75	6
attenuation calculation (dB/m)	(1.317 x √f GHz) + (0.06 x f GHz)		

⁽¹⁾ SPCCS = Silver Plated Copper covered steel

⁽²⁾ PE = PolyEthylene

⁽³⁾ SPC = Silver Plated Copper

⁽⁴⁾ LSZH PE = Low Smoke Zero Halogen PolyEthylene

FLEXIBLE CABLE 2.6/50 S (RG174 - KX3B)



P/N: C291 150 000

(MIL-C-17/119-RG174) S+

P/N: C291 150 010

(NF-C-93/550-KX3B) S+

APPLICATION NOTE

For cost effectiveness reasons and for low frequency applications, RG174 may be used instead of RG316 when environmental conditions like operating temperature allow it. This cable is compatible with a large range of connector series.

Cost effective solution

CONSTRUCTION / DIMENSIONS

	material	mm	inches
center conductor	stranded CCS ⁽¹⁾	0.48	0.019
dielectric	solid PE ⁽²⁾	1.52	0.060
inner shield	TC ⁽³⁾ braid	2.21	0.087
outer shield	-	-	-
jacket	black PVC ⁽⁴⁾	2.79	0.110

ELECTRICAL CHARACTERISTICS

characteristic impedance	50Ω ± 2Ω	
operating frequency range	DC - 1 GHz	
shielding effectiveness	40 dB	
voltage withstanding	2 000 V rms	
peak power	14 kW	
capacitance	97.5 pF / m	29.5 pF / ft
velocity of propagation	66 % (5 ns / m)	

MECHANICAL CHARACTERISTICS

recommended minimum bending radius	10 mm	0.394 inch
weight	13 g / m	0.0088 lbs / ft

ENVIRONMENTAL CHARACTERISTICS

operating temperature range	-40 / +85 °C	-40 / +185 °F
fire resistance	no	
halogen free	no	

FREQUENCY / ATTENUATION (typ.) / CW MAX POWER (sea level / 25 °C)

GHz	dB / m	dB / ft	Watts
0.05	0.23	0.07	72
0.1	0.33	0.10	51
0.2	0.47	0.14	36
0.3	0.58	0.17	29
0.5	0.75	0.23	23
0.6	0.82	0.25	21
0.7	0.89	0.27	19
0.8	0.95	0.29	18
1.0	1.07	0.32	16
attenuation calculation (dB/m)	(1.03 x √f GHz) + (0.04 x f GHz)		
power calculation (W)	16 / √f GHz		

⁽¹⁾ CCS = Copper Covered Steel

⁽²⁾ PE = PolyEthylene

⁽³⁾ TC = Tinned Copper

⁽⁴⁾ PVC = PolyVinyl Chloride

S+: Service+ program = fast delivery

Note: typical attenuation for a couple of connectors (dB) = 0.045 x √f (GHz)

FLEXIBLE CABLE 2.6/50 S (RG316 - KX22A)



P/N: C291 170 007
(MIL-C-17/113-RG316) *S+*

P/N: C291 170 017
(NF-C-93/550-KX22A) *S+*

APPLICATION NOTE

RG316 is one of the most popular RG cables. This cable has a good flexibility and a better attenuation than RG174.

Usable in severe thermal conditions, this cable is compatible with a large range of connector series.

CONSTRUCTION / DIMENSIONS

	material	mm	inches
center conductor	stranded SPCCS ⁽¹⁾	0.53	0.021
dielectric	solid PTFE ⁽²⁾	1.52	0.060
inner shield	SPC ⁽³⁾ braid	1.98	0.078
outer shield	-	-	-
jacket	brown FEP ⁽⁴⁾	2.49	0.098

ELECTRICAL CHARACTERISTICS

characteristic impedance	50Ω ± 2Ω	
operating frequency range	DC - 3 GHz	
shielding effectiveness	40 dB	
voltage withstanding	2 000 V rms	
peak power	1.8 kW	
capacitance	96 pF / m	29 pF / ft
velocity of propagation	70 % (4.8 ns / m)	

MECHANICAL CHARACTERISTICS

recommended minimum bending radius	10 mm	0.394 inch
weight	17 g / m	0.0110 lbs / ft

ENVIRONMENTAL CHARACTERISTICS

operating temperature range	-55 / +200 °C	-67 / +392 °F
fire resistance	yes (CSA FT6 / IEC 332-2)	
halogen free	no	

FREQUENCY / ATTENUATION (typ.) / CW MAX POWER (sea level / 25 °C)

GHz	dB / m	dB / ft	Watts
0.1	0.26	0.08	411
0.2	0.37	0.11	291
0.3	0.46	0.14	237
0.5	0.60	0.18	184
1.0	0.86	0.26	130
1.5	1.06	0.32	106
2.0	1.24	0.38	92
2.5	1.40	0.42	82
3.0	1.54	0.47	75
attenuation calculation (dB/m)	(0.82 x √f GHz) + (0.04 x f GHz)		
power calculation (W)	130 / √f GHz		


⁽¹⁾ SPCCS = Silver Plated Copper covered steel

⁽²⁾ PTFE = PolyTetraFluoroEthylene

⁽³⁾ SPC = Silver Plated Copper

⁽⁴⁾ FEP = Fluorinated Ethylene Propylene

LOW LOSS FLEXIBLE CABLE 2.6/50S (ECO316: alternative to RG316)



P/N: C291 999 904 *S+*

APPLICATION NOTE

Designed by RADIAL, ECO316 is an advantageous alternative solution to RG316:

• **Advantageous in term of electrical performance:** its optimized construction allows better attenuation and screening effectiveness than RG316 and RG 174.

• **Advantageous in term of environmental aspect:** halogen and sulphur free, this cable does not emit any toxic substance when submitted to fire. The flame retardant jacket allows ECO316 to meet fire resistance standards.

• **Advantageous in term of price:** ECO316 design has integrated all RADIAL knowledge to reach the best performances with a very competitive price.

ECO316 is UL style 1375 approved.

This cable is compatible with a large range of connector series.

ECO-Friendly cable

Cost effective solution

CONSTRUCTION / DIMENSIONS

	material	mm	inches
center conductor	solid OFC ⁽¹⁾	0.55	0.022
dielectric	foam PE ⁽²⁾	1.55	0.061
inner shield	OFC ⁽¹⁾ braid	1.90	0.075
outer shield	-	-	-
jacket	black LSZH PE ⁽³⁾	2.45	0.096

ELECTRICAL CHARACTERISTICS

characteristic impedance	50Ω ± 2Ω	
operating frequency range	DC - 3 GHz	
shielding effectiveness	50 dB	
voltage withstanding	2 000 V rms	
peak power	1.4 kW	
capacitance	84 pF / m	25.5 pF / ft
velocity of propagation	80 % (4.15 ns / m)	

MECHANICAL CHARACTERISTICS

recommended minimum bending radius	15 mm	0.590 inch
weight	10 g / m	0.0066 lbs / ft

ENVIRONMENTAL CHARACTERISTICS

operating temperature range	-40 / +85 °C	-40 / +185 °F
fire resistance	yes (UL1581 Vw1 / IEC 332-1)	
halogen free	yes (IEC 754-2)	

FREQUENCY / ATTENUATION (typ.) / CW MAX POWER (sea level / 25 °C)

GHz	dB / m	dB / ft	Watts
0.1	0.24	0.07	120
0.2	0.33	0.10	85
0.3	0.41	0.12	69
0.5	0.53	0.16	54
1.0	0.76	0.23	38
1.5	0.94	0.28	31
2.0	1.09	0.33	27
2.5	1.22	0.37	24
3.0	1.34	0.41	22
attenuation calculation (dB/m)	(0.74 x √f GHz) + (0.02 x f GHz)		
power calculation (W)	38 / √f GHz		

⁽¹⁾ OFC = Oxygen Free Copper

⁽²⁾ PE = PolyEthylene

⁽³⁾ LSZH PE = Low Smoke Zero Halogen PolyEthylene

S+: Service+ program = fast delivery

Note: typical attenuation for a couple of connectors (dB) = 0.045 x √f (GHz)

LOW LOSS FLEXIBLE CABLE 2.6/50 S (EC0316X)



ECO-Friendly cable
Cost effective solution

P/N: C291 171 083

APPLICATION NOTE

Designed by RADIALL, EC0316X is an advantageous alternative solution to EC0316 when higher power level is required:

- **Advantageous in term of electrical performance:** the crosslink foam polyethylene used as dielectric material allows higher temperature level (thus power range) than EC0316.
- **Advantageous in term of environmental aspect:** halogen and sulphur free, this cable does not emit any toxic substance when submitted to fire. The flame retardant jacket allows EC0316X to meet fire resistance standards.
- **Advantageous in term of price:** EC0316X design has integrated all RADIALL knowledge to reach the best performances with a very competitive price. EC0316X is UL style 1375 and 3651 approved. This cable is compatible with a large range of standard connector series.

CONSTRUCTION / DIMENSIONS

	material	mm	inches
center conductor	stranded SPC ⁽¹⁾	0.54	0.021
dielectric	X foam PE ⁽²⁾	1.54	0.061
inner shield	SPC ⁽¹⁾ braid	2.05	0.081
jacket	blue LSZH PE ⁽³⁾	2.52	0.099

ELECTRICAL CHARACTERISTICS

characteristic impedance	50Ω ± 2Ω	
operating frequency range	DC - 3 GHz	
shielding effectiveness	35 dB	
voltage withstanding	3 000 V rms	
capacitance	94.5 pF / m	28.7 pF / ft
velocity of propagation	71 % (4.7 ns / m)	

MECHANICAL CHARACTERISTICS

recommended minimum bending radius	5 mm	0.197 inch
weight	16 g / m	0.011 lbs / ft

ENVIRONMENTAL CHARACTERISTICS

operating temperature range	-40 / +105 °C	-40 / +221 °F
fire resistance	yes (UL1581 Vw1 / IEC 332-1)	
halogen free	yes (IEC 754-2)	

FREQUENCY / ATTENUATION (typ.) / CW MAX POWER (sea level / 20 °C)

GHz	dB / m	dB / ft	Watts
0.1	0.27	0.08	285
0.3	0.49	0.15	164
0.5	0.65	0.20	127
0.6	0.72	0.22	116
0.8	0.84	0.26	101
1.0	0.96	0.29	90
1.5	1.22	0.37	73
2.0	1.45	0.44	64
2.5	1.66	0.50	57
3.0	1.85	0.56	52
attenuation calculation (dB/m)	(0.81 x √f GHz) + (0.15 x f GHz)		
power calculation (W)	90 / √f GHz		

⁽¹⁾ SPC = Silver Plated Copper

⁽²⁾ X foam PE = Crosslink foam PolyEthylene

⁽³⁾ LSZH PE = Low Smoke Zero Halogen PolyEthylene

S+: Service+ program = fast delivery

Note: typical attenuation for a couple of connectors (dB) = 0.045 x √f (GHz)

FLEXIBLE CABLE 2.6/50 D (RD316)



P/N: C291 185 067 S+

APPLICATION NOTE

Based on the RG 316 construction, RD316 has an outer shield braid which allows higher screening effectiveness and better mechanical resistance.

Usable in severe thermal conditions, this cable is compatible with a large range of connector series.

CONSTRUCTION / DIMENSIONS

	material	mm	inches
center conductor	stranded SPC ⁽¹⁾	0.53	0.021
dielectric	solid PTFE ⁽²⁾	1.52	0.060
inner shield	SPC ⁽¹⁾ braid	1.90	0.075
outer shield	SPC ⁽¹⁾ braid	2.30	0.091
jacket	brown FEP ⁽³⁾	2.80	0.110

ELECTRICAL CHARACTERISTICS

characteristic impedance	50Ω ± 2Ω	
operating frequency range	DC - 3 GHz	
shielding effectiveness	60 dB	
voltage withstanding	2 000 V rms	
peak power	1.8 kW	
capacitance	96 pF / m	29 pF / ft
velocity of propagation	70 % (4.8 ns / m)	

MECHANICAL CHARACTERISTICS

recommended minimum bending radius	15 mm	0.590 inch
weight	27 g / m	0.0181 lbs / ft

ENVIRONMENTAL CHARACTERISTICS

operating temperature range	-55 / +200 °C	-67 / +392 °F
fire resistance	yes (CSA FT6 / IEC 332-2)	
halogen free	no	

FREQUENCY / ATTENUATION (typ.) / CW MAX POWER (sea level / 25 °C)

GHz	dB / m	dB / ft	Watts
0.1	0.26	0.08	411
0.2	0.37	0.11	291
0.3	0.46	0.14	237
0.5	0.60	0.18	184
1.0	0.86	0.26	130
1.5	1.06	0.32	106
2.0	1.24	0.38	92
2.5	1.40	0.42	82
3.0	1.54	0.47	75
attenuation calculation (dB/m)	(0.82 x √f GHz) + (0.04 x f GHz)		
power calculation (W)	130 / √f GHz		

⁽¹⁾ SPC = Silver Plated Copper

⁽²⁾ PTFE = PolyTetraFluoroEthylene

⁽³⁾ FEP = Fluorinated Ethylene Propylene

LOW LOSS FLEXIBLE CABLE 2.6/50 D (ECO316D: alternative to RD316)



ECO-Friendly cable
Cost effective solution

P/N: C291 999 905 S+

APPLICATION NOTE

Designed by RADIALL, ECO316D is an advantageous alternative solution to RD316:

- **Advantageous in term of electrical performance:** its optimized construction allows better attenuation and screening effectiveness than RD316.

- **Advantageous in term of environmental aspect:** halogen and sulphur free, this cable does not emit any toxic substance when submitted to fire. The flame retardant jacket allows ECO316D to meet fire resistance standards.

- **Advantageous in term of price:** ECO316D design has integrated all RADIALL knowledge to reach the best performances with a very competitive price. ECO316D is UL style 1375 approved.

This cable is compatible with a large range of connector series.

CONSTRUCTION / DIMENSIONS

	material	mm	inches
center conductor	solid OFC ⁽¹⁾	0.55	0.022
dielectric	foam PE ⁽²⁾	1.55	0.061
inner shield	OFC ⁽¹⁾ braid	1.90	0.075
outer shield	OFC ⁽¹⁾ braid	2.30	0.091
jacket	black LSZH PE ⁽³⁾	2.80	0.110

ELECTRICAL CHARACTERISTICS

characteristic impedance	50Ω ± 2Ω	
operating frequency range	DC - 3 GHz	
shielding effectiveness	65 dB	
voltage withstanding	2 000 V rms	
peak power	1.4 kW	
capacitance	84 pF / m	25.5 pF / ft
velocity of propagation	80 % (4.15 ns / m)	

MECHANICAL CHARACTERISTICS

recommended minimum bending radius	15 mm	0.590 inch
weight	16 g / m	0.0106 lbs / ft

ENVIRONMENTAL CHARACTERISTICS

operating temperature range	-40 / +85 °C	-40 / +185 °F
fire resistance	yes (UL 1581 VW1 / IEC 332-1)	
halogen free	yes (IEC 754-2)	

FREQUENCY / ATTENUATION (typ.) / CW MAX POWER (sea level / 25 °C)


GHz	dB / m	dB / ft	Watts
0.1	0.24	0.07	120
0.2	0.33	0.10	85
0.3	0.41	0.12	69
0.5	0.53	0.16	54
1.0	0.76	0.23	38
1.5	0.94	0.28	31
2.0	1.09	0.33	27
2.5	1.22	0.37	24
3.0	1.34	0.41	22
attenuation calculation (dB/m)	(0.74 x √f GHz) + (0.02 x f GHz)		
power calculation (W)	38 / √f GHz		

⁽¹⁾ OFC = Oxygen Free Copper

⁽²⁾ PE = PolyEthylene

⁽³⁾ LSZH PE = Low Smoke Zero Halogen PolyEthylene

LOW LOSS FLEXIBLE CABLE 2.6/50 D (ECO316DX)



ECO-Friendly cable
Cost effective solution

P/N: C291 217 020

APPLICATION NOTE

Designed by RADIALL, ECO316DX is an advantageous alternative solution to ECO316D when higher power level is required:

- **Advantageous in term of electrical performance:** the crosslink foam polyethylene used as dielectric material allows higher temperature level (thus power range) than ECO316D.

- **Advantageous in term of environmental aspect:** halogen and sulphur free, this cable does not emit any toxic substance when submitted to fire. The flame retardant jacket allows ECO316DX to meet fire resistance standards.

- **Advantageous in term of price:** ECO316DX design has integrated all RADIALL knowledge to reach the best performances with a very competitive price. ECO316DX is UL style 1375 and 3651 approved. This cable is compatible with a large range of standard connector series.

CONSTRUCTION / DIMENSIONS

	material	mm	inches
center conductor	stranded SPC ⁽¹⁾	0.54	0.021
dielectric	X foam PE ⁽²⁾	1.54	0.061
inner shield	SPC ⁽¹⁾ braid	2.03	0.080
outer shield	SPC ⁽¹⁾ braid	2.50	0.098
jacket	black with blue stripe LSZH PE ⁽³⁾	3.16	0.124

ELECTRICAL CHARACTERISTICS

characteristic impedance	50Ω ± 2Ω	
operating frequency range	DC - 6 GHz	
shielding effectiveness	70 dB (DC - 5 GHz)	
voltage withstanding	1 500 V rms	
capacitance	94.5 pF / m	28.7 pF / ft
velocity of propagation	71 % (4.7 ns / m)	

MECHANICAL CHARACTERISTICS

recommended minimum bending radius	5 mm	0.196 inch
weight	21 g / m	0.0140 lbs / ft

ENVIRONMENTAL CHARACTERISTICS

operating temperature range	-40 / +105 °C	-40 / +221 °F
fire resistance	yes (UL1581 VW1 / IEC 332-1)	
halogen free	yes (IEC 754-2)	

FREQUENCY / ATTENUATION (typ.) / CW MAX POWER (sea level / 25 °C)

GHz	dB / m	dB / ft	Watts
0.5	0.58	0.17	127
1.0	0.86	0.26	90
1.5	1.09	0.33	73
2.0	1.30	0.40	64
2.5	1.50	0.45	57
3.0	1.68	0.51	52
3.5	1.85	0.56	48
4.0	2.02	0.61	45
5.0	2.34	0.71	40
6.0	2.64	0.80	37
attenuation calculation (dB/m)	(0.71 x √f GHz) + (0.15 x f GHz)		
power calculation (W)	90 / √f GHz		

⁽¹⁾ SPC = Silver Plated Copper

⁽²⁾ X foam PE = Crosslink foam PolyEthylene

⁽³⁾ LSZH PE = Low Smoke Zero Halogen PolyEthylene

S+: Service+ program = fast delivery

Note: typical attenuation for a couple of connectors (dB) = 0.045 x √f (GHz)

FLEXIBLE CABLE 4.6/75 D (HD 0.6/2.8 - mini RG59 type)



P/N: C291 333 039

APPLICATION NOTE

Due to its 75 ohms characteristic impedance, this cable is rather dedicated to HDTV/Video application.

CONSTRUCTION / DIMENSIONS

	material	mm	inches
center conductor	solid BC ⁽¹⁾	0.60	0.024
dielectric	foam PE ⁽²⁾	2.80	0.110
inner shield	Triplex tape Al ⁽³⁾ /PES ⁽⁴⁾ /Al	2.90	0.114
outer shield	TC ⁽⁵⁾ braid	3.30	0.130
jacket	purple LSZH PE ⁽⁶⁾	4.60	0.181

ELECTRICAL CHARACTERISTICS

characteristic impedance	75Ω ± 3Ω	
operating frequency range	DC - 3 GHz	
shielding effectiveness	-	
voltage withstanding	1 500 V rms	
peak power	-	
capacitance	56 pF / m	17.07 pF / ft
velocity of propagation	78 % (4.3 ns / m)	

MECHANICAL CHARACTERISTICS

recommended minimum bending radius	37 mm	1.46 inch
weight	24 g / m	0.0161 lbs / ft

ENVIRONMENTAL CHARACTERISTICS

operating temperature range	-20 / +70 °C	-4 / +158 °F
fire resistance	yes (IEC 60332-1)	
halogen free	yes (IEC 60754-1 & -2)	

FREQUENCY / ATTENUATION (typ.) / CW MAX POWER (sea level / 25 °C)

GHz	dB / m	dB / ft	Watts
0.05	0.073	0.022	-
0.1	0.103	0.031	-
0.5	0.238	0.072	-
0.8	0.305	0.092	-
1.0	0.343	0.104	-
1.5	0.426	0.129	-
2.0	0.499	0.151	-
2.5	0.563	0.171	-
3.0	0.623	0.189	-
attenuation calculation (dB/m)	(0.32 x √f GHz) + (0.023 x f GHz)		

⁽¹⁾ BC = Bare Copper

⁽²⁾ PE = PolyEthylene

⁽³⁾ Al = Aluminum

⁽⁴⁾ PES = PolyESter

⁽⁵⁾ TC = Tinned Copper

⁽⁶⁾ LSZH PE = Low Smoke Zero Halogen PolyEthylene

FLEXIBLE CABLE 2.6/75 S (RG179)



P/N: C291 210 007
(MIL-C-17/94-RG179) S+

APPLICATION NOTE

Due to its 75 ohms characteristic impedance, RG179 is rather dedicated to TV/Video application.

Its small internal stranded inner conductor diameter allows high flexibility for an easy routing.

Usable in severe thermal conditions.

CONSTRUCTION / DIMENSIONS

	material	mm	inches
center conductor	stranded SPCCS ⁽¹⁾	0.30	0.012
dielectric	solid PTFE ⁽²⁾	1.60	0.063
inner shield	SPC ⁽³⁾ braid	2.00	0.079
outer shield	-	-	-
jacket	brown FEP ⁽⁴⁾	2.54	0.100

ELECTRICAL CHARACTERISTICS

characteristic impedance	75Ω ± 3Ω	
operating frequency range	DC - 3 GHz	
shielding effectiveness	40 dB	
voltage withstanding	2 000 V rms	
peak power	1.6 kW	
capacitance	69 pF / m	21 pF / ft
velocity of propagation	70 % (4.8 ns / m)	

MECHANICAL CHARACTERISTICS

recommended minimum bending radius	10 mm	0.400 inch
weight	14.5 g / m	0.0097 lbs / ft

ENVIRONMENTAL CHARACTERISTICS

operating temperature range	-55 / +200 °C	-67 / +392 °F
fire resistance	yes (CSA FT6 / IEC 332-2)	
halogen free	no	

FREQUENCY / ATTENUATION (typ.) / CW MAX POWER (sea level / 25 °C)

GHz	dB / m	dB / ft	Watts
0.1	0.29	0.09	791
0.2	0.41	0.13	559
0.3	0.51	0.15	456
0.5	0.66	0.20	354
1.0	0.95	0.29	250
1.5	1.17	0.36	204
2.0	1.37	0.41	117
2.5	1.54	0.47	158
3.0	1.70	0.51	144
attenuation calculation (dB/m)	(0.91 x √f GHz) + (0.04 x f GHz)		
power calculation (W)	250 / √f GHz		

⁽¹⁾ SPCCS = Silver Plated Copper Covered Steel

⁽²⁾ PTFE = PolyTetraFluoroEthylene


⁽³⁾ SPC = Silver Plated Copper

⁽⁴⁾ FEP = Fluorinated Ethylene Propylene

S+: Service+ program = fast delivery

Note: typical attenuation for a couple of connectors (dB) = 0.045 x √f (GHz)

FLEXIBLE CABLE 5/50 S (RG58 - KX15)



P/N: C291 305 000

(MIL-C-17/28-RG58) S+

P/N: C291 305 010

(NF-C-93/550-KX15) S+

APPLICATION NOTE

RG58 is one of the most popular RG cables. Due to its construction and raw materials construction, RG58 / KX15 is far to be as performant as the equivalent 5/50 cables (RG142, RG223, ECO142)

However, this very flexible cable must be considered for applications requiring low electrical performance and reduced cost.

CONSTRUCTION / DIMENSIONS

	material	mm	inches
center conductor	stranded TC ⁽¹⁾	0.90	0.035
dielectric	solid PE ⁽²⁾	2.95	0.116
inner shield	TC ⁽¹⁾ braid	3.66	0.144
outer shield	-	-	-
jacket	black PVC ⁽³⁾	4.95	0.195

ELECTRICAL CHARACTERISTICS

characteristic impedance	50Ω ± 2Ω	
operating frequency range	DC - 1 GHz	
shielding effectiveness	40 dB	
voltage withstanding	5 000 V rms	
peak power	2.6 kW	
capacitance	96 pF / m	29 pF / ft
velocity of propagation	66 % (5 ns / m)	

MECHANICAL CHARACTERISTICS

recommended minimum bending radius	20 mm	0.787 inch
weight	35 g / m	0.0234 lbs / ft

ENVIRONMENTAL CHARACTERISTICS

operating temperature range	-40 / +85 °C	-40 / +185 °F
fire resistance	no	
halogen free	no	

FREQUENCY / ATTENUATION (typ.) / CW MAX POWER (sea level / 25 °C)

GHz	dB / m	dB / ft	Watts
0.05	0.14	0.04	246
0.1	0.20	0.06	174
0.2	0.29	0.09	123
0.3	0.36	0.11	100
0.5	0.47	0.14	78
0.6	0.51	0.16	71
0.7	0.56	0.17	66
0.8	0.60	0.18	61
1.0	0.67	0.20	55
attenuation calculation (dB/m)	(0.63 x √f GHz) + (0.04 x f GHz)		
power calculation (W)	55 / √f GHz		

⁽¹⁾ TC = Tinned Copper

⁽²⁾ PE = Polyethylene

⁽³⁾ PVC = PolyVinyl Chloride

FLEXIBLE CABLE 5/50 D (RG142)



P/N: C291 320 007

(MIL-C-17/158-RG142) S+

APPLICATION NOTE

RG142 is one of the most popular RG cables.

This cable presents a good compromise between flexibility and electrical performances.

RG142 will be selected among other 5/50 RG's for applications requiring high frequency range and low attenuation.

Usable in severe thermal conditions.

CONSTRUCTION / DIMENSIONS

	material	mm	inches
center conductor	solid SPCCS ⁽¹⁾	0.94	0.037
dielectric	solid PTFE ⁽²⁾	2.95	0.116
inner shield	SPC ⁽³⁾	-	-
outer shield	SPC ⁽³⁾ braid	4.19	0.165
jacket	brown FEP ⁽⁴⁾	4.95	0.195

ELECTRICAL CHARACTERISTICS

characteristic impedance	50Ω ± 2Ω	
operating frequency range	DC - 12.4 GHz	
shielding effectiveness	65 dB (DC - 3GHz)	
voltage withstanding	5 000 V rms	
peak power	3.4 kW	
capacitance	97 pF / m	29.3 pF / ft
velocity of propagation	70 % (4.8 ns / m)	

MECHANICAL CHARACTERISTICS

recommended minimum bending radius	25 mm	0.984 inch
weight	64 g / m	0.043 lbs / ft

ENVIRONMENTAL CHARACTERISTICS

operating temperature range	-55 / +200 °C	-67 / +392 °F
fire resistance	yes (CSA FT6 / IEC 332-2)	
halogen free	no	

FREQUENCY / ATTENUATION (typ.) / CW MAX POWER (sea level / 25 °C)

GHz	dB / m	dB / ft	Watts
0.5	0.30	0.09	665
1.0	0.44	0.13	470
1.5	0.55	0.17	384
2.0	0.65	0.20	332
3.0	0.81	0.25	271
6.0	1.22	0.37	192
8.0	1.45	0.44	166
10.0	1.66	0.50	149
12.4	1.90	0.58	133
attenuation calculation (dB/m)	(0.40 x √f GHz) + (0.04 x f GHz)		
power calculation (W)	470 / √f GHz		

⁽¹⁾ SPCCS = Silver Plated Copper Covered Steel

⁽²⁾ PTFE = PolyTetraFluoroEthylene


⁽³⁾ SPC = Silver Plated Copper

⁽⁴⁾ FEP = Fluorinated Ethylene Propylene

S+ : Service+ program = fast delivery

Note: typical attenuation for a couple of connectors (dB) = 0.045 x √f (GHz)

LOW LOSS FLEXIBLE CABLE 5/50 D (ECO142: alternative to RG142)



ECO-Friendly cable
Cost effective solution

P/N: C291 325 290 S+

APPLICATION NOTE

Designed by RADIALL, ECO142 is an advantageous alternative solution to RG142:

- **Advantageous in term of electrical performance:** its optimized construction allows better attenuation and screening effectiveness than RG142.
- **Advantageous in term of environmental aspect:** halogen and sulphur free, this cable does not emit any toxic substance when submitted to fire. The flame retardant jacket allows ECO142 to meet fire resistance standards.
- **Advantageous in term of price:** ECO142 design has integrated all RADIALL knowledge to reach the best performances with a very competitive price. ECO142 is UL style 1375 approved. This cable is compatible with a large range of connector series.

CONSTRUCTION / DIMENSIONS

	material	mm	inches
center conductor	solid OFC ⁽¹⁾ copper	0.95	0.037
dielectric	foam PE ⁽²⁾	2.85	0.112
inner shield	Al ⁽³⁾ foil	3.10	0.122
outer shield	TC ⁽⁴⁾ braid	3.50	0.138
jacket	black LSZH PE ⁽⁵⁾	4.50	0.177

ELECTRICAL CHARACTERISTICS

characteristic impedance	50Ω ± 2Ω	
operating frequency range	DC - 3 GHz	
shielding effectiveness	80 dB (DC - 3 GHz)	
voltage withstanding	5 000 V rms	
peak power	2.7 kW	
capacitance	87 pF / m	26.4 pF / ft
velocity of propagation	77 % (4.3 ns / m)	

MECHANICAL CHARACTERISTICS

recommended minimum bending radius	15 mm	0.590 inch
weight	36 g / m	0.0242 lbs / ft

ENVIRONMENTAL CHARACTERISTICS

operating temperature range	-40 / +85 °C	-40 / +185 °F
fire resistance	yes (UL1581 VW1 / IEC 332-1)	
halogen free	yes (IEC 754-2)	

FREQUENCY / ATTENUATION (typ.) / CW MAX POWER (sea level / 25 °C)

GHz	dB / m	dB / ft	Watts
0.1	0.12	0.04	411
0.2	0.18	0.05	291
0.3	0.22	0.07	237
0.5	0.28	0.09	184
1.0	0.41	0.12	130
1.5	0.50	0.15	106
2.0	0.58	0.18	92
2.5	0.66	0.20	82
3.0	0.73	0.22	75
attenuation calculation (dB/m)	(0.385 x √f GHz) + (0.02 x f GHz)		
power calculation (W)	130 / √f GHz		

⁽¹⁾ OFC = Oxygen Free Copper

⁽²⁾ PE = PolyEthylene

⁽³⁾ Al = Aluminum


⁽⁴⁾ TC = Tinned Copper

⁽⁵⁾ LSZH PE = Low Smoke Zero Halogen PolyEthylene

S+: Service+ program = fast delivery

Note: typical attenuation for a couple of connectors (dB) = 0.045 x √f (GHz)

LOW LOSS FLEXIBLE CABLE 5/50 D (ECO142X)



ECO-Friendly cable
Cost effective solution

P/N: C291 320 180

APPLICATION NOTE

Designed by RADIALL, ECO142X is an advantageous alternative solution to ECO142 when higher power level is required:

- **Advantageous in term of electrical performance:** the crosslink foam polyethylene used as dielectric material allows higher temperature level (thus power range) than ECO142.
- **Advantageous in term of environmental aspect:** halogen and sulphur free, this cable does not emit any toxic substance when submitted to fire. The flame retardant jacket allows ECO142X to meet fire resistance standards.
- **Advantageous in term of price:** ECO142X design has integrated all RADIALL knowledge to reach the best performances with a very competitive price. ECO142X is UL style 1375 and 3651 approved. This cable is compatible with a large range of standard connector series.

CONSTRUCTION / DIMENSIONS

	material	mm	inches
center conductor	solid SPC ⁽¹⁾	0.95	0.037
dielectric	X foam PE ⁽²⁾	2.98	0.117
inner shield	SPC ⁽¹⁾ braid	3.64	0.143
outer shield	SPC ⁽¹⁾ braid	4.30	0.169
jacket	black with blue stripe LSZH PE ⁽³⁾	5.00	0.197

ELECTRICAL CHARACTERISTICS

characteristic impedance	50Ω ± 2Ω	
operating frequency range	DC - 6 GHz	
shielding effectiveness	75 dB (DC - 5 GHz)	
voltage withstanding	5 000 V rms	
capacitance	94.5 pF / m	28.7 pF / ft
velocity of propagation	71 % (4.7 ns / m)	

MECHANICAL CHARACTERISTICS

recommended minimum bending radius	30 mm	1.18 inch
weight	60 g / m	0.0433 lbs / ft

ENVIRONMENTAL CHARACTERISTICS

operating temperature range	-40 / +105 °C	-40 / +221 °F
fire resistance	yes (UL1581 VW1 / IEC 332-1)	
halogen free	yes (IEC 754-2)	

FREQUENCY / ATTENUATION (typ.) / CW MAX POWER (sea level / 25 °C)


GHz	dB / m	dB / ft	Watts
0.5	0.36	0.11	354
1.0	0.54	0.16	250
1.5	0.69	0.21	204
2.0	0.83	0.25	177
2.5	0.95	0.29	158
3.0	1.07	0.32	144
3.5	1.18	0.36	134
4.0	1.29	0.39	125
5.0	1.50	0.45	112
6.0	1.70	0.51	102
attenuation calculation (dB/m)	(0.44 x √f GHz) + (0.103 x f GHz)		
power calculation (W)	250 / √f GHz		

⁽¹⁾ SPC = Silver Plated Copper

⁽²⁾ X foam PE = Crosslink foam PolyEthylene

⁽³⁾ LSZH PE = Low Smoke Zero Halogen PolyEthylene

LOW LOSS FLEXIBLE CABLE 5/50 D (POWER142: alternative to RG142)



P/N: C291 325 270

APPLICATION NOTE

Designed by RADIAL, POWER142 is an advantageous alternative solution to EC0142 when high power level is required:

- **Advantageous in term of electrical performance:** its optimized construction allows better attenuation and screening effectiveness than RG142 and higher power level than EC0142.
- **Advantageous in term of environmental aspect:** the flame retardant jacket allows POWER142 to meet fire resistance standards.
- **Advantageous in term of price:** POWER142 design has integrated all RADIAL knowledge to reach the best performances with a very competitive price. POWER142 is UL style 1375 approved.

This cable is compatible with a large range of connector series.

CONSTRUCTION / DIMENSIONS

	material	mm	inches
center conductor	solid SPC ⁽¹⁾	0.92	0.036
dielectric	solid PTFE ⁽²⁾	2.97	0.117
inner shield	Al ⁽³⁾ foil	3.20	0.126
outer shield	TC ⁽⁴⁾ braid	3.60	0.142
jacket	black LSZH PE ⁽⁵⁾	4.50	0.177

ELECTRICAL CHARACTERISTICS

characteristic impedance	50Ω ± 2Ω	
operating frequency range	DC - 3 GHz	
shielding effectiveness	90 dB (DC - 3 GHz)	
voltage withstanding	5 000 V rms	
peak power	3.4 kW	
capacitance	97 pF / m	29.3 pF / ft
velocity of propagation	69 % (4.8 ns / m)	

MECHANICAL CHARACTERISTICS

recommended minimum bending radius	25 mm	0.980 inch
weight	40 g / m	0.0269 lbs / ft

ENVIRONMENTAL CHARACTERISTICS

operating temperature range	-40 / +105 °C	-40 / +221 °F
fire resistance	yes (UL1581 VW1 / IEC 332-1)	
halogen free	no	

FREQUENCY / ATTENUATION (typ.) / CW MAX POWER (sea level / 40 °C)

GHz	dB / m	dB / ft	Watts
0.2	0.18	0.05	470
0.4	0.26	0.08	332
0.6	0.32	0.10	271
0.8	0.37	0.11	235
1.0	0.41	0.12	210
1.5	0.50	0.15	171
2.0	0.58	0.18	148
2.5	0.66	0.20	133
3.0	0.72	0.22	121
attenuation calculation (dB/m)	(0.402 x √f GHz) + (0.008 x f GHz)		
power calculation (W)	210 / √f GHz		

⁽¹⁾ SPC = Silver Plated Copper

⁽²⁾ PTFE = PolyTetraFluoroEthylene

⁽³⁾ Al = Aluminum

⁽⁴⁾ TC = Tinned Copper

⁽⁵⁾ LSZH PE = Low Smoke Zero Halogen PolyEthylene

FLEXIBLE CABLE 5/50 D (RG223)



P/N: C291 330 000

(MIL-C-17/84-RG223) S+

APPLICATION NOTE

RG223 is one of the most popular RG cables.

This cable presents a good compromise between flexibility and electrical performances.

RG223 can be used instead of RG142 for cost reasons in applications that do not require high temperature resistance.

CONSTRUCTION / DIMENSIONS

	material	mm	inches
center conductor	solid SPC ⁽¹⁾	0.89	0.035
dielectric	solid PE ⁽²⁾	2.95	0.116
inner shield	SPC ⁽¹⁾ braid	-	-
outer shield	SPC ⁽¹⁾ braid	4.19	0.165
jacket	black PVC ⁽³⁾	5.38	0.212

ELECTRICAL CHARACTERISTICS

characteristic impedance	50Ω ± 2Ω	
operating frequency range	DC - 12.4 GHz	
shielding effectiveness	65 dB (DC - 3 GHz)	
voltage withstanding	5 000 V rms	
peak power	2.6 kW	
capacitance	96 pF / m	29 pF / ft
velocity of propagation	66 % (5 ns / m)	

MECHANICAL CHARACTERISTICS

recommended minimum bending radius	25 mm	0.984 inch
weight	55 g / m	0.0370 lbs / ft

ENVIRONMENTAL CHARACTERISTICS

operating temperature range	-40 / +85 °C	-40 / +185 °F
fire resistance	no	
halogen free	no	

FREQUENCY / ATTENUATION (typ.) / CW MAX POWER (sea level / 25 °C)

GHz	dB / m	dB / ft	Watts
0.5	0.32	0.10	71
1.0	0.46	0.14	50
1.5	0.57	0.17	41
2.0	0.67	0.20	35
3.0	0.85	0.26	29
6.0	1.27	0.38	20
8.0	1.51	0.46	18
10.0	1.73	0.52	16
12.4	1.97	0.60	14
attenuation calculation (dB/m)	(0.42 x √f GHz) + (0.04 x f GHz)		
power calculation (W)	50 / √f GHz		

⁽¹⁾ SPC = Silver Plated Copper


⁽²⁾ PE = PolyEthylene

⁽³⁾ PVC = PolyVinyl Chloride

S+: Service+ program = fast delivery

Note: typical attenuation for a couple of connectors (dB) = 0.045 x √f (GHz)

FLEXIBLE CABLE 5/50 D (RG400)



P/N: C291 324 007
(MIL-C-17/128-RG400) **S+**

APPLICATION NOTE

Due to its stranded inner conductor, RG 400 is much more flexible than RG142 and RG223. This cable will be chosen instead of equivalent RG's for specific applications requiring high flexibility
Usable in severe thermal conditions.

CONSTRUCTION / DIMENSIONS

	material	mm	inches
center conductor	stranded SPC ⁽¹⁾	0.98	0.039
dielectric	solid PTFE ⁽²⁾	2.95	0.116
inner shield	SPC ⁽¹⁾ braid	-	-
outer shield	SPC ⁽¹⁾ braid	4.19	0.165
jacket	brown FEP ⁽³⁾	4.95	0.195

ELECTRICAL CHARACTERISTICS

characteristic impedance	50Ω ± 2Ω	
operating frequency range	DC - 12.4 GHz	
shielding effectiveness	65 dB (DC - 3 GHz)	
voltage withstanding	5 000 V rms	
peak power	3.4 kW	
capacitance	97 pF / m	29.3 pF / ft
velocity of propagation	70 % (4.8 ns / m)	

MECHANICAL CHARACTERISTICS

recommended minimum bending radius	20 mm	0.79 inch
weight	66 g / m	0.0442 lbs / ft

ENVIRONMENTAL CHARACTERISTICS

operating temperature range	-55 / +200 °C	-67 / +392 °F
fire resistance	yes (CSA FT6 / IEC 332-2)	
halogen free	no	

FREQUENCY / ATTENUATION (typ.) / CW MAX POWER (sea level / 25 °C)

GHz	dB / m	dB / ft	Watts
0.5	0.36	0.11	665
1.0	0.52	0.16	470
1.5	0.65	0.20	384
2.0	0.76	0.23	332
3.0	0.95	0.29	271
6.0	1.42	0.43	192
8.0	1.68	0.51	166
10.0	1.92	0.58	149
12.4	2.19	0.66	133
attenuation calculation (dB/m)	(0.48 x √f GHz) + (0.04 x f GHz)		
power calculation (W)	470 / √f GHz		

⁽¹⁾ SPC = Silver Plated Copper

⁽²⁾ PTFE = PolyTetraFluoroEthylene

⁽³⁾ FEP = Fluorinated Ethylene Propylene

FLEXIBLE CABLE 5/50 D (KX23)



P/N: C291 322 017
(NF-C-93/550-KX23)

APPLICATION NOTE

Relevant standard: NF-C-93/550-KX23 (France)
Due to its stranded inner conductor it is much more flexible than RG142 or RG223.
This cable will be chosen instead of equivalent RG's for specific applications requiring high flexibility.
Usable in severe thermal conditions.

CONSTRUCTION / DIMENSIONS

	material	mm	inches
center conductor	stranded SPC ⁽¹⁾	0.92	0.036
dielectric	solid PTFE ⁽²⁾	2.95	0.116
inner shield	SPC braid	-	-
outer shield	SPC braid	4.34	0.171
jacket	Translucent Fiber Glass	5.10	0.201

ELECTRICAL CHARACTERISTICS

characteristic impedance	50Ω ± 2.5Ω	
operating frequency range	DC - 8 GHz	
shielding effectiveness	65 dB (DC - 3 GHz)	
voltage withstanding	5 000 V rms	
peak power	3 kW	
capacitance	95 pF / m	28.8 pF / ft
velocity of propagation	70 % (4.8 ns / m)	

MECHANICAL CHARACTERISTICS

recommended minimum bending radius	30 mm	1.181 inch
weight	70 g / m	0.0466 lbs / ft

ENVIRONMENTAL CHARACTERISTICS

operating temperature range	-55 / +200 °C	-67 / +392 °F
fire resistance	yes (IEC 60332-1)	
halogen free	no	

FREQUENCY / ATTENUATION (typ. / 25 °C) / CW MAX POWER (sea level / 40 °C)

GHz	dB / m	dB / ft	Watts
0.5	0.33	0.10	375
1.0	0.48	0.14	260
1.5	0.60	0.18	210
2.0	0.70	0.21	180
2.5	0.80	0.24	160
3.0	0.89	0.27	146
4.0	1.05	0.32	126
5.0	1.20	0.37	112
6.0	1.35	0.41	102
8.0	1.61	0.49	88
attenuation calculation (dB/m)	(0.427 x √f GHz) + (0.05 x f GHz)		

⁽¹⁾ SPC = Silver Plated Copper

⁽²⁾ PTFE = PolyTetraFluoroEthylene

S+: Service+ program = fast delivery

Note: typical attenuation for a couple of connectors (dB) = 0.045 x √f (GHz)

LOW LOSS FLEXIBLE CABLE 5/50 D (LMR200 type)



P/N: C291 316 070

APPLICATION NOTE

This LMR200 type cable can be considered as an alternative to equivalent diameter corrugated cables.

The main advantage is greater flexibility and bendability allowing easy routing during the installation.

The foam dielectric provides excellent loss and low return loss levels.

The double screen construction (Aluminum foil + tinned copper braid) offers a high level of shielding as well as low leakage.

This cable will be advised for feeder and jumper assemblies in cellular networks as well as applications requiring easy routing.

CONSTRUCTION / DIMENSIONS

	material	mm	inches
center conductor	solid copper	1.12	0.044
dielectric	foam PE ⁽¹⁾	2.95	0.116
inner shield	Al ⁽²⁾ foil	3.07	0.121
outer shield	TC ⁽³⁾ braid	3.66	0.144
jacket	black PE ⁽¹⁾	4.95	0.195

ELECTRICAL CHARACTERISTICS

characteristic impedance	50Ω ± 2Ω	
cut-off frequency	39 GHz	
recommend. operat. freq. range	DC - 6 GHz	
shielding effectiveness	> 90 dB	
voltage withstanding	1 000 V DC	
peak power	2.5 kW	
capacitance	80.3 pF / m	24.5 pF / ft
velocity of propagation	83 % (4.0 ns / m)	

MECHANICAL CHARACTERISTICS

recommended minimum bending radius	12.7 mm	0.50 inch
weight	30 g / m	0.022 lbs / ft

ENVIRONMENTAL CHARACTERISTICS

operating temperature range	-40 / +85 °C	-40 / +185 °F
fire resistance	no	
halogen free	no	

FREQUENCY / ATTENUATION (typ.) / CW TYP POWER (sea level / 40 °C)

GHz	dB / m	dB / ft	Watts
0.1	0.11	0.03	560
0.5	0.24	0.07	240
1.0	0.34	0.10	170
1.5	0.42	0.13	140
2.0	0.49	0.15	120
2.5	0.55	0.17	110
3.0	0.61	0.18	100
4.0	0.71	0.22	80
5.0	0.80	0.24	70
6.0	0.88	0.27	65
attenuation calculation (dB/m)	(0.333 x √f GHz) + (0.011 x f GHz)		

⁽¹⁾ PE = PolyEthylene

⁽²⁾ Al = Aluminum

⁽³⁾ TC = Tinned Copper

LOW LOSS FLEXIBLE CABLE 6/50 D (ECO230)



P/N: C291 326 490

APPLICATION NOTE

Designed by RADIALL, ECO230 is an advantageous alternative solution to 5 mm dia. cables when higher power level is required:

- **Advantageous in term of electrical performance:** its optimized construction allows better attenuation and screening effectiveness than RG cables.

- **Advantageous in term of environmental aspect:** halogen and sulphur free, this cable does not emit any toxic substance when submitted to fire. The flame retardant jacket allows ECO230 to meet fire resistance standards.

- **Advantageous in term of price:** ECO230 design has integrated all RADIALL knowledge to reach the best performances with a very competitive price.

ECO230 is UL style 1375 approved.

CONSTRUCTION / DIMENSIONS

	material	mm	inches
center conductor	OFC ⁽¹⁾ copper	1.46	0.057
dielectric	foam PE ⁽²⁾	4.07	0.160
inner shield	Al ⁽³⁾ foil	4.27	0.168
outer shield	TC ⁽⁴⁾ braid	4.75	0.187
jacket	black LSZH ⁽⁵⁾ PE	5.90	0.232

ELECTRICAL CHARACTERISTICS

characteristic impedance	50Ω ± 2Ω	
operating frequency range	DC - 4 GHz	
shielding effectiveness	90 dB (DC - 3 GHz)	
voltage withstanding	3 000 V rms	
peak power	3.3 kW	
capacitance	84 pF / m	25.5 pF / ft
velocity of propagation	79 % (4.2 ns / m)	

MECHANICAL CHARACTERISTICS

recommended minimum bending radius	25 mm	0.98 inch
weight	62 g / m	0.0417 lbs / ft

ENVIRONMENTAL CHARACTERISTICS

operating temperature range	-40 / +85 °C	-40 / +185 °F
fire resistance	yes (UL1581 Vw1 / IEC 332-1)	
halogen free	yes (IEC 754-2)	

FREQUENCY / ATTENUATION (typ.) / CW MAX POWER (sea level / 40 °C)

GHz	dB / m	dB / ft	Watts
0.2	0.12	0.04	391
0.4	0.17	0.05	277
0.6	0.21	0.06	226
0.8	0.25	0.08	196
1.0	0.28	0.08	175
1.5	0.35	0.10	143
2.0	0.40	0.12	124
2.5	0.45	0.14	111
3.0	0.50	0.15	101
4.0	0.59	0.18	88
attenuation calculation (dB/m)	(0.264 x √f GHz) + (0.015 x f GHz)		
power calculation (W)	175 / √f GHz		

⁽¹⁾ OFC = Oxygen Free Copper

⁽²⁾ PE = PolyEthylene


⁽³⁾ Al = Aluminum

⁽⁴⁾ TC = Tinned Copper

⁽⁵⁾ LSZH PE = Low Smoke Zero Halogen PolyEthylene

Note: typical attenuation for a couple of connectors (dB) = 0.045 x √f (GHz)

FLEXIBLE CABLE 6/75 S (RG59)



P/N: C291 360 000
(MIL-C-17/29-RG59) **S+**

APPLICATION NOTE

Due to its 75 ohms characteristic impedance, RG59 is rather dedicated to TV/Video application.

Its solid inner conductor allows better attenuation than the equivalent KX solution (KX6).

CONSTRUCTION / DIMENSIONS

	material	mm	inches
center conductor	solid CCS ⁽¹⁾	0.57	0.022
dielectric	solid PE ⁽²⁾	3.71	0.146
inner shield	copper braid	4.50	0.177
outer shield	-	-	-
jacket	black PVC ⁽³⁾	6.15	0.242

ELECTRICAL CHARACTERISTICS

characteristic impedance	75Ω ± 3Ω	
operating frequency range	DC - 1 GHz	
shielding effectiveness	40 dB	
voltage withstanding	7 000 V rms	
peak power	2.7 kW	
capacitance	60 pF / m	18.2 pF / ft
velocity of propagation	66 % (5 ns / m)	

MECHANICAL CHARACTERISTICS

recommended minimum bending radius	30 mm	1.18 inch
weight	47 g / m	0.0315 lbs / ft

ENVIRONMENTAL CHARACTERISTICS

operating temperature range	-40 / +85 °C	-40 / +185 °F
fire resistance	no	
halogen free	no	

FREQUENCY / ATTENUATION (typ.) / CW MAX POWER (sea level / 25 °C)


GHz	dB / m	dB / ft	Watts
0.05	0.09	0.03	335
0.1	0.13	0.04	237
0.2	0.19	0.06	168
0.3	0.23	0.07	137
0.5	0.30	0.09	106
0.6	0.33	0.10	97
0.7	0.36	0.11	90
0.8	0.39	0.12	84
1.0	0.44	0.13	75
attenuation calculation (dB/m)	(0.40 x √f GHz) + (0.04 x f GHz)		
power calculation (W)	75 / √f GHz		

⁽¹⁾ CCS = Copper Covered Steel

⁽²⁾ PE = PolyEthylene

⁽³⁾ PVC = PolyVinyl Chloride

FLEXIBLE CABLE 6/75 S (KX6A)



P/N: C291 351 012
(NF-C-93/550-KX6) **S+**

APPLICATION NOTE

Relevant standard: NF-C-93/550-KX6 (France)

Due to its stranded inner conductor, KX6 is much more flexible than RG59.

This cable will be chosen instead of RG59 for specific applications requiring high flexibility.

Cost effective solution

CONSTRUCTION / DIMENSIONS

	material	mm	inches
center conductor	stranded copper	0.60	0.024
dielectric	solid PE ⁽¹⁾	3.70	0.146
inner shield	copper braid	4.50	0.177
outer shield	-	-	-
jacket	green PVC ⁽²⁾	6.10	0.240

ELECTRICAL CHARACTERISTICS

characteristic impedance	75Ω ± 3Ω	
operating frequency range	DC - 1 GHz	
shielding effectiveness	40 dB	
voltage withstanding	7 000 V rms	
peak power	2.7 kW	
capacitance	63 pF / m	19 pF / ft
velocity of propagation	66 % (5 ns / m)	

MECHANICAL CHARACTERISTICS

recommended minimum bending radius	25 mm	0.98 inch
weight	48 g / m	0.0320 lbs / ft

ENVIRONMENTAL CHARACTERISTICS

operating temperature range	-40 / +85 °C	-40 / +185 °F
fire resistance	no	
halogen free	no	

FREQUENCY / ATTENUATION (typ.) / CW MAX POWER (sea level / 25 °C)

GHz	dB / m	dB / ft	Watts
0.05	0.10	0.03	300
0.1	0.14	0.04	212
0.2	0.20	0.06	150
0.3	0.25	0.08	122
0.5	0.33	0.10	95
0.6	0.36	0.11	86
0.7	0.40	0.12	80
0.8	0.43	0.13	75
1.0	0.48	0.15	67
attenuation calculation (dB/m)	(0.44 x √f GHz) + (0.04 x f GHz)		
power calculation (W)	67 / √f GHz		


⁽¹⁾ PE = PolyEthylene

⁽²⁾ PVC = PolyVinyl Chloride

S+: Service+ program = fast delivery

Note: typical attenuation for a couple of connectors (dB) = 0.045 x √f (GHz)

FLEXIBLE CABLE 6/75 D (HD 0.8/3.7 - RG59 type)



P/N: C291 360 093

APPLICATION NOTE

Due to its 75 ohms characteristic impedance, this cable is rather dedicated to HDTV/Video application.

CONSTRUCTION / DIMENSIONS

	material	mm	inches
center conductor	solid BC ⁽¹⁾	0.81	0.032
dielectric	FHD PE ⁽²⁾	3.68	0.145
inner shield	Al ⁽³⁾ tape	3.81	0.150
outer shield	TC ⁽⁴⁾ braid	4.37	0.172
jacket	blue PVC ⁽⁵⁾	5.92	0.233

ELECTRICAL CHARACTERISTICS

characteristic impedance	75Ω ± 1.5Ω	
operating frequency range	DC - 4.5 GHz	
shielding effectiveness	-	
voltage withstanding	300 V rms	
peak power	-	
capacitance	53.5 pF / m	16.3 pF / ft
velocity of propagation	83 % (4.0 ns / m)	

MECHANICAL CHARACTERISTICS

recommended minimum bending radius	63.5 mm	2.5 inch
weight	46 g / m	0.031 lbs / ft

ENVIRONMENTAL CHARACTERISTICS

operating temperature range	-30 / +75 °C	-22 / +167 °F
fire resistance	yes (UL1666 Vertical Shaft)	
halogen free	no	

FREQUENCY / ATTENUATION (typ.) / CW MAX POWER (sea level / 25 °C)

GHz	dB / m	dB / ft	Watts
0.5	0.173	0.052	-
1.0	0.247	0.075	-
1.5	0.304	0.092	-
2.0	0.353	0.107	-
2.5	0.397	0.120	-
3.0	0.437	0.132	-
3.5	0.473	0.143	-
4.0	0.508	0.154	-
4.5	0.541	0.164	-
attenuation calculation (dB/m)	(0.24 x √f GHz) + (0.007 x f GHz)		

⁽¹⁾ BC = Bare Copper

⁽²⁾ FHD PE = Foam High Density PolyEthylene

⁽³⁾ Al = Aluminum

⁽⁴⁾ TC = Tinned Copper

⁽⁵⁾ PVC = PolyVinyl Chloride

FLEXIBLE CABLE 7/75 D (HD 1.0/4.8 - RG6 type)



P/N: C291 384 083

APPLICATION NOTE

Due to its 75 ohms characteristic impedance, this cable is rather dedicated to HDTV/Video application.

CONSTRUCTION / DIMENSIONS

	material	mm	inches
center conductor	solid BC ⁽¹⁾	1.02	0.040
dielectric	FHD PE ⁽²⁾	4.56	0.180
inner shield	Al ⁽³⁾ tape	4.70	0.185
outer shield	TC ⁽⁴⁾ braid	5.26	0.207
jacket	blue PVC ⁽⁵⁾	6.95	0.274

ELECTRICAL CHARACTERISTICS

characteristic impedance	75Ω ± 1.5Ω	
operating frequency range	DC - 4.5 GHz	
shielding effectiveness	-	
voltage withstanding	300 V rms	
peak power	-	
capacitance	53.15 pF / m	16.2 pF / ft
velocity of propagation	82 % (4.1 ns / m)	

MECHANICAL CHARACTERISTICS

recommended minimum bending radius	69.85 mm	2.75 inch
weight	59.5 g / m	0.04 lbs / ft

ENVIRONMENTAL CHARACTERISTICS

operating temperature range	-30 / +75 °C	-22 / +167 °F
fire resistance	yes (UL1666 Vertical Shaft)	
halogen free	no	

FREQUENCY / ATTENUATION (typ.) / CW MAX POWER (sea level / 25 °C)

GHz	dB / m	dB / ft	Watts
0.5	0.134	0.040	-
1.0	0.193	0.058	-
1.5	0.240	0.073	-
2.0	0.281	0.085	-
2.5	0.318	0.096	-
3.0	0.352	0.107	-
3.5	0.384	0.116	-
4.0	0.414	0.125	-
4.5	0.443	0.134	-
attenuation calculation (dB/m)	(0.179 x √f GHz) + (0.014 x f GHz)		

⁽¹⁾ BC = Bare Copper

⁽²⁾ FHD PE = Foam High Density PolyEthylene


⁽³⁾ Al = Aluminum

⁽⁴⁾ TC = Tinned Copper

⁽⁵⁾ PVC = PolyVinyl Chloride

Note: typical attenuation for a couple of connectors (dB) = 0.045 x √f (GHz)

FLEXIBLE CABLE 10/50 S (RG213 - KX4)



P/N: C291 510 000

(MIL-C-17/74-RG213) S+

P/N: C291 510 010

(NF-C-93/550-KX4)

APPLICATION NOTE

Due to its construction and raw materials selection, RG213 is a cost effectiveness solution in the 10 mm cable range.

This cable may be considered for low frequencies applications that do not require a high level of screening effectiveness.

Cost effective solution

CONSTRUCTION / DIMENSIONS

	material	mm	inches
center conductor	stranded copper	2.26	0.089
dielectric	solid PE ⁽¹⁾	7.24	0.285
inner shield	copper braid	8.13	0.320
outer shield	-	-	-
jacket	black PVC ⁽²⁾	10.30	0.406

ELECTRICAL CHARACTERISTICS

characteristic impedance	50Ω ± 2Ω	
operating frequency range	DC - 1 GHz	
shielding effectiveness	40 dB	
voltage withstanding	10 000 V rms	
peak power	6.5 kW	
capacitance	96 pF / m	29 pF / ft
velocity of propagation	66 % (5 ns / m)	

MECHANICAL CHARACTERISTICS

recommended minimum bending radius	40 mm	1.57 inch
weight	148 g / m	0.0999 lbs / ft

ENVIRONMENTAL CHARACTERISTICS

operating temperature range	-40 / +85 °C	-40 / +185 °F
fire resistance	no	
halogen free	no	


FREQUENCY / ATTENUATION (typ.) / CW MAX POWER (sea level / 25 °C)

GHz	dB / m	dB / ft	Watts
0.05	0.05	0.01	805
0.1	0.07	0.02	569
0.2	0.10	0.03	402
0.3	0.12	0.04	329
0.5	0.16	0.05	255
0.6	0.18	0.05	232
0.7	0.20	0.06	215
0.8	0.21	0.06	201
1.0	0.24	0.07	180
attenuation calculation (dB/m)	(0.20 x √f GHz) + (0.04 x f GHz)		
power calculation (W)	180 / √f GHz		

⁽¹⁾ PE = PolyEthylene

⁽²⁾ PVC = PolyVinyl Chloride

FLEXIBLE CABLE 10/50 D (RG393)



P/N: C291 511 007

(MIL-C-17/174-RG393)

APPLICATION NOTE

RG393 is one of the most popular RG cables.

This cable may be used for high frequency range and severe thermal conditions applications.

CONSTRUCTION / DIMENSIONS

	material	mm	inches
center conductor	stranded SPC ⁽¹⁾	2.39	0.094
dielectric	solid PTFE ⁽²⁾	7.24	0.285
inner shield	SPC ⁽¹⁾ braid	-	-
outer shield	SPC ⁽¹⁾ braid	8.90	0.350
jacket	brown FEP ⁽³⁾	9.91	0.390

ELECTRICAL CHARACTERISTICS

characteristic impedance	50Ω ± 2Ω	
operating frequency range	DC - 11 GHz	
shielding effectiveness	65 dB (DC - 3 GHz)	
voltage withstanding	10 000 V rms	
peak power	8.3 kW	
capacitance	96 pF / m	29 pF / ft
velocity of propagation	70 % (4.8 ns / m)	

MECHANICAL CHARACTERISTICS

recommended minimum bending radius	40 mm	1.57 inch
weight	235 g / m	0.1567 lbs / ft

ENVIRONMENTAL CHARACTERISTICS

operating temperature range	-55 / +200 °C	-67 / +392 °F
fire resistance	yes (CSA FT6 / IEC 332-2)	
halogen free	no	

FREQUENCY / ATTENUATION (typ.) / CW MAX POWER (sea level / 25 °C)

GHz	dB / m	dB / ft	Watts
0.5	0.15	0.05	1 273
1.0	0.23	0.07	900
1.5	0.29	0.09	735
2.0	0.35	0.11	636
3.0	0.45	0.14	520
6.0	0.71	0.21	367
8.0	0.86	0.26	318
10.0	1.00	0.30	285
11.0	1.07	0.32	271
attenuation calculation (dB/m)	(0.19 x √f GHz) + (0.04 x f GHz)		
power calculation (W)	900 / √f GHz		

⁽¹⁾ SPC = Silver Plated Copper


⁽²⁾ PTFE = PolyTetraFluoroEthylene

⁽³⁾ FEP = Fluorinated Ethylene Propylene

S+: Service+ program = fast delivery

Note: typical attenuation for a couple of connectors (dB) = 0.045 x √f (GHz)

LOW LOSS FLEXIBLE CABLE 10/50 D (ECO393: alternative to RG393)



ECO-Friendly cable
Cost effective solution

P/N: C291 491 060 S+

APPLICATION NOTE

Designed by RADIALL, ECO393 is an advantageous alternative solution to RG393:

- **Advantageous in term of electrical performance:** its optimized construction allows better attenuation and screening effectiveness than RG393

- **Advantageous in term of environmental aspect:** halogen and sulphur free, this cable does not emit any toxic substance when submitted to fire.

The flame retardant jacket allows ECO393 to meet fire resistance standards.

- **Advantageous in term of price:** ECO393 design has integrated all RADIALL knowledge to reach the best performance with a very competitive price. ECO393 is UL style 1375 approved.

This cable is compatible with a large range of connector series.

CONSTRUCTION / DIMENSIONS

	material	mm	inches
center conductor	solid OFC ⁽¹⁾	2.40	0.094
dielectric	foam PE ⁽²⁾	7.25	0.285
inner shield	Al ⁽³⁾ foil	7.35	0.289
outer shield	TC ⁽⁴⁾ braid	7.85	0.309
jacket	black LSZH PE ⁽⁵⁾	9.10	0.358

ELECTRICAL CHARACTERISTICS

characteristic impedance	50Ω ± 2Ω	
operating frequency range	DC - 3 GHz	
shielding effectiveness	80 dB (DC - 3 GHz)	
voltage withstanding	10 000 V rms	
peak power	6.6 kW	
capacitance	88 pF / m	26.6 pF / ft
velocity of propagation	75 % (4.4 ns / m)	

MECHANICAL CHARACTERISTICS

recommended minimum bending radius	40 mm	1.57 inch
weight	130 g / m	0.0875 lbs / ft

ENVIRONMENTAL CHARACTERISTICS

operating temperature range	-40 / +85 °C	-40 / +185 °F
fire resistance	yes (UL1581 VW1 / IEC 332-1)	
halogen free	yes (IEC 754-2)	

FREQUENCY / ATTENUATION (typ.) / CW MAX POWER (sea level / 25 °C)

GHz	dB / m	dB / ft	Watts
0.1	0.05	0.01	1 265
0.2	0.07	0.02	894
0.3	0.08	0.03	730
0.5	0.11	0.03	566
1.0	0.16	0.05	400
1.5	0.20	0.06	327
2.0	0.24	0.07	283
2.5	0.27	0.08	253
3.0	0.30	0.09	231
attenuation calculation (dB/m)	(0.14 x √f GHz) + (0.02 x f GHz)		
power calculation (W)	400 / √f GHz		

⁽¹⁾ OFC = Oxygen Free Copper


⁽²⁾ PE = PolyEthylene

⁽³⁾ Al = Aluminum

⁽⁴⁾ TC = Tinned Copper

⁽⁵⁾ LSZH PE = Low Smoke Zero Halogen PolyEthylene

LOW LOSS FLEXIBLE CABLE 10/50 D (ECO393X)



ECO-Friendly cable
Cost effective solution

P/N: C291 512 020

APPLICATION NOTE

Designed by RADIALL, ECO393X is an advantageous alternative solution to ECO393 when higher power level is required:

- **Advantageous in term of electrical performance:** the crosslink foam polyethylene used as dielectric material allows higher temperature level (thus power range) than ECO393.

- **Advantageous in term of environmental aspect:** halogen and sulphur free, this cable does not emit any toxic substance when submitted to fire. The flame retardant jacket allows ECO393X to meet fire resistance standards.

- **Advantageous in term of price:** ECO393X design has integrated all RADIALL knowledge to reach the best performances with a very competitive price. ECO393X is UL style 3651 approved.

This cable is compatible with a large range of standard connector series.

CONSTRUCTION / DIMENSIONS

	material	mm	inches
center conductor	stranded SPC ⁽¹⁾	2.35	0.093
dielectric	X foam PE ⁽²⁾	7.20	0.283
inner shield	SPC ⁽¹⁾ braid	7.89	0.311
outer shield	SPC ⁽¹⁾ braid	8.57	0.337
jacket	black LSZH PE ⁽³⁾	10.00	0.394

ELECTRICAL CHARACTERISTICS

characteristic impedance	50Ω ± 2Ω	
operating frequency range	DC - 6 GHz	
shielding effectiveness	78 dB (DC - 3 GHz)	
voltage withstanding	5 000 V rms	
capacitance	94 pF / m	28.1 pF / ft
velocity of propagation	71 % (4.7 ns / m)	

MECHANICAL CHARACTERISTICS

recommended minimum bending radius	50 mm	1.97 inch
weight	180 g / m	0.120 lbs / ft

ENVIRONMENTAL CHARACTERISTICS

operating temperature range	-40 / +105 °C	-40 / +221 °F
fire resistance	yes (UL1581 VW1)	
halogen free	yes (IEC 754-2)	

FREQUENCY / ATTENUATION (typ.) / CW MAX POWER (sea level / 25 °C)

GHz	dB / m	dB / ft	Watts
0.5	0.18	0.05	693
1.0	0.29	0.09	490
1.5	0.38	0.12	400
2.0	0.47	0.14	346
2.5	0.56	0.17	310
3.0	0.64	0.19	283
3.5	0.72	0.22	262
4.0	0.80	0.24	245
5.0	0.96	0.29	219
6.0	1.11	0.34	200
attenuation calculation (dB/m)	(0.17 x √f GHz) + (0.115 x f GHz)		
power calculation (W)	490 / √f GHz		

⁽¹⁾ SPC = Silver Plated Copper


⁽²⁾ X foam PE = Crosslink foam PolyEthylene

⁽³⁾ LSZH PE = Low Smoke Zero Halogen PolyEthylene

S+: Service+ program = fast delivery

Note: typical attenuation for a couple of connectors (dB) = 0.045 x √f (GHz)

LOW LOSS FLEXIBLE CABLE 10.3/50 D (LMR400 type)



P/N: C291 516 070

APPLICATION NOTE

This LMR400 type cable can be considered as an alternative to equivalent diameter corrugated cables.

The main advantage is greater flexibility and bendability allowing easy routing during the installation.

The foam dielectric provides excellent loss and low return loss levels.

The double screen construction (Aluminum foil + tinned copper braid) offers a high level of shielding as well as low leakage.

This cable will be advised for feeder and jumper assemblies in cellular networks as well as applications requiring easy routing.

CONSTRUCTION / DIMENSIONS

	material	mm	inches
center conductor	solid AICC ⁽¹⁾	2.74	0.108
dielectric	foam PE ⁽²⁾	7.24	0.285
inner shield	Al ⁽³⁾ foil	7.39	0.291
outer shield	TC ⁽⁴⁾ braid	8.13	0.320
jacket	black PE ⁽²⁾	10.29	0.405

ELECTRICAL CHARACTERISTICS

characteristic impedance	50Ω ± 2Ω	
cut-off frequency	16.2 GHz	
recommend. operat. freq. range	DC - 6 GHz	
shielding effectiveness	> 90 dB	
voltage withstanding	2 500 V DC	
peak power	16 kW	
capacitance	78.4 pF / m	23.9 pF / ft
velocity of propagation	85 % (3.9 ns / m)	

MECHANICAL CHARACTERISTICS

recommended minimum bending radius	25.4 mm	1.00 inch
weight	100 g / m	0.068 lbs / ft

ENVIRONMENTAL CHARACTERISTICS

operating temperature range	-40 / +85 °C	-40 / +185 °F
fire resistance	no	
halogen free	no	

FREQUENCY / ATTENUATION (typ.) / CW TYP POWER (sea level / 40 °C)

GHz	dB / m	dB / ft	Watts
0.1	0.04	0.01	1 810
0.5	0.09	0.03	790
1.0	0.14	0.04	540
1.5	0.17	0.05	440
2.0	0.20	0.06	370
2.5	0.22	0.07	335
3.0	0.25	0.07	300
4.0	0.29	0.09	250
5.0	0.33	0.10	220
6.0	0.37	0.11	200
attenuation calculation (dB/m)	(0.127 x √f GHz) + (0.009 x f GHz)		

⁽¹⁾ AICC = Aluminum Covered Copper

⁽²⁾ PE = PolyEthylene

⁽³⁾ Al = Aluminum

⁽⁴⁾ TC = Tinned Copper

FLEXIBLE CABLE 11/50 D (RG214 - KX13)



P/N: C291 600 000

(MIL-C-17/75-RG214) S+

P/N: C291 600 010

(NF-C-93/550-KX13)

APPLICATION NOTE

RG214 is one of the most popular RG cables.

For economical reasons and when thermal conditions allow it, this cable may be used instead of RG393.

CONSTRUCTION / DIMENSIONS

	material	mm	inches
center conductor	standed SPC ⁽¹⁾	2.25	0.089
dielectric	solid PE ⁽²⁾	7.24	0.285
inner shield	SPC ⁽¹⁾ braid	-	-
outer shield	SPC ⁽¹⁾ braid	8.89	0.350
jacket	black PVC ⁽³⁾	10.80	0.425

ELECTRICAL CHARACTERISTICS

characteristic impedance	50Ω ± 2Ω	
operating frequency range	DC - 11 GHz	
shielding effectiveness	65 dB (DC - 3 GHz)	
voltage withstanding	10 000 V rms	
peak power	6.5 kW	
capacitance	96 pF / m	29 pF / ft
velocity of propagation	66 % (5 ns / m)	

MECHANICAL CHARACTERISTICS

recommended minimum bending radius	40 mm	1.57 inch
weight	174 g / m	0.1170 lbs / ft

ENVIRONMENTAL CHARACTERISTICS

operating temperature range	-40 / +85 °C	-40 / +185 °F
fire resistance	no	
halogen free	no	

FREQUENCY / ATTENUATION (typ.) / CW MAX POWER (sea level / 25 °C)

GHz	dB / m	dB / ft	Watts
0.5	0.16	0.05	255
1.0	0.24	0.07	180
1.5	0.30	0.09	147
2.0	0.36	0.11	127
3.0	0.47	0.14	104
6.0	0.73	0.22	73
8.0	0.89	0.27	64
10.0	1.03	0.31	57
11.0	1.10	0.33	54
attenuation calculation (dB/m)	(0.20 x √f GHz) + (0.04 x f GHz)		
power calculation (W)	180 / √f GHz		

⁽¹⁾ SPC = Silver Plated Copper


⁽²⁾ PE = PolyEthylene

⁽³⁾ PVC = PolyVinyl Chloride

S+: Service+ program = fast delivery

Note: typical attenuation for a couple of connectors (dB) = 0.045 x √f (GHz)

FLEXIBLE CABLE 11/75 D (RG216)



P/N: C291 610 000
(MIL-C-17/77-RG216)

APPLICATION NOTE

Due to its 75 ohms characteristic impedance, RG 216 is rather dedicated to TV/Video application.

CONSTRUCTION / DIMENSIONS

	material	mm	inches
center conductor	stranded TC ⁽¹⁾	1.21	0.048
dielectric	solid PE ⁽²⁾	7.24	0.285
inner shield	copper braid	-	-
outer shield	copper braid	8.89	0.350
jacket	black PVC ⁽³⁾	10.80	0.425

ELECTRICAL CHARACTERISTICS

characteristic impedance	75Ω ± 3Ω	
operating frequency range	DC - 3 GHz	
shielding effectiveness	65 dB	
voltage withstanding	10 000 V rms	
peak power	5.3 kW	
capacitance	66 pF / m	20 pF / ft
velocity of propagation	66 % (5 ns / m)	

MECHANICAL CHARACTERISTICS

recommended minimum bending radius	50 mm	1.97 inch
weight	165 g / m	0.1104 lbs / ft

ENVIRONMENTAL CHARACTERISTICS


operating temperature range	-40 / +85 °C	-40 / +185 °F
fire resistance	no	
halogen free	no	

FREQUENCY / ATTENUATION (typ.) / CW MAX POWER (sea level / 25 °C)

GHz	dB / m	dB / ft	Watts
0.1	0.09	0.03	395
0.2	0.13	0.04	280
0.3	0.17	0.05	228
0.5	0.22	0.07	177
1.0	0.32	0.10	125
1.5	0.40	0.12	102
2.0	0.48	0.14	88
2.5	0.54	0.16	79
3.0	0.60	0.18	72
attenuation calculation (dB/m)	(0.28 x √f GHz) + (0.04 x f GHz)		
power calculation (w)	125 / √f GHz		

- ⁽¹⁾ TC = Tinned Copper
⁽²⁾ PE = PolyEthylene
⁽³⁾ PVC = PolyVinyl Chloride

LOW LOSS FLEXIBLE CABLE 15.2/50 D (LMR600 type)



P/N: C291 626 070

APPLICATION NOTE

This LMR600 cable can be considered as an alternative to equivalent diameter corrugated cables.

The main advantage is greater flexibility and bendability allowing easy routing during the installation.

The foam dielectric provides excellent loss and low return loss levels.

The double screen construction (Aluminum foil + tinned copper braid) offers a high level of shielding as well as low leakage.

This cable will be advised for feeder and jumper assemblies in cellular networks as well as applications requiring easy routing.

CONSTRUCTION / DIMENSIONS

	material	mm	inches
center conductor	solid AICC ⁽¹⁾	4.47	0.176
dielectric	foam PE ⁽²⁾	11.56	0.455
inner shield	Al ⁽³⁾ foil	11.71	0.461
outer shield	TC ⁽⁴⁾ braid	12.45	0.490
jacket	black PE ⁽²⁾	14.99	0.590

ELECTRICAL CHARACTERISTICS

characteristic impedance	50Ω ± 2Ω	
cut-off frequency	10.3 GHz	
recommend. operat. freq. range	DC - 6 GHz	
shielding effectiveness	> 90 dB	
voltage withstanding	4 000 V DC	
peak power	40 kW	
capacitance	76.6 pF / m	23.4 pF / ft
velocity of propagation	87 % (3.8 ns / m)	

MECHANICAL CHARACTERISTICS

recommended minimum bending radius	38.1 mm	1.50 inch
weight	200 g / m	0.131 lbs / ft

ENVIRONMENTAL CHARACTERISTICS

operating temperature range	-40 / +85 °C	-40 / +185 °F
fire resistance	no	
halogen free	no	


FREQUENCY / ATTENUATION (typ.) / CW TYP POWER (sea level / 40 °C)

GHz	dB / m	dB / ft	Watts
0.1	0.03	0.008	2 970
0.5	0.06	0.018	1 270
1.0	0.09	0.026	870
1.5	0.11	0.033	700
2.0	0.13	0.039	590
2.5	0.15	0.044	530
3.0	0.16	0.049	470
4.0	0.19	0.058	400
5.0	0.22	0.066	350
6.0	0.25	0.074	310
attenuation calculation (dB/m)	(0.078 x √f GHz) + (0.009 x f GHz)		

- ⁽¹⁾ AICC = Aluminum Covered Copper
⁽²⁾ PE = PolyEthylene
⁽³⁾ Al = Aluminum
⁽⁴⁾ TC = Tinned Copper

Note: typical attenuation for a couple of connectors (dB) = 0.045 x √f (GHz)

CORRUGATED CABLE 1/4" (Cellflex 1/4" Spiral)



P/N: C291 993 170
(Cellflex HCF 1/4" - 50 AlCu)

APPLICATION NOTE

The outer conductor of this cable is constituted of a corrugated tube (spiral winding).

This construction allows perfect shielding and bendability while respecting large bending radius.

The foam dielectric provides excellent loss and low return loss levels.

This cable will be advised for feeder and jumper assemblies in cellular networks as well as applications requiring high performance level on long distances.

The anti-UV LSZH (Low Smoke Zero Hallogen) material is also flame retardant and allows this cable to be used for indoor public areas as well as outdoor installations.

CONSTRUCTION / DIMENSIONS

	material	mm	inches
center conductor	solid AlCC ⁽¹⁾	1.90	0.075
dielectric	foam PE ⁽²⁾	4.30	0.169
corrugated inner shield	spiral copper tube	6.50	0.256
outer shield	-	-	-
jacket	black LSZH PE ⁽³⁾	7.80	0.307

ELECTRICAL CHARACTERISTICS

characteristic impedance	50Ω ± 1Ω	
operating frequency range	DC - 20.4 GHz	
shielding effectiveness	110 dB	
voltage withstanding	3 100 V rms	
peak power	5.5 kW	
capacitance	82 pF / m	24.8 pF / ft
velocity of propagation	82 % (4.1 ns / m)	

MECHANICAL CHARACTERISTICS

recommended minimum bending radius	25.0 mm	0.984 inch
weight	70 g / m	0.047 lb / ft

ENVIRONMENTAL CHARACTERISTICS

operating temperature range	-40 / +85 °C	-40 / +185 °F
fire resistance	yes (UL 1581 VW1 / IEC 332-1)	
halogen free	yes (IEC 754-2)	

FREQUENCY / ATTENUATION (typ. / 25 °C) / CW MAX POWER (sea level / 40 °C)


GHz	dB / m	dB / ft	Watts
1.0	0.19	0.06	339
2.0	0.27	0.08	232
3.0	0.34	0.10	185
4.0	0.40	0.12	156
6.0	0.51	0.15	124
8.0	0.60	0.18	104
10.0	0.69	0.21	91
12.4	0.78	0.24	79
18.0	0.99	0.30	63
20.0	1.06	0.32	59
attenuation calculation (dB/m)	(0.17 x √f GHz) + (0.015 x f GHz)		

⁽¹⁾ AlCC = Aluminum Covered Copper

⁽²⁾ PE = PolyEthylene

⁽³⁾ LSZH PE = Low Smoke Zero Hallogen PolyEthylene

CORRUGATED CABLE 3/8" (Cellflex 3/8" Spiral)



P/N: C291 996 170
(Cellflex HCF 3/8" CuH-50 AlCu)

APPLICATION NOTE

The outer conductor of this cable is constituted of a corrugated tube (spiral winding).

This construction allows perfect shielding and bendability while respecting large bending radius.

The foam dielectric provides excellent loss and low return loss levels.

This cable will be advised for feeder and jumper assemblies in cellular networks as well as applications requiring high performance level on long distances.

The anti-UV LSZH (Low Smoke Zero Hallogen) material is also flame retardant and allows this cable to be used for indoor public areas as well as outdoor installations.

CONSTRUCTION / DIMENSIONS

	material	mm	inches
center conductor	solid AlCC ⁽¹⁾	2.60	0.102
dielectric	foam PE ⁽²⁾	6.30	0.248
corrugated inner shield	spiral copper tube	9.10	0.358
outer shield	-	-	-
jacket	black LSZH PE ⁽³⁾	10.20	0.402

ELECTRICAL CHARACTERISTICS

characteristic impedance	50Ω ± 1Ω	
operating frequency range	DC - 13.4 GHz	
shielding effectiveness	110 dB	
voltage withstanding	4 500 V rms	
peak power	11.9 kW	
capacitance	82 pF / m	24.8 pF / ft
velocity of propagation	82 % (4.1 ns / m)	

MECHANICAL CHARACTERISTICS

recommended minimum bending radius	25.0 mm	0.984 inch
weight	120 g / m	0.080 lbs / ft

ENVIRONMENTAL CHARACTERISTICS

operating temperature range	-40 / +85 °C	-40 / +185 °F
fire resistance	yes (UL 1581 VW1 / IEC 332-1)	
halogen free	yes (IEC 754-2)	

FREQUENCY / ATTENUATION (typ. / 25 °C) / CW MAX POWER (sea level / 40 °C)

GHz	dB / m	dB / ft	Watts
0.5	0.09	0.03	810
1.0	0.13	0.04	560
1.5	0.17	0.05	449
2.0	0.19	0.06	384
3.0	0.24	0.07	306
4.0	0.29	0.09	260
6.0	0.36	0.11	205
8.0	0.43	0.13	173
10.0	0.49	0.15	152
12.4	0.56	0.17	133
attenuation calculation (dB/m)	(0.123 x √f GHz) + (0.01 x f GHz)		


⁽¹⁾ AlCC = Aluminum Covered Copper

⁽²⁾ PE = PolyEthylene

⁽³⁾ LSZH PE = Low Smoke Zero Hallogen PolyEthylene

Note: typical attenuation for a couple of connectors (dB) = 0.045 x √f (GHz)

CORRUGATED CABLE 1/2" [Cellflex 1/2" Spiral]



P/N: C291 994 170

(Cellflex HCF 1/2" CuH-50 AlCu)

APPLICATION NOTE

The outer conductor of this cable is constituted of a corrugated tube (spiral winding).

This construction allows perfect shielding and bendability while respecting large bending radius.

The foam dielectric provides excellent loss and low return loss levels.

This cable will be advised for feeder and jumper assemblies in cellular networks as well as applications requiring high performance level on long distances.

The anti-UV LSZH (Low Smoke Zero Hallogen) material is also flame retardant and allows this cable to be used for indoor public areas as well as outdoor installations.

CONSTRUCTION / DIMENSIONS

	material	mm	inches
center conductor	solid AlCC ⁽¹⁾	3.60	0.142
dielectric	foam PE ⁽²⁾	8.30	0.327
corrugated inner shield	spiral copper tube	12.30	0.484
outer shield	-	-	-
jacket	black LSZH PE ⁽³⁾	13.50	0.531

ELECTRICAL CHARACTERISTICS

characteristic impedance	50Ω ± 1Ω	
operating frequency range	DC - 11.7 GHz	
shielding effectiveness	110 dB	
voltage withstanding	5 845 V rms	
peak power	20.5 kW	
capacitance	82 pF / m	24.8 pF / ft
velocity of propagation	82 % (4.1 ns / m)	

MECHANICAL CHARACTERISTICS

recommended minimum bending radius	32.0 mm	1.260 inch
weight	210 g / m	0.140 lbs / ft

ENVIRONMENTAL CHARACTERISTICS

operating temperature range	-40 / +85 °C	-40 / +185 °F
fire resistance	yes (UL 1581 Vw1 / IEC 332-1)	
halogen free	yes (IEC 754-2)	

FREQUENCY / ATTENUATION (typ. / 25 °C) / CW MAX POWER (sea level / 40 °C)

GHz	dB / m	dB / ft	Watts
0.5	0.08	0.02	1 120
1.0	0.11	0.03	770
1.5	0.14	0.04	616
2.0	0.16	0.05	525
2.5	0.18	0.06	461
3.0	0.20	0.06	417
4.0	0.24	0.07	353
6.0	0.30	0.09	278
8.0	0.36	0.11	234
10.0	0.42	0.13	204
attenuation calculation (dB/m)	(0.10 x √f GHz) + (0.01 x f GHz)		

⁽¹⁾ AlCC = Aluminum Covered Copper

⁽²⁾ PE = PolyEthylene

⁽³⁾ LSZH PE = Low Smoke Zero Hallogen PolyEthylene

SEMI-RIGID CABLE .047 [Copper]



P/N: C291 855 001

(MIL-C-17/151-00001)

APPLICATION NOTE

This is the smallest semi-rigid cable size proposed by RADIAL.

Its reduced size allows it to be easily handformable during integration operations.

CONSTRUCTION / DIMENSIONS

	material	mm	inches
center conductor	solid SPCCS ⁽¹⁾	0.29	0.011
dielectric	solid PTFE ⁽²⁾	0.94	0.037
inner shield	copper tubing	1.19	0.047
outer shield	-	-	-
jacket	-	-	-

ELECTRICAL CHARACTERISTICS

characteristic impedance	50Ω ± 2.5Ω	
operating frequency range	DC - 20 GHz	
shielding effectiveness	110 dB	
voltage withstanding	2 000 V rms	
peak power	1.1 kW	
capacitance	100 pF / m	30 pF / ft
velocity of propagation	70 % (4.8 ns / m)	

MECHANICAL CHARACTERISTICS

recommended minimum bending radius	3.17 mm	0.125 inch
weight	6.0 g / m	0.0040 lbs / ft

ENVIRONMENTAL CHARACTERISTICS

operating temperature range	-40 / +100 °C	-40 / +212 °F
fire resistance	not applicable	
halogen free	no	

FREQUENCY / ATTENUATION (typ.) / CW MAX POWER (sea level / 25 °C)

GHz	dB / m	dB / ft	Watts
1.0	1.14	0.35	30
2.0	1.64	0.50	21
3.0	2.03	0.61	17
6.0	2.93	0.89	12
8.0	3.43	1.04	11
10.0	3.88	1.18	9.5
12.4	4.37	1.32	8.5
18.0	5.39	1.63	7.1
20.0	5.72	1.73	6.7
attenuation calculation (dB/m)	(1.10 x √f GHz) + (0.04 x f GHz)		
power calculation (W)	30 / √f GHz		

⁽¹⁾ SPCCS = Silver Plated Copper Covered Steel

⁽²⁾ PTFE = PolyTetraFluoroEthylene

Note: typical attenuation for a couple of connectors (dB) = 0.045 x √f (GHz)

SEMI-RIGID CABLE .047 (Tinned copper)



P/N: C291 855 065
(MIL-C-17/151-00002 TYPE)

APPLICATION NOTE

This is the smallest semi-rigid cable size proposed by RADIAL. Its reduced size allows it to be easily handformable during integration operations. Due to the outer conductor coating (tin), this cable will be used instead of standard .047 copper for applications requiring high corrosion resistance and improved solderability.

CONSTRUCTION / DIMENSIONS

	material	mm	inches
center conductor	solid SPCCS ⁽¹⁾	0.29	0.011
dielectric	solid PTFE ⁽²⁾	0.94	0.037
inner shield	TC ⁽³⁾ tubing	1.19	0.047
outer shield	-	-	-
jacket	-	-	-

ELECTRICAL CHARACTERISTICS

characteristic impedance	50Ω ± 2.5Ω	
operating frequency range	DC - 20 GHz	
shielding effectiveness	110 dB	
voltage withstanding	2 000 V rms	
peak power	1.1 kW	
capacitance	100 pF / m	30 pF / ft
velocity of propagation	70 % (4.8 ns / m)	

MECHANICAL CHARACTERISTICS

recommended minimum bending radius	3.17 mm	0.125 inch
weight	6.0 g / m	0.0040 lbs / ft

ENVIRONMENTAL CHARACTERISTICS

operating temperature range	-40 / +100 °C	-40 / +121 °F
fire resistance	not applicable	
halogen free	no	

FREQUENCY / ATTENUATION (typ.) / CW MAX POWER (sea level / 25 °C)


GHz	dB / m	dB / ft	Watts
1.0	1.14	0.35	30
2.0	1.64	0.50	21
3.0	2.03	0.61	17
6.0	2.93	0.89	12
8.0	3.43	1.04	11
10.0	3.88	1.18	9.5
12.4	4.37	1.32	8.5
18.0	5.39	1.63	7.1
20.0	5.72	1.73	6.7
attenuation calculation (dB/m)	(1.10 x √f GHz) + (0.04 x f GHz)		
power calculation (W)	30 / √f GHz		

⁽¹⁾ SPCCS = Silver Plated Copper Covered Steel

⁽²⁾ PTFE = PolyTetraFluoroEthylene

⁽³⁾ TC = Tinned Copper

HAND-FORMABLE CABLE .085 (unjacketed)



P/N: C291 844 065

APPLICATION NOTE

This handformable cable is a good alternative to RG405 for applications requiring an easy routing on equipment.

Due to the outer conductor construction, this cable can be hand formed with exceptional ease with no spring back effect.

Cable can be reshaped, eliminating the need for costly drawings.

Attenuation is a little bit higher than the RG405's one but temperature range is wider.

CONSTRUCTION / DIMENSIONS

	material	mm	inches
center conductor	solid SPCCS ⁽¹⁾	0.51	0.020
dielectric	solid PTFE ⁽²⁾	1.63	0.064
inner shield	copper foil	-	-
outer shield	TS ⁽³⁾ braid	2.21	0.087
jacket	-	-	-

ELECTRICAL CHARACTERISTICS

characteristic impedance	50Ω ± 2Ω	
operating frequency range	DC - 20 GHz	
shielding effectiveness	90 dB	
voltage withstanding	5 000 V rms	
peak power	1.9 kW	
capacitance	97.5 pF / m	29.5 pF / ft
velocity of propagation	70 % (4.8 ns / m)	

MECHANICAL CHARACTERISTICS

recommended minimum bending radius	3.2 ⁽⁴⁾ / 9.5 ⁽⁵⁾ mm	0.125 ⁽⁴⁾ / 0.375 ⁽⁵⁾ inch
weight	17.8 g / m	0.0119 lbs / ft

ENVIRONMENTAL CHARACTERISTICS

operating temperature range	-65 / +150 °C	-85 / +302 °F
fire resistance	not applicable	
halogen free	no	

FREQUENCY / ATTENUATION (typ.) / CW MAX POWER (sea level / 25 °C)

GHz	dB / m	dB / ft	Watts
1.0	0.67	0.20	100
2.0	0.97	0.29	71
3.0	1.21	0.37	58
6.0	1.78	0.54	41
8.0	2.10	0.64	35
10.0	2.39	0.72	32
12.4	2.71	0.82	28
18.0	3.39	1.03	24
20.0	3.62	1.10	22
attenuation calculation (dB/m)	(0.63 x √f GHz) + (0.04 x f GHz)		
power calculation (W)	100 / √f GHz		

⁽¹⁾ SPCCS = Silver Plated Copper Covered Steel

⁽²⁾ PTFE = PolyTetraFluoroEthylene


⁽³⁾ TS = Tin Soaked

⁽⁴⁾ one time

⁽⁵⁾ repeated

Note: typical attenuation for a couple of connectors (dB) = 0.045 x √f (GHz)

SEMI-RIGID CABLE .085 (RG405 - KS1)



P/N: C291 850 001

(MIL-C-17/133-RG405)
(NF-C-93/551-KS1)

APPLICATION NOTE

RG405 is one of the most popular semi-rigid RG cables.
RG405 will be preferred to flexible RG316 or RD316 for applications requiring high frequency range, low attenuation, high screening effectiveness, very small bending radius and/or no spring back effect.

CONSTRUCTION / DIMENSIONS

	material	mm	inches
center conductor	solid SPCCS ⁽¹⁾	0.51	0.020
dielectric	solid PTFE ⁽²⁾	1.68	0.066
inner shield	copper tubing	2.20	0.087
outer shield	-	-	-
jacket	-	-	-

ELECTRICAL CHARACTERISTICS

characteristic impedance	50Ω ± 1.5Ω	
operating frequency range	DC - 20 GHz	
shielding effectiveness	110 dB	
voltage withstanding	5 000 V rms	
peak power	1.9 kW	
capacitance	100 pF / m	30 pF / ft
velocity of propagation	70 % (4.8 ns / m)	

MECHANICAL CHARACTERISTICS

recommended minimum bending radius	3.17 mm	0.125 inch
weight	20.0 g / m	0.0135 lbs / ft

ENVIRONMENTAL CHARACTERISTICS

operating temperature range	-40 / +125 °C	-40 / +257 °F
fire resistance	not applicable	
halogen free	no	


FREQUENCY / ATTENUATION (typ.) / CW MAX POWER (sea level / 25 °C)

GHz	dB / m	dB / ft	Watts
1.0	0.65	0.20	100
2.0	0.94	0.29	71
3.0	1.18	0.36	58
6.0	1.73	0.53	41
8.0	2.05	0.62	35
10.0	2.33	0.71	32
12.4	2.64	0.80	28
18.0	3.31	1.00	24
20.0	3.53	1.07	22
attenuation calculation (dB/m)	(0.61 x √f GHz) + (0.04 x f GHz)		
power calculation (W)	100 / √f GHz		

⁽¹⁾ SPCCS = Silver Plated Copper Covered Steel

⁽²⁾ PTFE = PolyTetraFluoroEthylene

SEMI-RIGID CABLE .085 (Tinned copper)



P/N: C291 850 005

(MIL-C-17/133-00007)

APPLICATION NOTE

Due to the outer conductor coating (tin), this cable will be used instead of RG405 for applications requiring high corrosion resistance and improved solderability.

CONSTRUCTION / DIMENSIONS

	material	mm	inches
center conductor	solid SPCCS ⁽¹⁾	0.51	0.020
dielectric	solid PTFE ⁽²⁾	1.68	0.066
inner shield	TPC ⁽³⁾	2.20	0.087
outer shield	-	-	-
jacket	-	-	-

ELECTRICAL CHARACTERISTICS

characteristic impedance	50Ω ± 1.5Ω	
operating frequency range	DC - 20 GHz	
shielding effectiveness	110 dB	
voltage withstanding	5 000 V DC	
peak power	1.9 kW	
capacitance	100 pF / m	30 pF / ft
velocity of propagation	70 % (4.8 ns / m)	

MECHANICAL CHARACTERISTICS

recommended minimum bending radius	3.17 mm	0.125 inch
weight	20.0 g / m	0.0135 lbs / ft

ENVIRONMENTAL CHARACTERISTICS

operating temperature range	-40 / +125 °C	-40 / +257 °F
fire resistance	not applicable	
halogen free	no	

FREQUENCY / ATTENUATION (typ.) / CW MAX POWER (sea level / 25 °C)

GHz	dB / m	dB / ft	Watts
1.0	0.65	0.20	100
2.0	0.94	0.29	71
3.0	1.18	0.36	58
6.0	1.73	0.53	41
8.0	2.05	0.62	35
10.0	2.33	0.71	32
12.4	2.64	0.80	28
18.0	3.31	1.00	24
20.0	3.53	1.07	22
attenuation calculation (dB/m)	(0.61 x √f GHz) + (0.04 x f GHz)		
power calculation (W)	100 / √f GHz		

⁽¹⁾ SPCCS = Silver Plated Copper Covered Steel

⁽²⁾ PTFE = PolyTetraFluoroEthylene

⁽³⁾ TPC = Tin Plated Copper

Note: typical attenuation for a couple of connectors (dB) = 0.045 x √f (GHz)

SEMI-RIGID CABLE .085 (Non magnetic)



P/N: C291 851 001
(MIL-C-17/133-00008)

APPLICATION NOTE

Based on RG405 standard, this cable is used where non magnetic aspect is required.

CONSTRUCTION / DIMENSIONS

	material	mm	inches
center conductor	solid SPC ⁽¹⁾	0.51	0.020
dielectric	solid PTFE ⁽²⁾	1.68	0.066
inner shield	copper tubing	2.20	0.087
outer shield	-	-	-
jacket	-	-	-

ELECTRICAL CHARACTERISTICS

characteristic impedance	50Ω ± 1.5Ω	
operating frequency range	DC - 20 GHz	
shielding effectiveness	110 dB	
voltage withstanding	5 000 V rms	
peak power	1.9 kW	
capacitance	100 pF / m	30 pF / ft
velocity of propagation	70 % (4.8 ns / m)	

MECHANICAL CHARACTERISTICS

recommended minimum bending radius	3.17 mm	0.125 inch
weight	20.0 g / m	0.0135 lbs / ft

ENVIRONMENTAL CHARACTERISTICS

operating temperature range	-40 / +125 °C	-40 / +257 °F
fire resistance	not applicable	
halogen free	no	

FREQUENCY / ATTENUATION (typ.) / CW MAX POWER (sea level / 25 °C)

GHz	dB / m	dB / ft	Watts
1.0	0.65	0.20	100
2.0	0.94	0.29	71
3.0	1.18	0.36	58
6.0	1.73	0.53	41
8.0	2.05	0.62	35
10.0	2.33	0.71	32
12.4	2.64	0.80	28
18.0	3.31	1.00	24
20.0	3.53	1.07	22
attenuation calculation (dB/m)	(0.61 x √f GHz) + (0.04 x f GHz)		
power calculation (W)	100 / √f GHz		

⁽¹⁾ SPC = Silver Plated Copper

⁽²⁾ PTFE = PolyTetraFluoroEthylene

SEMI-RIGID CABLE .085 (Aluminum)



P/N: C291 844 187
(MIL-C-17/133-00013)

APPLICATION NOTE

Based on RG405 standard, this cable will be selected for application requiring easy conformability and/or application requiring reduced weight.

Due to the aluminum outer conductor, this cable can be hand formed with exceptional ease with no spring back effect.

Cable can be reshaped, eliminating the need for costly drawings.

The outer conductor material (aluminum) slightly increases the attenuation compared to standard RG405.

CONSTRUCTION / DIMENSIONS

	material	mm	inches
center conductor	solid SPCCS ⁽¹⁾	0.51	0.020
dielectric	solid PTFE ⁽²⁾	1.68	0.066
inner shield	TPAI ⁽²⁾ tubing	2.20	0.087
outer shield	-	-	-
jacket	-	-	-

ELECTRICAL CHARACTERISTICS

characteristic impedance	50Ω ± 1Ω	
operating frequency range	DC - 20 GHz	
shielding effectiveness	110 dB	
voltage withstanding	5 000 V rms	
peak power	1.9 kW	
capacitance	100 pF / m	30 pF / ft
velocity of propagation	70 % (4.8 ns / m)	

MECHANICAL CHARACTERISTICS

recommended minimum bending radius	1.8 mm	0.07 inch
weight	10.7 g / m	0.0072 lbs / ft

ENVIRONMENTAL CHARACTERISTICS

operating temperature range	-40 / +125 °C	-40 / +257 °F
fire resistance	not applicable	
halogen free	no	

FREQUENCY / ATTENUATION (typ.) / CW MAX POWER (sea level / 25 °C)

GHz	dB / m	dB / ft	Watts
1.0	0.68	0.20	100
2.0	0.98	0.30	71
3.0	1.22	0.37	58
6.0	1.80	0.54	41
8.0	2.12	0.64	35
10.0	2.41	0.73	32
12.4	2.73	0.83	28
18.0	3.41	1.03	24
20.0	3.64	1.10	22
attenuation calculation (dB/m)	(0.635 x √f GHz) + (0.04 x f GHz)		
power calculation (W)	100 / √f GHz		


⁽¹⁾ SPCCS = Silver Plated Copper Covered Steel

⁽²⁾ PTFE = PolyTetraFluoroEthylene

⁽³⁾ TPAI = Tin Plated Aluminum

Note: typical attenuation for a couple of connectors (dB) = 0.045 x √f (GHz)

HAND-FORMABLE CABLE .141 (Unjacketed)



P/N: C291 864 065 S+

APPLICATION NOTE

This handformable cable is a good alternative to RG402 for applications requiring an easy routing on equipment.

Due to the outer conductor construction, this cable can be hand formed with exceptional ease with no spring back effect.

Cable can be reshaped, eliminating the need for costly drawings.

Attenuation is a little bit higher than the RG402's one but temperature range is wider.

CONSTRUCTION / DIMENSIONS

	material	mm	inches
center conductor	solid SPCCS ⁽¹⁾	0.92	0.036
dielectric	solid PTFE ⁽²⁾	2.95	0.116
inner shield	copper tape	-	-
outer shield	TS ⁽³⁾ braid	3.50	0.138
jacket	-	-	-

ELECTRICAL CHARACTERISTICS

characteristic impedance	50Ω ± 2Ω	
operating frequency range	DC - 20 GHz	
shielding effectiveness	90 dB	
voltage withstanding	5 000 V rms	
peak power	3.4 kW	
capacitance	97.5 pF / m	29.5 pF / ft
velocity of propagation	70 % (4.8 ns / m)	

MECHANICAL CHARACTERISTICS

recommended minimum bending radius	6.4 ⁽⁴⁾ / 19 ⁽⁵⁾ mm	0.25 ⁽⁴⁾ / 0.75 ⁽⁵⁾ inch
weight	33 g / m	0.0221 lbs / ft

ENVIRONMENTAL CHARACTERISTICS

operating temperature range	-65 / +150 °C	-85 / +302 °F
fire resistance	not applicable	
halogen free	no	

FREQUENCY / ATTENUATION (typ.) / CW MAX POWER (sea level / 25 °C)

GHz	dB / m	dB / ft	Watts
1.0	0.39	0.12	315
2.0	0.57	0.17	223
3.0	0.72	0.22	182
6.0	1.09	0.33	129
8.0	1.30	0.39	111
10.0	1.49	0.45	100
12.4	1.71	0.52	89
18.0	2.18	0.66	74
20.0	2.34	0.71	70
attenuation calculation (dB/m)	(0.345 x √f GHz) + (0.04 x f GHz)		
power calculation (W)	315 / √f GHz		

⁽¹⁾ SPCCS = Silver Plated Copper Covered Steel


⁽²⁾ PTFE = PolyTetraFluoroEthylene

⁽³⁾ TS = Tin Soaked

⁽⁴⁾ one time

⁽⁵⁾ repeated

HAND-FORMABLE CABLE .141 (Jacketed)



P/N: C291 866 378

APPLICATION NOTE

This jacketed cable will be used instead of standard unjacketed .141 for applications requiring electrical insulation and/or protection against environmental aggressions (chemical, humidity..).

The FEP jacket allows this cable to be used under severe thermal conditions.

The jacket makes the spring back effect slightly increasing.

CONSTRUCTION / DIMENSIONS

	material	mm	inches
center conductor	solid SPC ⁽¹⁾	0.92	0.036
dielectric	solid PTFE ⁽²⁾	2.98	0.117
inner shield	TS ⁽³⁾ braid	3.50	0.138
outer shield	-	-	-
jacket	black FEP ⁽⁴⁾	4.05	0.159

ELECTRICAL CHARACTERISTICS

characteristic impedance	50Ω ± 2Ω	
operating frequency range	DC - 20 GHz	
shielding effectiveness	90 dB	
voltage withstanding	5 000 V rms	
peak power	3.4 kW	
capacitance	97.5 pF / m	29.5 pF / ft
velocity of propagation	70 % (4.8 ns / m)	

MECHANICAL CHARACTERISTICS

recommended minimum bending radius	11 ⁽⁵⁾ / 33 ⁽⁶⁾ mm	0.43 ⁽⁵⁾ / 1.3 ⁽⁶⁾ inch
weight	38 g / m	0.0254 lbs / ft

ENVIRONMENTAL CHARACTERISTICS

operating temperature range	-65 / +150 °C	-85 / +302 °F
fire resistance	yes (CSA FT6 / IEC 332-2)	
halogen free	no	

FREQUENCY / ATTENUATION (typ.) / CW MAX POWER (sea level / 25 °C)

GHz	dB / m	dB / ft	Watts
1.0	0.43	0.13	315
2.0	0.63	0.19	223
3.0	0.80	0.24	182
6.0	1.20	0.36	129
8.0	1.42	0.43	111
10.0	1.63	0.49	100
12.4	1.87	0.57	89
18.0	2.37	0.72	74
20.0	2.54	0.77	70
attenuation calculation (dB/m)	(0.390 x √f GHz) + (0.04 x f GHz)		
power calculation (W)	315 / √f GHz		

⁽¹⁾ SPC = Silver Plated Copper

⁽²⁾ PTFE = PolyTetraFluoroEthylene

⁽³⁾ TS = Tin Soaked

⁽⁴⁾ FEP = Fluorinated Ethylene Propylene


⁽⁵⁾ one time

⁽⁶⁾ repeated

S+: Service+ program = fast delivery

Note: typical attenuation for a couple of connectors (dB) = 0.045 x √f (GHz)

SEMI-RIGID CABLE .141 (RG402 - KS2)



P/N: C291 860 001

(MIL-C-17/130-RG402)
(NF-C-93/551-KS2)

APPLICATION NOTE

RG402 is one of the most popular semi-rigid RG cables.

RG402 will be preferred to flexible RG142 for applications requiring high frequency range, low attenuation, high screening effectiveness, very small bending radius and/or no spring back effect.

CONSTRUCTION / DIMENSIONS

	material	mm	inches
center conductor	solid SPCCS ⁽¹⁾	0.92	0.036
dielectric	solid PTFE ⁽²⁾	2.98	0.117
inner shield	copper tubing	3.58	0.141
outer shield	-	-	-
jacket	-	-	-

ELECTRICAL CHARACTERISTICS

characteristic impedance	50Ω ± 1Ω	
operating frequency range	DC - 20 GHz	
shielding effectiveness	110 dB	
voltage withstanding	5 000 V rms	
peak power	3.4 kW	
capacitance	89 pF / m	27 pF / ft
velocity of propagation	70 % (4.8 ns / m)	

MECHANICAL CHARACTERISTICS

recommended minimum bending radius	6.35 mm	0.250 inch
weight	46 g / m	0.0309 lbs / ft

ENVIRONMENTAL CHARACTERISTICS

operating temperature range	-40 / +125 °C	-40 / +257 °F
fire resistance	not applicable	
halogen free	no	

FREQUENCY / ATTENUATION (typ.) / CW MAX POWER (sea level / 25 °C)

GHz	dB / m	dB / ft	Watts
1.0	0.34	0.10	315
2.0	0.50	0.15	223
3.0	0.64	0.19	182
6.0	0.97	0.30	129
8.0	1.17	0.35	111
10.0	1.35	0.41	100
12.4	1.55	0.47	89
18.0	1.99	0.60	74
20.0	2.14	0.65	70
attenuation calculation (dB/m)	(0.30 x √f GHz) + (0.04 x f GHz)		
power calculation (W)	315 / √f GHz		

⁽¹⁾ SPCCS = Silver Plated Copper Covered Steel

⁽²⁾ PTFE = PolyTetraFluoroEthylene

SEMI-RIGID CABLE .141 (Tinned copper)



P/N: C291 862 005

(MIL-C-17/130-00005)

APPLICATION NOTE

Due to the outer conductor coating (tin), this cable will be used instead of RG402 for applications requiring high corrosion resistance and improved solderability.

This cable is also an economical alternative solution to .141 silvered copper.

CONSTRUCTION / DIMENSIONS

	material	mm	inches
center conductor	solid SPCCS ⁽¹⁾	0.92	0.036
dielectric	solid PTFE ⁽²⁾	2.98	0.117
inner shield	TPC ⁽³⁾	3.58	0.141
outer shield	-	-	-
jacket	-	-	-

ELECTRICAL CHARACTERISTICS

characteristic impedance	50Ω ± 1Ω	
operating frequency range	DC - 20 GHz	
shielding effectiveness	110 dB	
voltage withstanding	5 000 V rms	
peak power	3.4 kW	
capacitance	89 pF / m	27 pF / ft
velocity of propagation	70 % (4.8 ns / m)	

MECHANICAL CHARACTERISTICS

recommended minimum bending radius	1.90 mm	0.075 inch
weight	46 g / m	0.0309 lbs / ft

ENVIRONMENTAL CHARACTERISTICS

operating temperature range	-40 / +125 °C	-40 / +257 °F
fire resistance	not applicable	
halogen free	no	

FREQUENCY / ATTENUATION (typ.) / CW MAX POWER (sea level / 25 °C)

GHz	dB / m	dB / ft	Watts
1.0	0.34	0.10	315
2.0	0.50	0.15	223
3.0	0.64	0.19	182
6.0	0.97	0.30	129
8.0	1.17	0.35	111
10.0	1.35	0.41	100
12.4	1.55	0.47	89
18.0	1.99	0.60	74
20.0	2.14	0.65	70
attenuation calculation (dB/m)	(0.30 x √f GHz) + (0.04 x f GHz)		
power calculation (W)	315 / √f GHz		


⁽¹⁾ SPCCS = Silver Plated Copper Covered Steel

⁽²⁾ PTFE = PolyTetraFluoroEthylene

⁽³⁾ TPC = Tin Plated Copper

Note: typical attenuation for a couple of connectors (dB) = 0.045 x √f (GHz)

SEMI-RIGID CABLE .141 (Silvered copper)



P/N: C291 861 066

APPLICATION NOTE

Based on RG402 standard, this cable is used where non magnetic aspect is required.

In addition, due to the outer conductor coating (silver), this cable will be used instead of RG402 for applications requiring high corrosion resistance and improved solderability.

CONSTRUCTION / DIMENSIONS

	material	mm	inches
center conductor	solid SPC ⁽¹⁾	0.92	0.036
dielectric	solid PTFE ⁽²⁾	2.98	0.117
inner shield	SPC ⁽¹⁾ tubing	3.58	0.141
outer shield	-	-	-
jacket	-	-	-

ELECTRICAL CHARACTERISTICS

characteristic impedance	50Ω ± 1Ω	
operating frequency range	DC - 20 GHz	
shielding effectiveness	110 dB	
voltage withstanding	5 000 V rms	
peak power	3.4 kW	
capacitance	89 pF / m	27 pF / ft
velocity of propagation	70 % (4.8 ns / m)	

MECHANICAL CHARACTERISTICS

recommended minimum bending radius	1.90 mm	0.075 inch
weight	46 g / m	0.0309 lbs / ft

ENVIRONMENTAL CHARACTERISTICS

operating temperature range	-40 / +125 °C	-40 / +257 °F
fire resistance	not applicable	
halogen free	no	


FREQUENCY / ATTENUATION (typ.) / CW MAX POWER (sea level / 25 °C)

GHz	dB / m	dB / ft	Watts
1.0	0.34	0.10	315
2.0	0.50	0.15	223
3.0	0.64	0.19	182
6.0	0.97	0.30	129
8.0	1.17	0.35	111
10.0	1.35	0.41	100
12.4	1.55	0.47	89
18.0	1.99	0.60	74
20.0	2.14	0.65	70
attenuation calculation (dB/m)	(0.30 x √f GHz) + (0.04 x f GHz)		
power calculation (W)	315 / √f GHz		

⁽¹⁾ SPC = Silver Plated Copper

⁽²⁾ PTFE = PolyTetraFluoroEthylene

SEMI-RIGID CABLE .141 (Non magnetic)



P/N: C291 861 061

APPLICATION NOTE

Based on RG402 standard, this cable is used where non magnetic aspect is required.

CONSTRUCTION / DIMENSIONS

	material	mm	inches
center conductor	solid SPC ⁽¹⁾	0.92	0.036
dielectric	solid PTFE ⁽²⁾	2.98	0.117
inner shield	copper tubing	3.58	0.141
outer shield	-	-	-
jacket	-	-	-

ELECTRICAL CHARACTERISTICS

characteristic impedance	50Ω ± 1Ω	
operating frequency range	DC - 20 GHz	
shielding effectiveness	110 dB	
voltage withstanding	5 000 V rms	
peak power	3.4 kW	
capacitance	89 pF / m	27 pF / ft
velocity of propagation	70 % (4.8 ns / m)	

MECHANICAL CHARACTERISTICS

recommended minimum bending radius	2.54 mm	0.100 inch
weight	46 g / m	0.0309 lbs / ft

ENVIRONMENTAL CHARACTERISTICS

operating temperature range	-40 / +125 °C	-40 / +257 °F
fire resistance	not applicable	
halogen free	no	

FREQUENCY / ATTENUATION (typ.) / CW MAX POWER (sea level / 25 °C)

GHz	dB / m	dB / ft	Watts
1.0	0.34	0.10	315
2.0	0.50	0.15	223
3.0	0.64	0.19	182
6.0	0.97	0.30	129
8.0	1.17	0.35	111
10.0	1.35	0.41	100
12.4	1.55	0.47	89
18.0	1.99	0.60	74
20.0	2.14	0.65	70
attenuation calculation (dB/m)	(0.30 x √f GHz) + (0.04 x f GHz)		
power calculation (W)	315 / √f GHz		

⁽¹⁾ SPC = Silver Plated Copper

⁽²⁾ PTFE = PolyTetraFluoroEthylene

Note: typical attenuation for a couple of connectors (dB) = 0.045 x √f (GHz)

SEMI-RIGID CABLE .141 (Aluminum)



P/N: C291 864 187
(MIL-C-17/130-00009)

APPLICATION NOTE

Based on RG402 standard, this cable will be selected for application requiring easy conformability and/or application requiring reduced weight.

Due to the aluminum outer conductor, this cable can be hand formed with exceptional ease with no spring back effect.

Cable can be reshaped, eliminating the need for costly drawings. The outer conductor material (aluminum) slightly increases the attenuation compared to standard RG402.

CONSTRUCTION / DIMENSIONS

	material	mm	inches
center conductor	solid SPCCS ⁽¹⁾	0.92	0.036
dielectric	solid PTFE ⁽²⁾	2.98	0.117
inner shield	TPAI ⁽³⁾	3.58	0.141
outer shield	-	-	-
jacket	-	-	-

ELECTRICAL CHARACTERISTICS

characteristic impedance	50Ω ± 1Ω	
operating frequency range	DC - 20 GHz	
shielding effectiveness	110 dB	
voltage withstanding	5 000 V rms	
peak power	3.4 kW	
capacitance	89 pF / m	27 pF / ft
velocity of propagation	70 % (4.8 ns / m)	

MECHANICAL CHARACTERISTICS

recommended minimum bending radius	3.17 mm	0.125 inch
weight	30 g / m	0.0185 lbs / ft

ENVIRONMENTAL CHARACTERISTICS

operating temperature range	-40 / +125 °C	-40 / +257 °F
fire resistance	not applicable	
halogen free	no	

FREQUENCY / ATTENUATION (typ.) / CW MAX POWER (sea level / 25 °C)


GHz	dB / m	dB / ft	Watts
1.0	0.36	0.11	315
2.0	0.53	0.16	223
3.0	0.67	0.20	182
6.0	1.02	0.31	129
8.0	1.23	0.37	111
10.0	1.41	0.43	100
12.4	1.62	0.49	89
18.0	2.08	0.63	74
20.0	2.23	0.68	70
attenuation calculation (dB/m)	(0.32 x √f GHz) + (0.04 x f GHz)		
power calculation (W)	315 / √f GHz		

⁽¹⁾ SPCCS = Silver Plated Copper Covered Steel

⁽²⁾ PTFE = PolyTetraFluoroEthylene

⁽³⁾ TPAI = Tin Plated Aluminum

SEMI-RIGID CABLE .250 (RG401 - KS3)



P/N: C291 870 001
(MIL-C-17/129-RG401)
(NF-C-93/551-KS3)

APPLICATION NOTE

RG401 will be used for application requiring very low attenuation, high power and high screening effectiveness.

Caution must be paid to the reduced operating temperature range.

CONSTRUCTION / DIMENSIONS

	material	mm	inches
center conductor	solid SPC ⁽¹⁾	1.63	0.064
dielectric	solid PTFE ⁽²⁾	5.31	0.209
inner shield	copper tubing	6.35	0.250
outer shield	-	-	-
jacket	-	-	-

ELECTRICAL CHARACTERISTICS

characteristic impedance	50Ω ± 0.5Ω	
operating frequency range	DC - 18 GHz	
shielding effectiveness	110 dB	
voltage withstanding	7 500 V rms	
peak power	6.1 kW	
capacitance	89 pF / m	27 pF / ft
velocity of propagation	70 % (4.8 ns / m)	

MECHANICAL CHARACTERISTICS

recommended minimum bending radius	9.53 mm	0.375 inch
weight	140 g / m	0.0945 lbs / ft

ENVIRONMENTAL CHARACTERISTICS

operating temperature range	-40 / +90 °C	-40 / +194 °F
fire resistance	not applicable	
halogen free	no	

FREQUENCY / ATTENUATION (typ.) / CW MAX POWER (sea level / 25 °C)

GHz	dB / m	dB / ft	Watts
1.0	0.21	0.06	900
2.0	0.31	0.09	636
3.0	0.41	0.12	520
6.0	0.64	0.20	367
8.0	0.79	0.24	318
10.0	0.92	0.28	285
12.4	1.08	0.33	256
18.0	1.42	0.43	212
20.0	1.54	0.47	201
attenuation calculation (dB/m)	(0.165 x √f GHz) + (0.04 x f GHz)		
power calculation (W)	900 / √f GHz		

⁽¹⁾ SPC = Silver Plated Copper

⁽²⁾ PTFE = PolyTetraFluoroEthylene

Note: typical attenuation for a couple of connectors (dB) = 0.045 x √f (GHz)

SEMI-RIGID CABLE .250 (Aluminum)



P/N: C291 874 187

APPLICATION NOTE

Based on RG401 standard, this cable will be selected for application requiring easy conformability and/or application requiring reduced weight.

Due to the aluminum outer conductor, this cable can be hand formed with exceptional ease with no spring back effect.

Cable can be reshaped, eliminating the need for costly drawings.

The outer conductor material (aluminum) slightly increases the attenuation compared to standard RG401.

CONSTRUCTION / DIMENSIONS

	material	mm	inches
center conductor	solid SPC ⁽¹⁾	1.63	0.064
dielectric	solid PTFE ⁽²⁾	5.31	0.209
inner shield	TPAI ⁽³⁾ tubing	6.35	0.250
outer shield	-	-	-
jacket	-	-	-

ELECTRICAL CHARACTERISTICS

characteristic impedance	50Ω ± 1Ω	
operating frequency range	DC - 18 GHz	
shielding effectiveness	110 dB	
voltage withstanding	7 500 V rms	
peak power	6.1 kW	
capacitance	89 pF / m	27 pF / ft
velocity of propagation	70 % (4.8 ns / m)	

MECHANICAL CHARACTERISTICS

recommended minimum bending radius	9.53 mm	0.375 inch
weight	79.5 g / m	0.0530 lbs / ft

ENVIRONMENTAL CHARACTERISTICS

operating temperature range	-40 / +100 °C	-40 / +212 °F
fire resistance	not applicable	
halogen free	no	

FREQUENCY / ATTENUATION (typ.) / CW MAX POWER (sea level / 25 °C)

GHz	dB / m	dB / ft	Watts
1.0	0.22	0.07	550
2.0	0.33	0.10	389
3.0	0.43	0.13	318
6.0	0.68	0.21	225
8.0	0.83	0.25	194
10.0	0.97	0.29	174
12.4	1.13	0.34	156
18.0	1.48	0.45	130
20.0	1.60	0.49	123
attenuation calculation (dB/m)	(0.18 x √f GHz) + (0.04 x f GHz)		
power calculation (w)	550 / √f GHz		







⁽¹⁾ SPC = Silver Plated Copper

⁽²⁾ PTFE = PolyTetraFluoroEthylene

⁽³⁾ TPAI = Tin Plated Aluminum

Note: typical attenuation for a couple of connectors (dB) = 0.045 x √f (GHz)

ULTRA LOW LOSS SHF CABLE RANGE

SHF2.4M DC - 40GHz		4.59 dB/m @ 40 GHz 139 dB/100ft	14 g/m 4.3 g/ft
SHF3M DC - 40GHz		3.11 dB/m @ 40 GHz (1.91 @ 18 GHz) 94 dB/100ft (58 @ 18 GHz)	35 g/m 10.6 g/ft
SHF4.2M DC - 30GHz		2.24 dB/m @ 30 GHz (1.63 @ 18 GHz) 68 dB/100ft (49 @ 18 GHz)	45 g/m 13.6 g/ft
SHF5M DC - 26.5GHz		1.27 dB/m @ 26.5 GHz (1.02 @ 18 GHz) 38 dB/100ft (31 @ 18 GHz)	60 g/m 18.2 g/ft
SHF8M DC - 18GHz		0.68 dB/m @ 18 GHz 21 dB/100ft	130 g/m 39.4g/ft
SHF13 DC - 9.5GHz		0.33 dB/m @ 9.5 GHz 10dB/100ft	280 g/m 84.8 g/ft





ALSO AVAILABLE WITH STRANDED INNER CONDUCTOR



More flexible

SHF3, SHF5 and SHF8

OTHER AVAILABLE VERSIONS

A/10 Armored cable		Crush resistant 1000N/10cm	SHF5MA/10 and SHF8MA/10
OD Outdoor cable		UV resistant	SHF5OD, SHF5MOD, SHF8OD and SHF8MOD
LW-2 Light weight cable		44 g/m for SHF5M (13.3 g/ft) 92 g/m for SHF8M (28.04 g/ft)	SHF5MLW-2 and SHF8MLW-2
AF-2 Air Frame cable		51 g/m for SHF5M (15.4 g/ft) 100 g/m for SHF8M (30.48 g/ft)	SHF5MAF-2 and SHF8MAF-2 Hermetically sealed @ 150°C 15 Km (50,000 ft) fluid resistant


ULTRA LOW LOSS SHF CABLE RANGE

Attenuation (dB/m)

GHz	SHF2.4M	SHF3M	SHF4.2M	SHF5M	SHF8M	SHF13
1.0	0.62	0.39	0.32	0.23	0.15	0.09
2.0	0.89	0.56	0.46	0.32	0.21	0.14
4.0	1.28	0.81	0.68	0.46	0.30	0.20
6.0	1.59	1.01	0.85	0.57	0.37	0.26
8.0	1.86	1.19	1.01	0.66	0.44	0.30
12.4	2.36	1.53	1.30	0.84	0.55	
18.0	2.91	1.91	1.63	1.02		
26.5	3.62	2.41	2.07	1.27		
40.0	4.59	3.11				

Attenuation (dB/100 ft)


GHz	SHF2.4M	SHF3M	SHF4.2M	SHF5M	SHF8M	SHF13
1.0	18.90	11.73	9.75	6.86	4.42	2.87
2.0	27.08	16.95	14.15	9.79	6.34	4.18
4.0	39.01	24.69	20.73	14.02	9.14	6.16
6.0	48.45	30.91	26.06	17.34	11.37	7.78
8.0	56.60	36.34	30.74	20.19	13.29	9.21
12.4	71.96	46.73	39.76	25.50	16.92	
18.0	88.56	58.17	49.77	31.19		
26.5	110.30	73.42	63.23	38.56		
40.0	140.05	94.75				

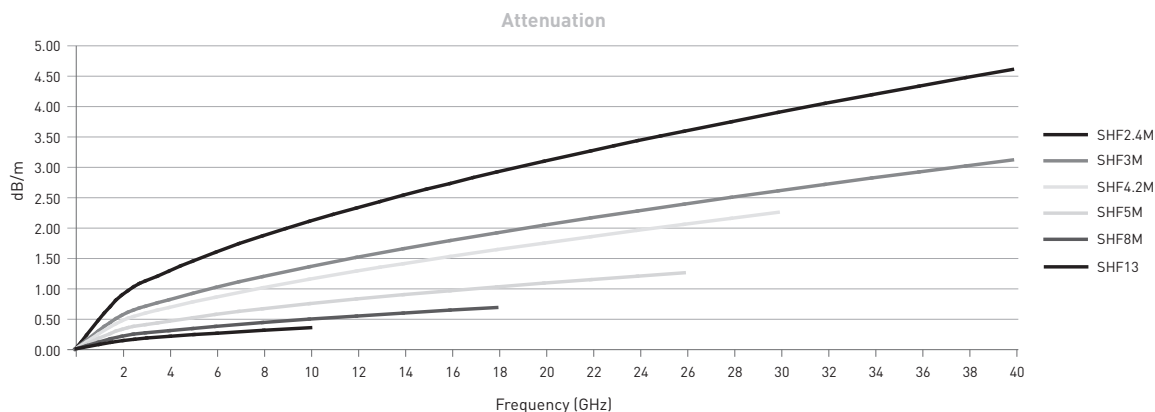


Power (W)

GHz	SHF2.4M	SHF3M	SHF4.2M	SHF5M	SHF8M	SHF13
1.0	260	400	630	850	1600	2500
2.0	180	280	450	600	1100	1800
4.0	130	200	310	420	800	1300
6.0	105	160	260	340	650	1000
8.0	90	140	220	300	560	900
12.4	75	120	180	240	450	
18.0	60	90	150	200	380	
26.5	50	80	140	190		
40.0	35	60				

(*) CW max power calculated at sea level / 40°C and V.S.W.R. 1:1

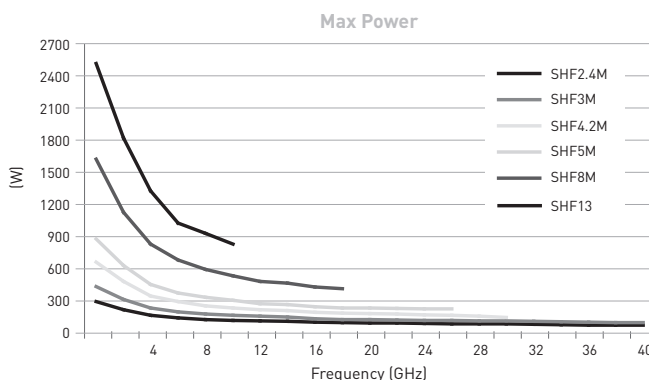

Phase change vs temperature

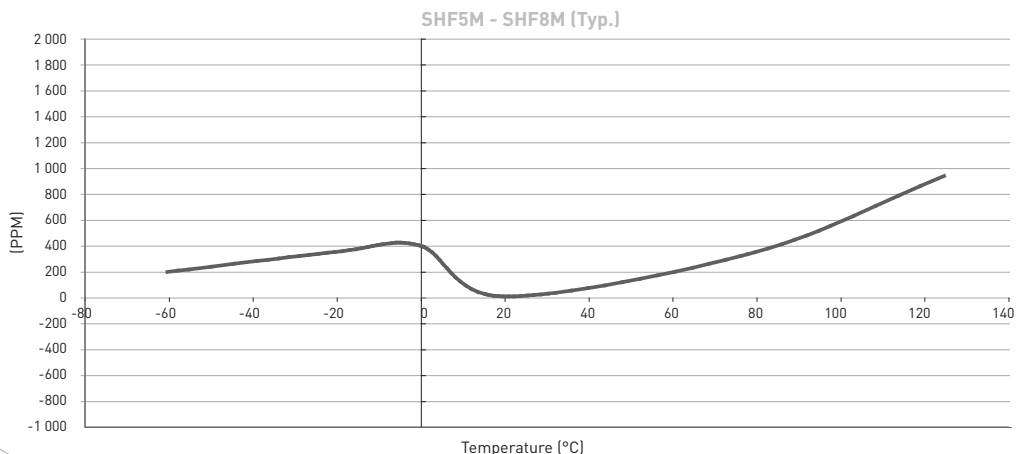



AEROSPACE



AUTOMOTIVE



DEFENSE



INDUSTRIAL



INSTRUMENTATION



MEDICAL



SPACE



TELECOM

EUROPE

France - RADIALL S.A.

101, Rue Ph. Hoffmann
93116 ROSNY sous BOIS (Paris)
Tel.: +33 1 49 35 35 35 - Fax: +33 1 48 54 63 63
E-Mail: info@radiall.com

Finland - RADIALL SF

P.O. Box 202 - 90101 OULU
Tel.: +358 407 522 412
E-Mail: infofi@radiall.com

Germany - RADIALL GmbH

Carl-Zeiss Str. 10 Postfach 200143
D63307 - RÖDERMARK (Frankfurt)
Tel.: +49 60 74 91 07 0 - Fax: +49 60 74 91 07 70
E-Mail: infode@radiall.com

Italy - RADIALL Elettronica S.R.L.

Via Concordia, 5 - 20090 ASSAGO MILANO
Tel.: +39 02 48 85 121 - Fax: +39 02 48 84 30 18
E-Mail: infoit@radiall.com
Regional office: Roma

Netherlands - RADIALL B.V.

Hogebrinkerweg 15b - 3871 KM HOEVELAKEN
Tel.: +31 33 253 40 09 - Fax: +31 33 253 45 12
E-Mail: infofl@radiall.com

Sweden - RADIALL A.B.

Sjöängsvägen 2 - SE-192 72 SOLLENTUNA (Stockholm)
Tel.: +46 844 434 10 - Fax: +46 875 449 16
E-Mail: infose@radiall.com

U.K. - RADIALL Ltd.

Ground Floor, 6 The Grand Union Office Park,
Packet Boat Lane
UXBRIDGE Middlesex UB8 2GH (London)
Tel.: +44 1895 425 000 - Fax: +44 1895 425 010
E-Mail: infouk@radiall.com

NORTH AMERICA

USA - RADIALL USA, Inc.

6825 West Galveston Street
CHANDLER, Arizona 85226
Tel.: +1 480 682 9400 - Fax: +1 480 682 9403
E-Mail: infousa@radiall.com

ALSO REPRESENTED IN

Australia	Hungary	Poland
Austria	Indonesia	Russia
Belgium	Israel	Singapore
Brazil	Korea	Spain
Czech Republic	Latvia	Switzerland
Denmark	Lithuania	Taiwan
Estonia	Malaysia	Thailand
Greece	Norway	Vietnam
	Philippines	South Africa

For the above countries, please contact the local agent or RADIALL at info@radiall.com

ASIA

China - SHANGHAI RADIALL Electronic Co., Ltd.

N° 390 Yong He Road 200072 - SHANGHAI
Tel.: +86 21 66 52 37 88 - Fax: +86 21 66 52 11 77
E-Mail: infoch@radiall.com

Japan - NIHON RADIALL

Shibuya-ku Ebisu 1-5-2, Kougetsu Bldg 405
TOKYO 150-0013
Tel.: +81 3 3440 6241 - Fax: +81 3 3440 6242
E-Mail: infojp@radiall.com

Hong Kong - RADIALL Electronics Ltd.

Flat D, 6/F, Ford Glory Plaza,
37-39 Wing Hong Street
Cheung Sha Wan
KOWLOON HONG KONG
Tel: +852-2959-3833 - Fax: +852-2959-2636
E-Mail: infohk@radiall.com

India - RADIALL India Pvt. Ltd.

25 D, II Phase, Peenya Industrial Area
BANGALORE 560058
Tel.: +91 80 83 95 271 - Fax: +91 80 83 97 228
E-Mail: infoin@radiall.com