

SUBMINIATURE SPnT up to 40 GHz

SMA – SMA 2.9 – QMA



Radiall's R591 coaxial subminiature switches have a typical operating life exceeding 25 million cycles. Providing excellent RF performance, repeatability, and a guaranteed life of 10 million cycles make these switches ideal for Automated Test Equipment (ATE) and other measurement applications. These subminiature switches are also an excellent choice for Mil/Aero applications due to their small size, light weight, and outstanding shock and vibration handling capabilities.

Example of P/N:

R591302420 is a SP4T SMA up to 6 GHz, Normally open, 12 Vdc with TTL driver and solder pins.

PART NUMBER SELECTION

R 591

RF Connectors:

- 3: SMA up to 6 GHz
- 7: SMA up to 26.5 GHz
- 8: SMA 2.9 up to 40 GHz (6)
- E: QMA up to 6 GHz (5)

Type:

- 0: Normally open
- 2: Latching, global reset
- 6: Latching, separated reset (1)

Actuator Voltage:

- 2: 12 Vdc
- 3: 28 Vdc

Actuator Terminals:

- 0: Solder pins
- 5: Micro-D connector

Options:

- 0: Without option
- 1: Positive common (1)
- 2: With TTL driver (2) (3) (4)
- 3: With suppression diodes
- 4: With suppression diodes and positive common

Number of positions:

- 4: 4 positions
- 6: 6 positions

(1): Available with "solder pins" models only

(2): Polarity is not relevant to application for switches with TTL driver

(3): Suppression diodes are already included with TTL option

(4): Available with "normally open" models only



(5): The QLF trademark (Quick Lock Formula®) standard applies to QMA and QN series and guarantees the full intermateability between suppliers using this trademark.

Using QLF certified connectors also guarantees the specified level of RF performances.

(6): Connector SMA2.9 is equivalent to "K connector®", registered trademark of Anritsu

SUBMINIATURE SPnT up to 40 GHz

SMA – SMA 2.9 – QMA

GENERAL SPECIFICATIONS

Operating mode		Normally open		Latching	
Nominal operating voltage (across operating temperature)	Vdc	12 (10.2 / 13)	28 (21 / 30)	12 (10.2 / 13)	28 (21 / 30)
Coil resistance (+/-10%)	Ω	48	250	60	285
Operating current at 23°C	mA	250	110	200	98
Average power		See RF Power Rating Chart page 1-13			
TTL input	High Level	2.2 to 5.5 Volts		800µA max 5.5 Volts	
	Low Level	0 to 0.8 Volts		20µA max 0.8 Volts	
Switching time (Max)	ms	10			
Life		10 million cycles (SMA, QMA) / 2 million cycles (SMA2.9)			
Connectors		SMA - QMA - SMA 2.9			
Actuator terminals		Solder Pins: double row connector for wrapping, soldering (250°C max / 30 sec), or connecting to 2.54 mm pitch female connector. 9 pin micro-D receptacle M83513/07-A according to MIL-C-85513.			
Operating temperature range		-40°C to +85°C			
Storage temperature range		-55°C to +85°C			
Sine vibration (According to MIL STD 202, Method 204D, Cond. D)		10-2000 Hz, 20g	operating		
Random vibration (According to MIL STD 202, Method 214A, Profile I, Cond. F)		50-2000 Hz, 20.71g	operating		
Shock (According to MIL STD 202, Method 213B, Cond. C)		100g / 6 ms, 1/2 sine	operating		

RF PERFORMANCES

Connectors	Frequency range GHz		V.S.W.R. (max)	Insertion loss (max) dB	Isolation (min) dB	Impedance Ω
QMA / SMA	DC - 6	DC - 3	1.20	0.20	80	50
		3 - 6	1.30	0.30	70	
SMA	DC - 26-5	DC - 3	1.20	0.20	80	
		3 - 8	1.30	0.30	70	
		8 - 12.4	1.40	0.40	60	
		12.4 - 18	1.50	0.50	60	
		18 - 26.5	1.60	0.60	55	
SMA 2.9	DC - 40	DC - 3	1.20	0.20	80	
		3 - 8	1.30	0.30	70	
		8 - 12.4	1.40	0.40	60	
		12.4 - 18	1.50	0.50	60	
		18 - 26.5	1.70	0.70	55	
		26.5 - 40	2.20	1.10	45	

See page 5-4 for typical RF performances


Our Most Important Connection is with You.™

SUBMINIATURE SPnT up to 40 GHz


SMA – SMA 2.9 – QMA

TYPICAL RF PERFORMANCES

Insertion Loss and Isolation

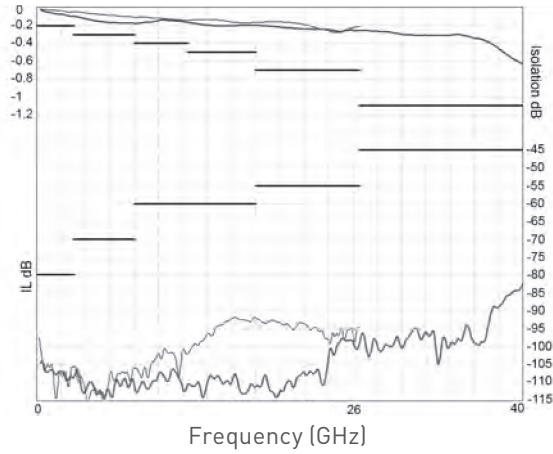


V.S.W.R.

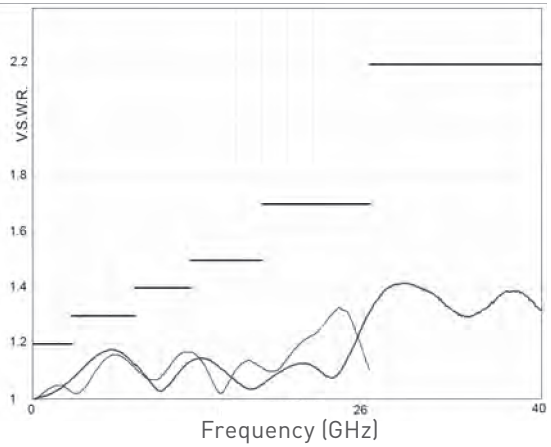


TYPICAL OUTLINE DRAWING (1)

Solder pin Model

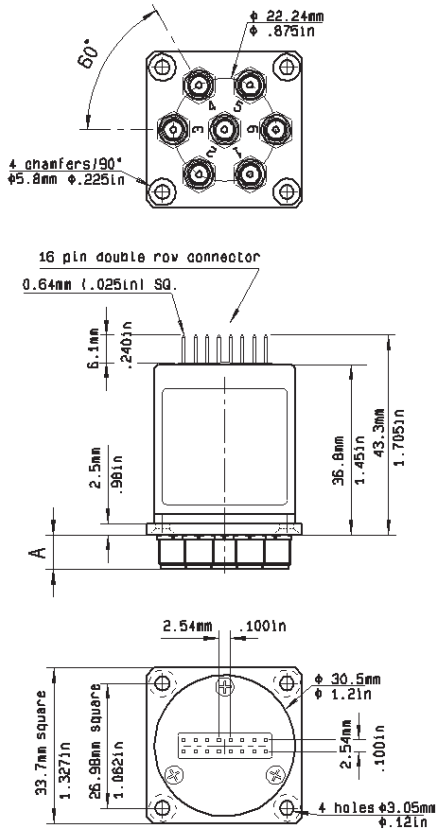

Micro-D Model

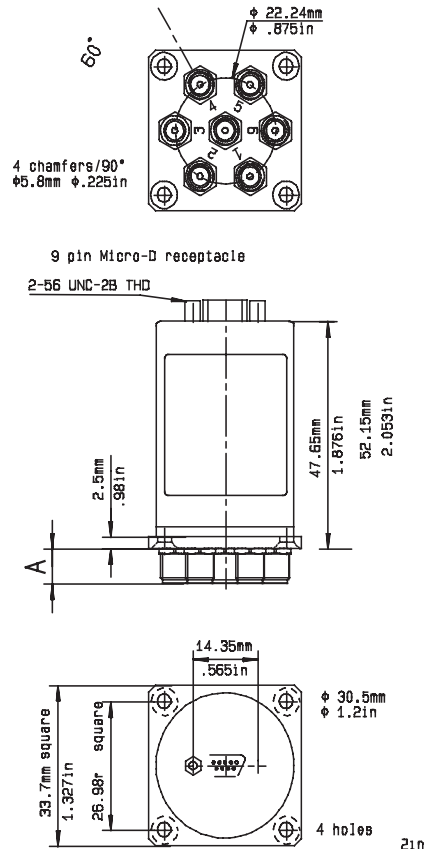

(1) : For SP4T, ways 3 and 6 not connected


All dimensions are in mm/inches

Connectors	SMA	SMA 2.9	QMA
A max (mm/in.)	7.4/0.291	6.3/0.248	10.8/0.425

SUBMINIATURE SPnT up to 40 GHz

SMA – SMA 2.9 – QMA


R591 SERIES ELECTRICAL SCHEMATICS

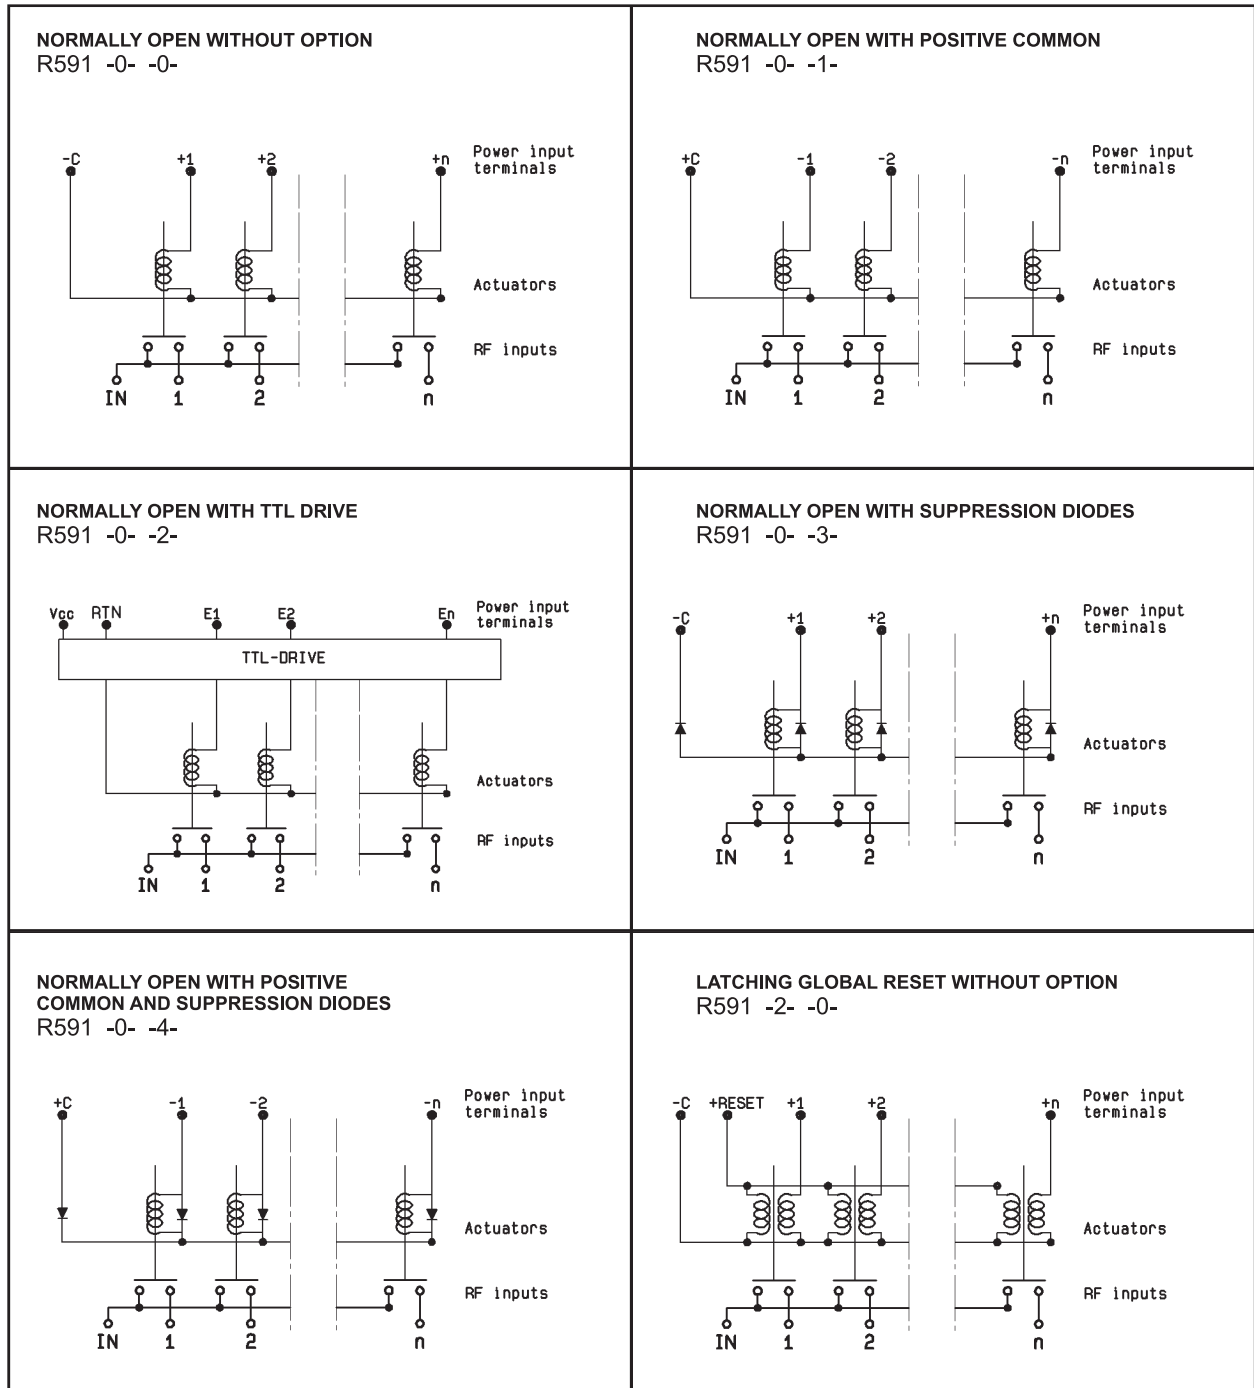

SUBMINIATURE SPnT up to 40 GHz

SMA – SMA 2.9 – QMA


R591 SERIES ELECTRICAL SCHEMATICS

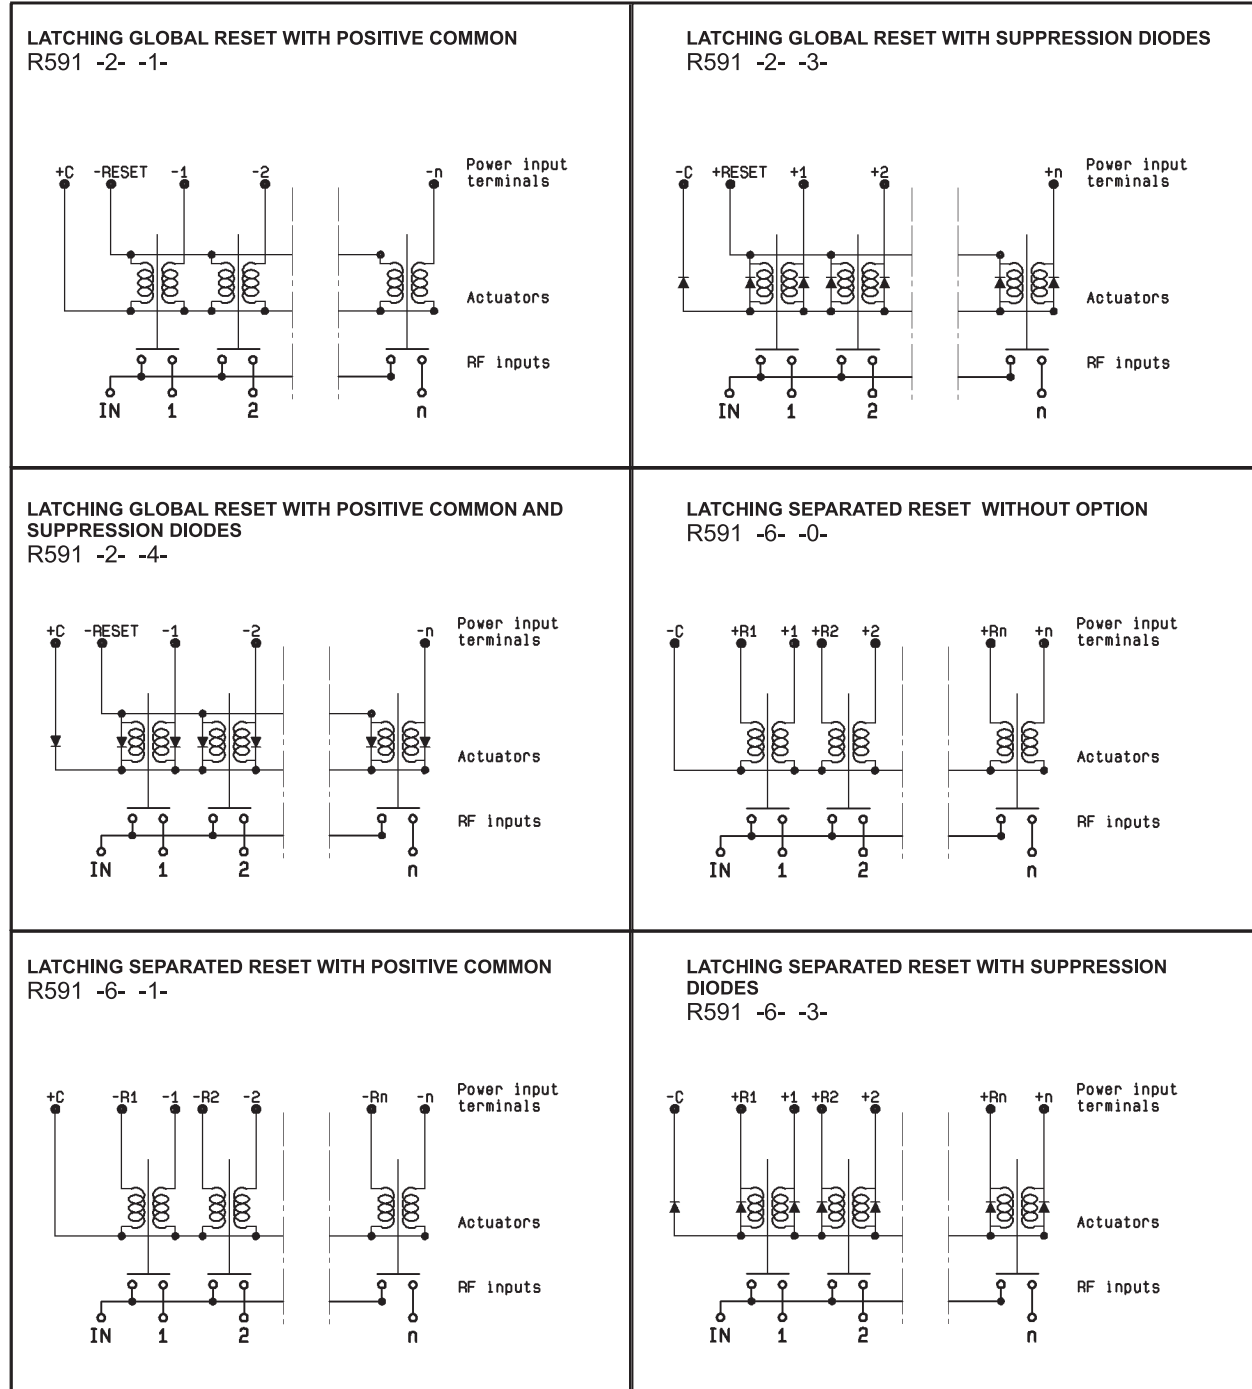

SUBMINIATURE SPnT up to 40 GHz


SMA – SMA 2.9 – QMA

R591 SERIES ELECTRICAL SCHEMATICS

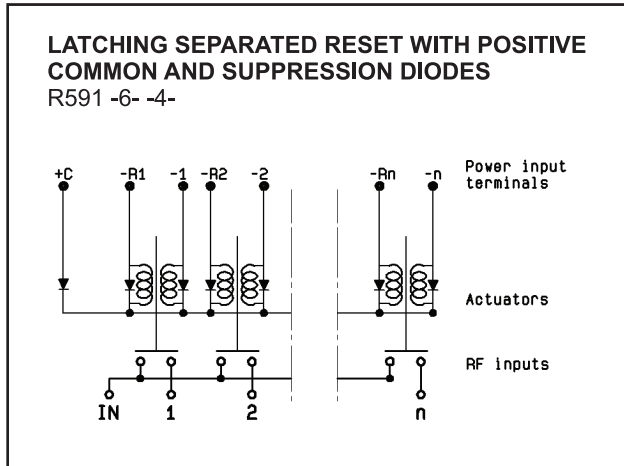


PIN IDENTIFICATION

Solder pins (top view)*

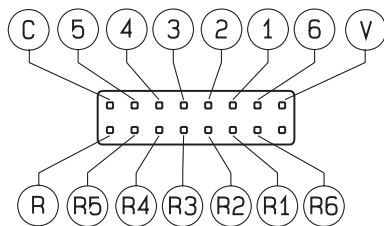

9 pin Micro-D (top view)



*Compatible with 2.54 mm pitch double row

16 contact female connector

NC: not connected

For SP4T, ways 3 and 6 not connected

Pin R = reset of all paths



Type		C	V	1	2	3	4	5	6	R	R1	R2	R3	R4	R5	R6
Normally open	Negative common	-C	NC	+1	+2	+3	+4	+5	+6	NC	NC	NC	NC	NC	NC	NC
	Positive common	+C	NC	-1	-2	-3	-4	-5	-6	NC	NC	NC	NC	NC	NC	NC
Latching global reset	Negative common	-C	NC	+1	+2	+3	+4	+5	+6	+reset	NC	NC	NC	NC	NC	NC
	Positive common	+C	NC	-1	-2	-3	-4	-5	-6	-reset	NC	NC	NC	NC	NC	NC
Latching individual reset*	Negative common	-C	NC	+1	+2	+3	+4	+5	+6	NC	+res.1	+res.2	+res.3	+res.4	+res.5	+res.6
	Positive common	+C	NC	-1	-2	-3	-4	-5	-6	NC	-res.1	-res.2	-res.3	-res.4	-res.5	-res.6
Normally open with TTL drive		RTN	VCC	E1	E2	E3	E4	E5	E6	NC	NC	NC	NC	NC	NC	NC

*Available with "solder pins" models only.