


Programmable DC Power Supplies

Tektronix PWS4000 Series Data Sheet

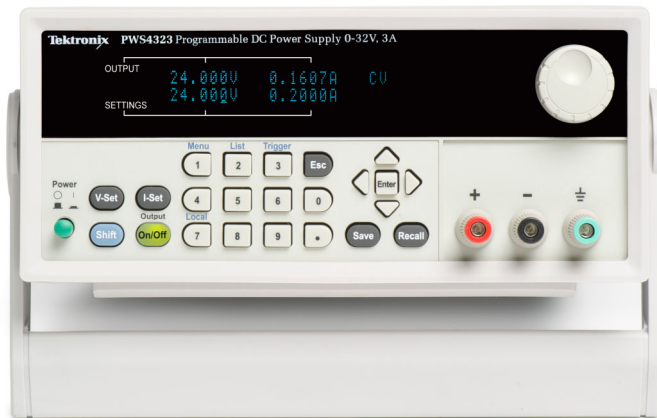

Features & Benefits

Key Performance Specifications

- Linear Regulation
- Up to 72 V Output Voltage
- 0.03% Basic Voltage Accuracy
- 0.05% Basic Current Accuracy
- Less than 5 mV_{p-p} Ripple and Noise

Available Functions and Features

- Output Voltage, Current, and Limits Displayed Simultaneously on a Bright Display
- Up to 40 User-defined Setup Memories
- Direct Parameter Entry using Numeric Keypad
- Adjustable Overvoltage Protection
- List Mode for Stepping through Stored Test Sequences
- Remote Sense to Compensate for Lead Resistance

Connectivity

- Rear Outputs and Trigger/Status Lines
- USB Device Port on Rear Panel for Quick PC Connectivity and Remote Programming
- Includes National Instrument's LabVIEW SignalExpress™ Tektronix Edition Software for Connecting Your Bench

3-year Warranty

Choose Your Voltage and Current – Quickly, Precisely

A wide current and voltage range, and flexible features, make the PWS4000 Power Supply Series a versatile addition to your bench. With 0.03% basic voltage accuracy and 0.05% basic current accuracy, you can be confident in the power supply's output value. Remote sense capability to eliminate the effect of voltage drop in your lead wires and noise of less than 5 mV_{p-p} further ensures accurate power delivery. List mode and a USB port for remote programming accelerate complex test development. The PWS4000 Power Supply Series generates the power you need for your application – quickly and precisely.

Total Control Over Your Output

All models of the PWS4000 Series include an overvoltage protection circuit that reduces the output voltage if it exceeds a user-specified threshold for any reason. The PWS4000 Series also allows you to prevent the voltage from being accidentally adjusted above a limit that you specify.

Setting an appropriate current limit can be critical for preventing damage to your device under test. With the PWS4000 numeric keypad, you can quickly and precisely specify a current limit before you start your test. The current limit is always visible on the display to keep you aware of this important setting. A user-definable password allows you to lock the front panel to prevent unwanted adjustments during critical tests.

Designed to Make Your Work Easier

The PWS4000 Power Supply Series is designed with the ease-of-use and familiar operation you expect from Tektronix.

Intuitive Operation

A rotary knob, with user-selectable step size, makes it easy to check circuit response to changing voltage or current. The direct-entry numeric keypad simplifies setting precise voltage and current values.

Bright Display

A bright vacuum fluorescent display provides excellent readability at a distance, at an angle, or under dim lighting conditions. Meter readings and limits are always visible. You don't need to push buttons just to see your limits.

Setup Memories

To save time when repeating tests, you can save your instrument settings in one of the 40 internal memory locations by simply pressing the Save button. Each time you want to recall that setting, just push the Recall button and choose the desired setup.

Accelerate Complex Test Development

The built-in List mode allows you to define a custom sequence of voltage and current steps for your test. You can define up to 7 lists, and each list can have up to 80 steps. Lists can be configured to step through the sequence based on external triggers or front-panel button presses. Alternatively, you can specify a duration for each step and the instrument will automatically step through the sequence. For even more flexibility, a USB device port on the back panel makes it easy to connect the power supply to your PC for remote programming.

Connect Your Bench for Intelligent Debug

You can use your preferred programming environment to control the PWS4000 using a USBTMC-compliant device port, or you can get quick results with the special Tektronix Edition of National Instrument's LabVIEW SignalExpress™ software. The PWS4000 Power Supply Series includes the Tektronix Edition of SignalExpress for basic instrument control, data logging, and analysis. The optional Professional Edition offers over 200 built-in functions that provide additional signal processing, advanced analysis, sweeping, limit testing, and user-defined step capabilities.

SignalExpress supports the range of Tektronix bench instruments*1, enabling you to connect your entire test bench. You can then access the feature-rich tools packed into each instrument from one intuitive software interface. This allows you to automate complex measurements requiring multiple instruments, and easily capture and analyze your results, all from your PC. Only Tektronix offers a connected test bench of intelligent instruments to simplify and speed debug of your complex design.

Performance You Can Count On

In addition to industry-leading service and support, the PWS4000 Power Supply Series comes backed with a three-year standard warranty.

*1 For a complete listing of Tektronix instruments supported by NI LabVIEW SignalExpress, visit www.tektronix.com/signalexpress.

Characteristics

Electrical

Specifications	PWS4205	PWS4305	PWS4323	PWS4602	PWS4721
DC Output Rating					
Voltage	0 to 20 V	0 to 30 V	0 to 32 V	0 to 60 V	0 to 72 V
Current	0 to 5 A	0 to 5 A	0 to 3 A	0 to 2.5 A	0 to 1.2 A
Maximum Power	100 W	150 W	96 W	150 W	86 W
Load Regulation					
Voltage			<0.01% + 2 mV		
Current	<0.05% + 0.1 mA	<0.05% + 1.5 mA	<0.05% + 0.1 mA	<0.05% + 0.5 mA	<0.05% + 0.1 mA
Line Regulation					
Voltage	<0.01% + 1 mV	<0.01% + 1 mV	<0.01% + 1 mV	<0.01% + 2 mV	<0.01% + 1 mV
Current	<0.05% + 0.1 mA	<0.05% + 0.1 mA	<0.05% + 0.1 mA	<0.05% + 0.05 mA	<0.05% + 0.1 mA
Ripple and Noise (20 Hz to 7 MHz)					
Voltage	<1 mV _{RMS} <3 mV _{P-P}	<1 mV _{RMS} <4 mV _{P-P}	<1 mV _{RMS} <4 mV _{P-P}	<1 mV _{RMS} <5 mV _{P-P}	<1 mV _{RMS} <3 mV _{P-P}
Current	<3 mA _{RMS}	<4 mA _{RMS}	<3 mA _{RMS}	<3 mA _{RMS}	<3 mA _{RMS}
Setting Resolution					
Voltage	1 mV	1 mV	1 mV	1 mV	2 mV
Current			0.1 mA		
Setting Accuracy (using remote sense, 25 °C ± 5 °C)					
Voltage	±0.03% + 3 mV	±0.03% + 3 mV	±0.03% + 3 mV	±0.03% + 6 mV	±0.03% + 6 mV
Current	±0.05% + 2 mA	±0.05% + 2.5 mA	±0.05% + 2 mA	±0.05% + 1.5 mA	±0.05% + 1 mA
Readback Resolution					
Voltage			1 mV		
Current			0.1 mA		
Readback Accuracy (25 °C ± 5 °C)					
Voltage	±0.02% + 3 mV	±0.02% + 2.5 mV	±0.02% + 3 mV	±0.02% + 6 mV	±0.02% + 5 mV
Current	±0.05% + 2 mA	±0.05% + 2.5 mA	±0.05% + 2 mA	±0.05% + 1.5 mA	±0.05% + 1 mA
Overvoltage Protection					
Range (typical)	1 V to 19 V	1 V to 29 V	1 V to 31 V	1 V to 59 V	1 V to 71 V
Accuracy			±0.5% + 0.5 V		
Response time (typical)			<10 ms		

Display

Vacuum fluorescent display.

Memory

40 setup memories.

List Mode

Up to 7 lists can be defined, each with up to 80 steps. Each step includes a voltage limit and a current limit. For continuous sequences each step also includes a duration.

Rear-panel Connections

Characteristic	Description
Communications	USB Device Port, Type B connector, USBTMC compatible GPIB, optional (requires TEK-USB-488 GPIB to USB adapter)
Output, Sense, Status, and Control	Removable screw terminal block carries the following signals:
Output channel	Duplicates the front-panel outputs
Remote sense lines	Connection for remote sense
Control input	Multifunction TTL input which can function as a trigger input, output control line, or digital input
Status output	Multifunction TTL output which can function as a fault indication, or digital output

Power Source

Characteristic	Description
110 V AC Setting	99 V _{RMS} to 132 V _{RMS}
220 V AC Setting	198 V _{RMS} to 264 V _{RMS}
Frequency	47 Hz to 63 Hz
Power Consumption	
PWS4205/4323/4721	250 VA
PWS4305/4602	350 VA

Physical Characteristics

Dimension	mm	in.
Height	88	3.47
Width	214	8.45
Depth	355	13.9
Weight	kg	lb.
PWS4205	9.0	19.8
PWS4305	9.6	21.2
PWS4323	9.0	19.8
PWS4602	9.6	21.2
PWS4721	9.0	19.8

Environmental and Safety

Characteristic	Description
Temperature	
Operating	0 °C to +40 °C
Storage	-20 °C to +70 °C
Relative Humidity (Noncondensing)	
Operating	5% to 95% relative humidity at up to +40 °C
Storage	5% to 95% relative humidity at up to +40 °C 5% to 60% RH above +40 °C up to +70 °C
Altitude	
Operating	Up to 2,000 m
Storage	Up to 4,000 m
Electromagnetic Compatibility	European Union: EN 55011, Class A; IEC 61000-3-2; IEC 61000-3-3, IEC 61000-4-2, IEC 61000-4-3, IEC 61000-4-4, IEC 61000-4-5, IEC 61000-4-6, IEC 61000-4-8, IEC 61000-4-11 USA: FCC, CFR Title 47, Part 15, Subpart B, Class A Australia: EMC Framework, demonstrated per Emission Standard AS/NZS 2064 (Industrial, Scientific, and Medical Equipment)
Safety	European Union: Low Voltage directive 2006/95/EC; EN61010-1 2001 USA: Nationally recognized testing laboratory listing UL61010-1-2004 Canada: CAN/CSA C22.2 No. 61010-1 2004

Warranty

Three years.

Ordering Information

Models

Model	Description
PWS4205	Programmable DC Power Supply, 20 V, 5 A
PWS4305	Programmable DC Power Supply, 30 V, 5 A
PWS4323	Programmable DC Power Supply, 32 V, 3 A
PWS4602	Programmable DC Power Supply, 60 V, 2 A
PWS4721	Programmable DC Power Supply, 72 V, 1.2 A

PWS4000 Includes: Power supply, line cord, Quick Start User Manual, Traceable Certificate of Calibration, documentation CD (includes user manuals, programmer's manual, and technical reference), and National Instruments LabVIEW SignalExpress Tektronix Edition CD.

Please specify power plug and preferred language option when ordering.

Instrument Options

Power Plug Options

Option	Description
A0	North America
A1	Universal Euro
A2	United Kingdom
A3	Australia
A5	Switzerland
A10	China
A11	India
A12	Brazil

Language Options

Option	Description
L0	English
L1	French
L2	Italian
L3	German
L4	Spanish
L6	Portuguese
L7	Simplified Chinese
L8	Traditional Chinese
L9	Korean
L10	Russian

Service Options

Option	Description
C3	Calibration Service 3 Years
C5	Calibration Service 5 Years
CA1	Provides a single calibration event, or coverage for the designated calibration interval, whichever comes first
D1	Calibration Data Report
D3	Calibration Data Report 3 Years (with Option C3)
D5	Calibration Data Report 5 Years (with Option C5)
R5	Repair Service 5 Years



Product(s) are manufactured in ISO registered facilities.

Contact Tektronix:

- ASEAN / Australasia (65) 6356 3900
- Austria 00800 2255 4835*
- Balkans, Israel, South Africa and other ISE Countries +41 52 675 3777
- Belgium 00800 2255 4835*
- Brazil +55 (11) 3759 7600
- Canada 1 800 833 9200
- Central East Europe, Ukraine, and the Baltics +41 52 675 3777
- Central Europe & Greece +41 52 675 3777
- Denmark +45 80 88 1401
- Finland +41 52 675 3777
- France 00800 2255 4835*
- Germany 00800 2255 4835*
- Hong Kong 400 820 5835
- India 000 800 650 1835
- Italy 00800 2255 4835*
- Japan 81 (3) 6714 3010
- Luxembourg +41 52 675 3777
- Mexico, Central/South America & Caribbean (52) 56 04 50 90
- Middle East, Asia, and North Africa +41 52 675 3777
- The Netherlands 00800 2255 4835*
- Norway 800 16098
- People's Republic of China 400 820 5835
- Poland +41 52 675 3777
- Portugal 80 08 12370
- Republic of Korea 001 800 8255 2835
- Russia & CIS +7 (495) 7484900
- South Africa +41 52 675 3777
- Spain 00800 2255 4835*
- Sweden 00800 2255 4835*
- Switzerland 00800 2255 4835*
- Taiwan 886 (2) 2722 9622
- United Kingdom & Ireland 00800 2255 4835*
- USA 1 800 833 9200

* European toll-free number. If not accessible, call: +41 52 675 3777

Updated 25 May 2010

For Further Information. Tektronix maintains a comprehensive, constantly expanding collection of application notes, technical briefs and other resources to help engineers working on the cutting edge of technology. Please visit www.tektronix.com



Copyright © Tektronix, Inc. All rights reserved. Tektronix products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specification and price change privileges reserved. TEKTRONIX and TEK are registered trademarks of Tektronix, Inc. All other trade names referenced are the service marks, trademarks, or registered trademarks of their respective companies.

15 Oct 2010

3GW-25253-0

www.tektronix.com



NUBICOM
(주)누비콤

서울 본사 서울특별시 영등포구 경인로 775(문래동 3가, 에이스하이테크시티 3동 201호)
TEL: 070-7872-0701 FAX: 02-2167-3801 E-mail: sales@nubicom.co.kr

대전 사무소 대전광역시 유성구 대덕대로 593(도룡동 386-2) 대덕테크비즈센터 203호
TEL: 070-7872-0712 FAX: 042-863-2023 E-mail: inyeom@nubicom.co.kr

(주)누비콤은 텍트로닉스의 공식 전국 담당 대리점입니다