


Tektronix PCI Express Logic Protocol Analyzer

TLA7SA00 Series Data Sheet

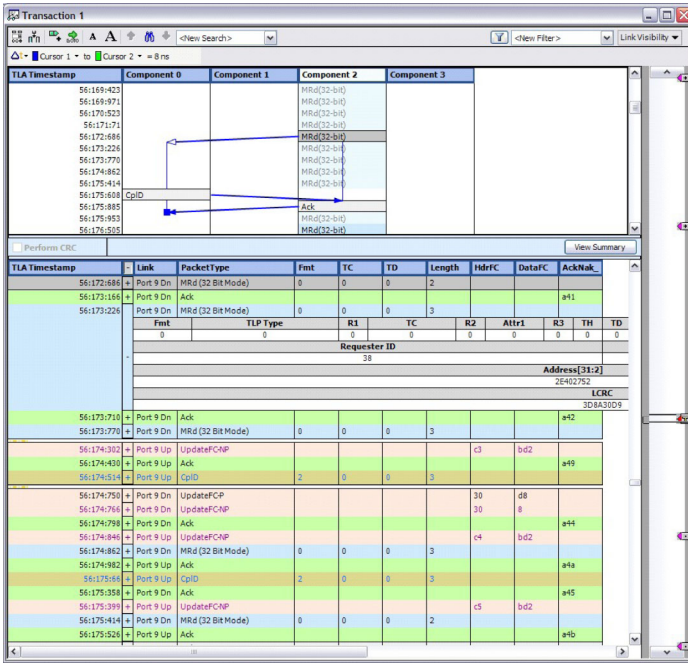


Features & Benefits

- PCI Express Gen1 through Gen3 including Gen3 Protocol to Physical Layer Analysis for Link Widths from x1 through x16 with up to 8.0 GT/s Acquisition Rates
- Comprehensive PCI Express Probing Solutions, including Midbus, Slot Interposer, and Solder-down Probes
 - Nonintrusive Probing that Utilizes OpenEYE Technology incorporating Automatic Tuning Equalization Circuitry to allow Probing Anywhere on the Channel and Ensure Accurate Data Capture in PCI Express Systems with Channel Lengths up to 24 in. and 2 Connectors
 - ScopePHY provides the ability to Quickly Connect Any of the PCI Express Midbus, Slot Interposer, or Solder-down Probes to a High-performance Oscilloscope providing a More Detailed Analog View of the PHY Layer
- Shorten Time to Gain Confidence in the Test System Setup
 - Front-panel LEDs provide Status Information such as Link Speed, Symbol Lock, and Link Activity
 - Auto-configure sets up the Logic Protocol Analyzer System to be Ready for Data Acquisition Quickly

- FastSYNC Tracks the Link as it Transitions In and Out of ASPM Power States such as L0s, Regardless of Electrical Idle Duration
- Real-time Statistics Help Observe Link Health and Behavior over Time
- Powerful Trigger-state Machine Spans All Layers of the Protocol
 - 8 States
 - 8 Packet Recognizers
 - 4 Symbol Sequence Recognizers
 - 4 Counter/Timers
 - 4 Event Flags
 - Conditional Storage
- Industry's Deepest 8 GB Memory/Module (16 GB memory, x16 link width) Increases the Chances of Capturing an Error and the Fault that Caused the Error
- HW Accelerated Search and Data Displays provide Immediate Visibility of Data Regardless of Record Length
- Information Density for Rapid Data Analysis
 - The Transaction Window provides Visibility into Protocol Behavior at the Packet and Transaction Level interspersed with Physical Layer Activity
 - The Summary Profile Window Helps Ascertain the Health of the System and Identify Patterns of Interest such as Errors, TLPs, DLLPs, Ordered Sets, etc.
- Multibus Visibility for System-level Debug
 - Analyze Complete System Interactions with Time-correlated, Multibus Analysis on a Single Display in a Single Mainframe. For example, Tracing Memory Access from PCI Express to DDR Memory
 - Cross Triggering and a Common Global Time Stamp enables Accurate and Efficient Debugging by Showing Exactly What Was Happening on One Bus Relative to Another at Any Given Instant in Time

Applications

- PCI Express Debug from Protocol Layer to Physical Layer
 - Silicon Validation
 - Computer System Validation
 - Embedded System Debug and Validation
- Processor/Bus Debug and Verification
- Embedded Software Integration, Debug, and Verification

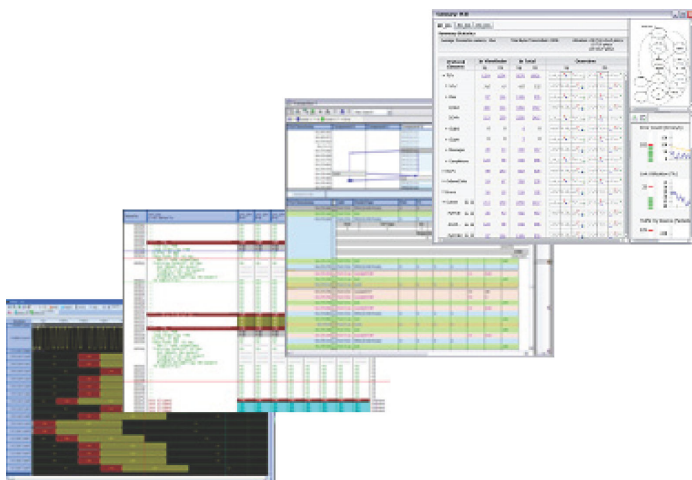

The TLA7SA00 Series modules provide PCI Express validation that spans from the physical layer to the transaction layer.


Breakthrough Solutions Spanning Physical-to Transaction-layer Debug and Analysis of PCI Express Systems

Tektronix provides breakthrough PCI Express systems analysis tools that enable digital hardware and software designers to capture and analyze the source of elusive problems that threaten product development schedules. The TLA7SA00 Series logic protocol analyzer modules provide the speed you need to capture the source of those elusive problems, plus the visibility you want with large displays and fast system data throughput, while protecting your investment with compatibility with all other TLA modules for cross bus-timing correlation.

TLA7SA00 Series Logic Protocol Analyzer Modules for PCI Express

PCI Express 3.0 introduces new challenges for validation engineers. Time-to-market pressures require a solution that can quickly pinpoint problems. The TLA7SA00 Series logic protocol analyzer modules provide an innovative approach to PCI Express validation that spans all layers of the protocol from the physical layer to the transaction layer.

Reduce the time to information by viewing and searching up to 16 GB deep memory in just seconds with rapid display updates enabled by our industry-leading hardware acceleration. Features such as auto-training, auto-tracking, front-panel LED lane status, etc. allow the logic protocol analyzer to "wire" itself automatically which shortens the time it takes for users to build confidence in the test system. Further, elusive power state anomalies pertaining to entry into and exit from electrical idle and ASPM states such as L0s to L0 are easily addressed by FastSYNC technology to ensure quick re-synchronization of the logic protocol analyzer with the PCI Express FTS ordered sets regardless of the duration of Electrical Idle time. This capability is unique compared to other solutions where the L0s to L0

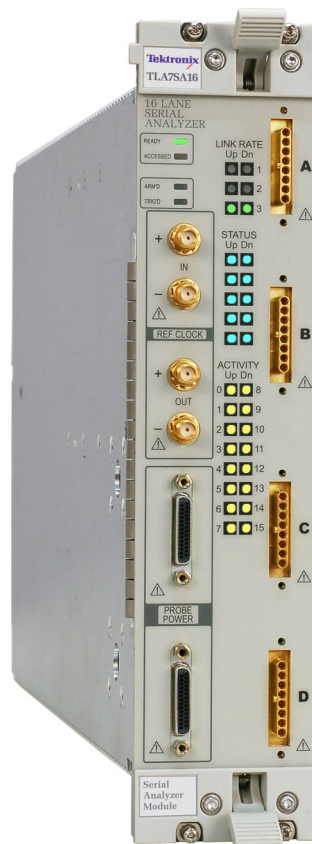


TLA7SA16 Module.


re-synchronization time is specified only over a short Electrical Idle time of 2 μ s or less.

With improved information density you can then quickly ascertain the health of the system and identify patterns of interest (errors, specific transactions, ordered sets, etc.) with statistics using the Summary Profile window. Protocol behavior can be viewed at the packet and transaction level interspersed with physical layer activity in a single innovative Transaction window. Further insight into physical layer details can be gained with the unique Listing window showing packet details at the symbol level by lane and you can view individual lane activity correlated with analog waveforms from your high-bandwidth oscilloscope in the Waveform window.

Hardware developers, hardware/software integrators, and embedded system designers will appreciate the tight integration with the Tektronix Logic Analyzer. This provides visibility of complete system interactions with time-correlated, multibus analysis on a single display. Cross triggering and a common global time stamp enables accurate and efficient debugging by showing exactly what was happening on one bus relative to another at any given instant of time. Coupled with the P67SA00 Series probing solutions, engineers have flexible options for platform accessibility.

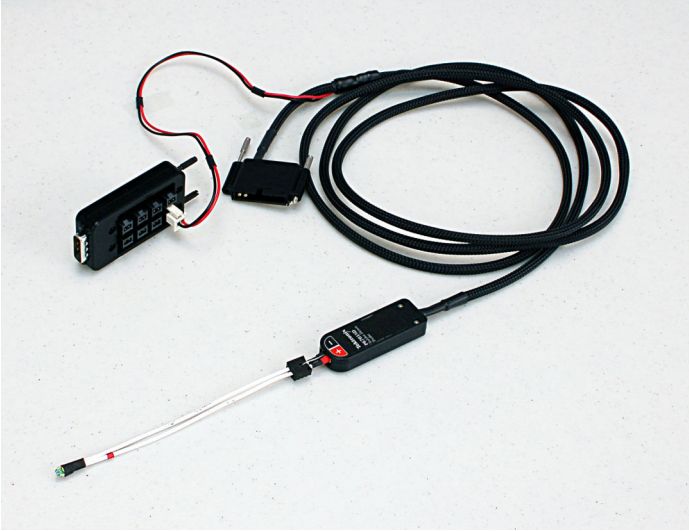


P67SA01SD – Single Differential Input PCI Express Solder-down Probe, shown with Option 1P power adapter.

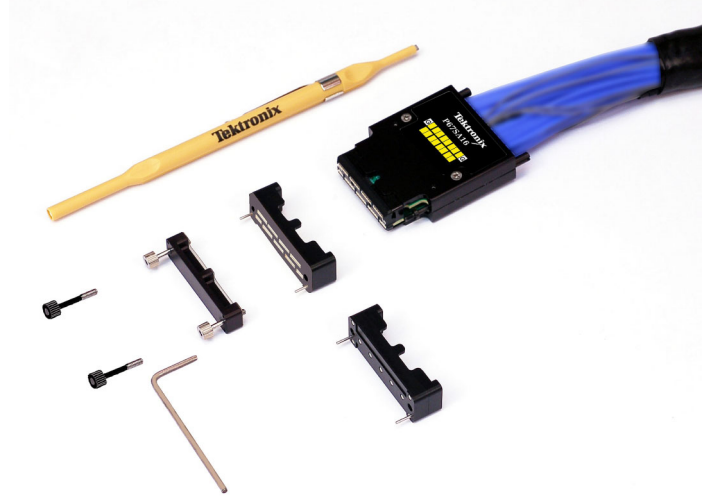

P67SA16 – x8 PCI Express Midbus Probe and Accessories. (x4 midbus probe also available)



P67SA16S – x16 PCI Express Slot Interposer Probe. (x8, x4, x1 slot interposer probes also available)

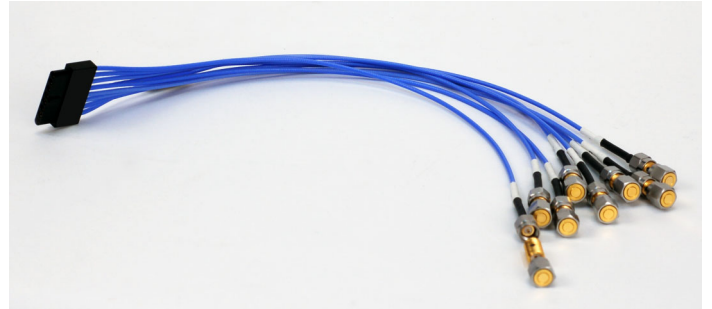


P67UHDSMA – x2 PCI Express Probe Lead Set for P67SA00 probe connections to oscilloscopes.

P67SA00 Series Probes for PCI Express

The P67SA00 Series probes provide validation engineers with a comprehensive set of PCI Express probing solutions, including midbus, slot interposer, and solder-down connectors. With support for PCI Express Gen3 channel lengths up to 24 in. with 2 connectors, these probes utilize

OpenEYE technology offering minimal electrical loading with the highest signal fidelity and active equalization to ensure accurate data recovery of closed eyes. All P67SA00 Series probes feature a graphical lane-swizzling capability for maximum flexibility to accommodate unique circuit board layouts.


With ScopePHY, quickly connect any of the probe connector outputs to an oscilloscope using the P67UHDSMA probe lead set to gain further insight into the PHY layer. Tektronix-supplied S-parameters of the probe and module configure a Tektronix oscilloscope's DSP filters to show the PCI Express link data eye at the probe tip.

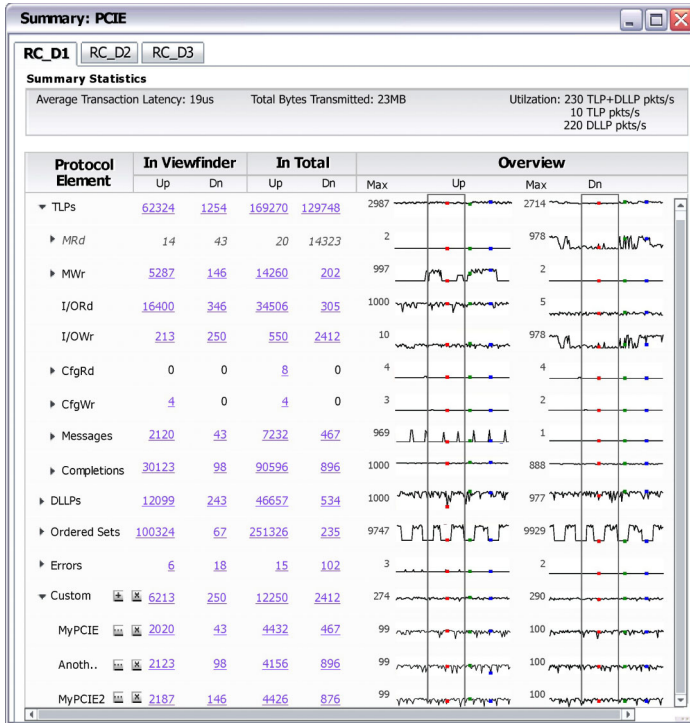

Summary Profile Window.

Information Density – Data Analysis from Transaction to Physical Layer

The new PCI Express software helps view information in a hierarchical and rich format. Protocol information can be expanded and collapsed to rapidly display or hide information as needed. The Summary Profile window provides a statistical summary of all protocol elements contained in the acquisition (TLPs, DLLPs, ordered sets, errors, and custom defined

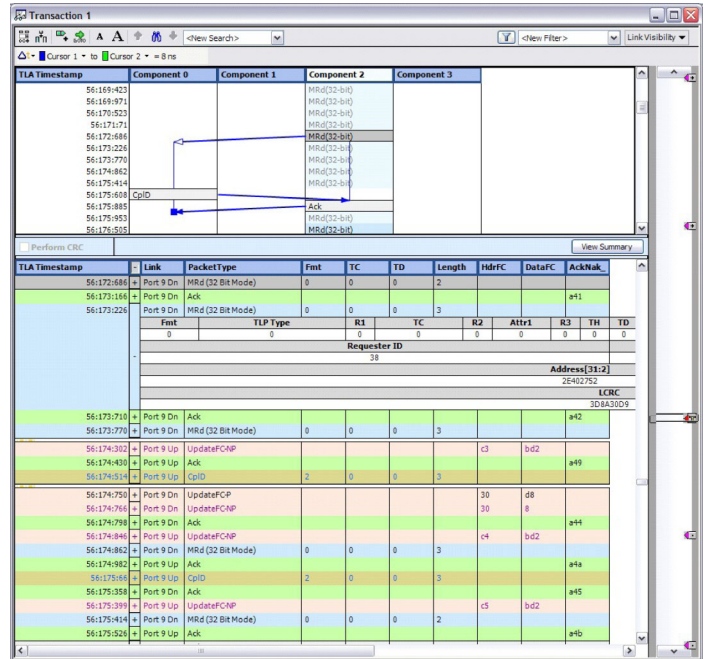

Transaction Window.

packets). Summary statistics include useful information such as average transaction latency, total bytes transmitted and bus utilization.

A single innovative Transaction window helps view protocol behavior at the packet and transaction level interspersed with physical layer activity. Transaction stitching feature shows packets participating in a completed transaction or incomplete transactions as errors in a diagrammatic representation. Additional capabilities, including cursor locking across multiple data windows, Birds-Eye-View to determine the relative position of the data being viewed in the entire acquisition, flow-control credit tracking, and color coding of packets provide enhanced system-level debug.

Characteristics

TLA7SA00 Series

General

Characteristic	Description
Acquisition Rate with Frequency Margin	8 GT/s (+5% to -10%) 5 GT/s ($\pm 10\%$) 2.5 GT/s ($\pm 10\%$)
Number of Lanes	
TLA7SA08	8 differential inputs, x4
TLA7SA16	16 differential inputs, x8
Record Length	TLA7SA16: 160M Symbols per differential input, 8 GB physical memory total (16 GB physical memory for a x16 configuration) TLA7SA08: 160M Symbols per differential input, 4 GB physical memory total 160M Symbols translates into 160 ms at 8 GT/s, 320 ms at 5 GT/s, or 640 ms at 2.5 GT/s at 100% bus utilization
Time Stamp Range	292 hours
Time Stamp	50 bits at 936 ps resolution
Clocking/Acquisition Modes	TLA module without SSC (Spread Spectrum Cloning), External Reference Clock (100 MHz $\pm 10\%$) with or without SSC
External reference clock frequency tolerance	± 300 ppm
Number of Mainframe Instrument Slots Required per TLA Series Module	2

Module Configuration Requirements

Module	Bi-directional Link Width			
	x1	x4	x8	x16
TLA7SA08	1	1	0	0
TLA7SA16	1	1	1	2

Input Characteristics (with P67SA00 Series Probes)

Characteristic	Description
Capacitive Loading	See P67SA00 Series Probe Manual
Minimum Data Eye	See P67SA00 Series Probe Manual

Acquisition Characteristics (with P67SA00 Series Probes)

Characteristic	Description
Dynamic Link-width Switch Latency	Consumes up to 48 symbols (typical)
FTS Support	PCIe Gen1/2: Consumes up to <12 FTS packets (typical) PCIe Gen3: Consumes <4 FTS packets (typical) regardless of Electrical Idle duration

Filter Characteristics

Characteristic	Description
Ordered Sets	TS1, TS2, SKP, EIOS, FTS, EIEOS, SDS
DLLPs	Ack, Nak, PM, Vendor Specific, FC1, FC2, UpdateFC
TLPs	MRd, MRdL, MWr, IORd, IOWr, CfgRd0, CfgWr0, CfgRd1, CfgWr1, Msg, MsgD, Cpl, CplD, CPILk, CPIDLk, FetchAdd, Swap, CAS, LPrfx, EPrfx

Trigger Characteristics

Characteristic	Description
Independent Trigger States	8
Maximum Independent If/Then Clauses per State	8
Maximum Number of Events per If/Then Clause	8
Maximum Number of Actions per If/Then Clause	8
Maximum Number of Event Counters per State	2
Event Counter Range	31 bit
Number of TLP Packet Recognizers per Link Direction	4
Number of DLLP Packet Recognizers per Link Direction	4
Number of Sequence Recognizers	4
Number of Symbols per Sequence Recognizer	16
Number of Link Event Recognizers	4
Number of Global Counters/Timers	4
Trigger Event Types	Anything, TLP, DLLP, Sequence, Link Event, Counter, Timer
Trigger Action Types	Trigger, Trigger All Modules, Wait for System Trigger, Goto, Increment Counter, Decrement Counter, Reset Counter, Start Timer, Reset Timer, Reset and Start Timer, Stop Timer, Reset and Stop Timer, Set Signal Out, Clear Signal Out, Arm Module, Start Storage, Stop Storage, Do Nothing
Counter/Timer Range	48 bit (~5 days with 3.6 ns resolution)
Storage Control (Data qualification)	By state (start/stop)

Physical Characteristics

Dimensions	TLA7SA16		TLA7SA08	
	mm	in.	mm	in.
Height	262	10.3	262	10.3
Width	61	2.4	61	2.4
Depth	381	15	381	15
Weight	kg	lb.	kg	lb.
Net	3.20	7.06	2.84	6.25
Shipping	7.30	16.1	6.94	15.3

P67SA00 Series Probes

General

Characteristic	P67SA08	P67SA16	P67SA16G2	P67SA01S	P67SA04S	P67SA08S	P67SA16S	P67SA01SD	P67UHDSMA
Probe Type	PCI Express Midbus Differential Data	PCI Express Midbus Differential Data	PCI Express Midbus Differential Data	PCI Express Slot Interposer	PCI Express Slot Interposer	PCI Express Slot Interposer	PCI Express Slot Interposer	PCI Express Differential Solder-down Probe	Probe lead set for PCI Express P67SA00 Series probe connections to high-bandwidth oscilloscopes
Number of Differential Pairs	8	16	16	2	8	16	32	1	4
Lane Width	x4	x8	x8	x1	x4	x8	x16	1/2 lane	x2
Recommended Use	Recommended where signal integrity is critical	Recommended where signal integrity is critical	Recommended for midbus probing of PCIe Gen2	Recommended for platforms with no midbus footprints and the PCI Express slot is the only probe access point	Recommended for platforms with no midbus footprints and the PCI Express slot is the only probe access point	Recommended for platforms with no midbus footprints and the PCI Express slot is the only probe access point	Recommended for platforms with no midbus footprints and the PCI Express slot is the only probe access point	Recommended for platforms with no midbus footprint, PCI Express slot; or where space is limited	Recommended for use with any of the P67SA00 Series probe connections to high-bandwidth oscilloscopes
Attachment to Target System	Compression Technology	Compression Technology	—	PCI Express Slot	PCI Express Slot	PCI Express Slot	PCI Express Slot	Solder Down	—
Probe Loading AC/DC	See PCIe3 LPA Instruction Manual								—
Cable Length	1.8 m (6 ft.)								0.3 m (1 ft.)

Midbus Probe Recommended Configuration

x1	x4	x8	x16
1 P67SA08 1 TLA7SA08	1 P67SA08 1 TLA7SA08	1 P67SA16 1 TLA7SA16	2 P67SA16 2 TLA7SA16

Solder-down Probe Recommended Configurations

x1	x4	x8	x16
2 P67SA01SD 1 TLA7SA08	8 P67SA01SD 1 TLA7SA08	16 P67SA01SD 1 TLA7SA16	32 P67SA01SD 2 TLA7SA16

Slot Interposer Probe Recommended Configurations

x1	x4	x8	x16
1 P67SA01S 1 TLA7SA08	1 P67SA04S 1 TLA7SA08	1 P67SA08S 1 TLA7SA16	1 P67SA16S 2 TLA7SA16

Ordering Information

TLA7SA00 PCI Express Logic Protocol Analyzer Modules

Includes: Statement of Compliance, one-year warranty (return to Tektronix), reference clock cable (672-6285-xx), and reference clock jumper cable (174-5392-xx).

Probes, mainframes, and software must be ordered separately.

Module	Description
TLA7SA16	16 Differential Inputs, x8 Logic Protocol Analyzer module, 8 GT/s acquisition, 8 GB physical memory
TLA7SA08	8 Differential Inputs, x4 Logic Protocol Analyzer module, 8 GT/s acquisition, 8 GB physical memory

Note: Requires a TLA7012 or TLA7016 mainframe with TLA software v5.7 or above.

TLA7SA00 PCI Express Software

Software	Description
TMS160PCIE3	TLA protocol software for PCIe 3.0

Logic Analyzer TLA7SA00 Module Options

Option	Description
Opt. 88	Factory Install
Opt. L0	English Manual
Opt. L5	Japanese Manual
Opt. L10	Russian Manual
Opt. L99	No Manual

Service Options

The following service options are offered for the TLA logic analyzer products.

Option	TLA7SA00 Modules
Opt. CA1 provides a single calibration event or coverage for the designated calibration interval, whichever comes first	X
Opt. C3 Calibration Service, 3 Years	X
Opt. C5 Calibration Service, 5 Years	X
Opt. D1 Calibration Data Report	
Opt. D3 Calibration Data Report, 3 Years (with Opt. C3)	
Opt. D5 Calibration Data Report, 5 Years (with Opt. C5)	
Opt. R3 Repair Service, 3 Years	X
Opt. R5 Repair Service, 5 Years	X
Opt. S1 On-site Service, 1 Year	
Opt. S3 On-site Service, 3 Years (with R or C options)	
Opt. R1PW Repair Service Coverage, 1-year Post Warranty	X
Opt. R2PW Repair Service Coverage, 2-year Post Warranty	X
Opt. R3DW Repair Service Coverage, 3 Years (includes product warranty period). 3-year period starts at time of instrument purchase	X
Opt. R5DW Repair Service Coverage, 5 Years (includes product warranty period). 5-year period starts at time of instrument purchase	X

Recommended Accessories

Accessory	Description
P67SA08	8 Differential Pairs PCI Express Midbus Probe and Accessories Includes: Statement of Compliance, (2) 8-channel Retention Mechanisms, Velcro Cable Managers, Probe Instruction Manual
P67SA16	16 Differential Pairs PCI Express Midbus Probe and Accessories Includes: Statement of Compliance, (2) 16-channel Retention Mechanisms, Velcro Cable Managers, Probe Instruction Manual
P67SA01S	x1 PCI Express Slot Interposer Includes: Statement of Compliance, Velcro Cable Managers, Probe Instruction Manual
P67SA04S	x4 PCI Express Slot Interposer Includes: Statement of Compliance, Velcro Cable Managers, Probe Instruction Manual
P67SA08S	x8 PCI Express Slot Interposer Includes: Statement of Compliance, Velcro Cable Managers, Probe Instruction Manual
P67SA16S	x16 PCI Express Slot Interposer Includes: Statement of Compliance, Velcro Cable Managers, Probe Instruction Manual
P67SA01SD	Single Differential Input PCI Express Solder-down Probe Includes: Statement of Compliance, Velcro Cable Managers, Probe Instruction Manual Option 1P: Probe Power Adapter (1 required for every eight (8) P67SA01SD probes)
P67UHDSMA	x2 PCI Express Probe Lead Set for P67SA00 probe connections to oscilloscopes



Product(s) are manufactured in ISO registered facilities.

Contact Tektronix:

- ASEAN / Australasia (65) 6356 3900
- Austria 00800 2255 4835*
- Balkans, Israel, South Africa and other ISE Countries +41 52 675 3777
- Belgium 00800 2255 4835*
- Brazil +55 (11) 3759 7600
- Canada 1 800 833 9200
- Central East Europe, Ukraine, and the Baltics +41 52 675 3777
- Central Europe & Greece +41 52 675 3777
- Denmark +45 80 88 1401
- Finland +41 52 675 3777
- France 00800 2255 4835*
- Germany 00800 2255 4835*
- Hong Kong 400 820 5835
- India 000 800 650 1835
- Italy 00800 2255 4835*
- Japan 81 (3) 6714 3010
- Luxembourg +41 52 675 3777
- Mexico, Central/South America & Caribbean (52) 56 04 50 90
- Middle East, Asia, and North Africa +41 52 675 3777
- The Netherlands 00800 2255 4835*
- Norway 800 16098
- People's Republic of China 400 820 5835
- Poland +41 52 675 3777
- Portugal 80 08 12370
- Republic of Korea 001 800 8255 2835
- Russia & CIS +7 (495) 7484900
- South Africa +41 52 675 3777
- Spain 00800 2255 4835*
- Sweden 00800 2255 4835*
- Switzerland 00800 2255 4835*
- Taiwan 886 (2) 2722 9622
- United Kingdom & Ireland 00800 2255 4835*
- USA 1 800 833 9200

* European toll-free number. If not accessible, call: +41 52 675 3777

Updated 25 May 2010

For Further Information. Tektronix maintains a comprehensive, constantly expanding collection of application notes, technical briefs and other resources to help engineers working on the cutting edge of technology. Please visit www.tektronix.com



Copyright © Tektronix, Inc. All rights reserved. Tektronix products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specification and price change privileges reserved. TEKTRONIX and TEK are registered trademarks of Tektronix, Inc. All other trade names referenced are the service marks, trademarks, or registered trademarks of their respective companies.

02 Sep 2010

52W-25691-0

www.tektronix.com



NUBICOM
(주)누비콤

서울 본사 서울특별시 영등포구 경인로 775(문래동 3가, 에이스하이테크시티 3동 201호)
TEL: 070-7872-0701 FAX: 02-2167-3801 E-mail: sales@nubicom.co.kr

대전 사무소 대전광역시 유성구 대덕대로 593(도룡동 386-2) 대덕테크비즈센터 203호
TEL: 070-7872-0712 FAX: 042-863-2023 E-mail: inyeom@nubicom.co.kr

(주)누비콤은 텍트로닉스의 공식 전국 담당 대리점입니다