# 2100

# 6<sup>1</sup>/<sub>2</sub>-Digit USB Digital Multimeter

0

The Model 2100 USB Digital Multimeter is the newest member of Keithley's family of high performance DMMs. Its high accuracy (38ppm), 6<sup>1</sup>/<sub>2</sub>-digit resolution is ideal for critical measurements. The Model 2100 features 11 measurement

functions and 8 math functions to easily accom-

modate the most commonly measured parameters. All accessories, such as USB cable, probes, and software, are included with the Model 2100. With its unique combination of high precision and low total cost of ownership, the Model 2100

is an unbeatable value for R&D engineers, test

engineers, scientists, and students making basic

The Model 2100 provides stability, accuracy, and speed at a very low cost. It has 0.0038% 1-year

precision measurements on the bench and in

system applications.

**High Precision, Low Cost** 



High precision 6½-digit DMM for critical measurements at a 5½-digit price

2100 6 1/2 Dialt Mu

SMOLE TANK

STORE

000.0000 VDC

- 11 measurement functions cover most commonly measured parameters
- Fully specified accuracies on all functions for ISO-compliant results
- Included PC software utilities for graphing and data sharing in both Microsoft<sup>®</sup> Word and Excel
- Rugged construction for durability in bench/portable applications
- Selectable front/rear inputs facilitate bench or rack use
- Includes all accessories, such as startup software, USB cable, power cable, and safety test lead, for lowest total cost
- CE compliant and UL listed
- TMC compliant USB 2.0 interface for use with SCPI test programs

fast 4½ digit setting, it reads over 2000 rdgs/s into its 2000 reading internal buffer.
The Model 2100 provides a wide number of measurement ranges and functions:
DC voltage: 0.1V, 1V, 10V, 100V, and 1000V

basic DC voltage accuracy on the 10V range and 0.013% 1-year basic resistance accuracy on the  $10k\Omega$ 

range. At 6<sup>1</sup>/<sub>2</sub> digits, the Model 2100 delivers 50 triggered rdgs/s via the USB remote interface. At the

AC voltage: 0.1V, 1V, 10V, 100V, and 750V

AUTO

- DC current: 10mA, 100mA, 1A, and 3A
- AC current: 1A and 3A
- Two- and four-wire resistance:  $100\Omega$ ,  $1k\Omega$ ,  $10k\Omega$ ,  $100k\Omega$ ,  $1M\Omega$ ,  $10M\Omega$ , and  $100M\Omega$
- Frequency: From 3Hz to 300kHz
- · Period measurement
- Diode measurement
- Programmable A-D converter and filter settings for signal to noise optimization

Additionally, eight mathematical operations can be performed on measurement readings: RATIO, %, Min/Max, NULL, Limits, mX+b, dB, and dBm testing. Microsoft Office, Word, and Excel add-in tools allow remote storage and recall of the measured values from these applications. A graphing utility enables charting of measurements versus time for trending and noise observations.

The TMC compliant USB remote interface enables control from a PC for consistent test/calibration procedure execution and easy re-use of existing SCPI programs, including Agilent Model 34401A command emulation.

## Simple to Use

The Model 2100 can be setup quickly and is very easy to use. It has a high contrast front panel and keypad that are intuitive and user-friendly. An easy to read  $5\times7$  dot matrix, vacuum fluorescent display (VFD) offers three-color annunciators so users can easily distinguish each function symbol by its color.

## **Strength and Versatility**

With its rugged construction and rubber bumpers, the Model 2100 has the durability to withstand bench, portable, or stacking applications. A sturdy carrying handle facilitates transportability.



**KEITHLEY** A Tektronix Company

# 2100

# **Ordering Information**

2100/100	6½-digit USB Digital Multimeter (100V)
2100/120	6½-digit USB Digital Multimeter (120V)
2100/220	6½-digit USB Digital Multimeter (220V)
2100/230	-240
	6½-digit USB Digital Multimeter (230-240V

### **Accessories Supplied**

Instruction manual on CD, Specifications, LabVIEW\* Driver, Keithley I/O Layer, USB Cable, Power Cable, Safety Test Leads, KI-Tool, and KI-Link Add-in (Both Microsoft Word and Excel versions)

### **ACCESSORIES AVAILABLE**

#### RACK MOUNT KITS

4299-3	Single Rack Mount Kit
4299-4	Dual Rack Mount Kit
8605	High Performance Modular Test Leads
8606	High Performance Modular Probe Kit

### SERVICES AVAILABLE


2100/120-3Y-EW	1 Year Factory Warranty extended to 3 years from date of shipment
C/2100/120-3Y-D	ATA
	3 (Z540-1 compliant) Calibrations within 3
	years of purchase for Model 2100/120*
C/2100/120-3Y-IS	0
	3 (ISO-17025 accredited) Calibrations within 3 years of purchase for Model 2100/120*
*Not available in	all countries

# 6<sup>1</sup>/<sub>2</sub>-Digit USB Digital Multimeter

## Applications

The Model 2100 USB Digital Multimeter is ideal for applications in: electronic device, circuit, module, and product testing; low cost production testing of electrical and electronic components, sub-assemblies, and end products; and student lab assignments. Typical applications include:

- Test Engineers: Manual and semi-automatic electrical functional test
- Development Engineers: Electrical/electronic circuit and product validation
- Service/Calibration Technicians: Electronic product repair and calibration
- · Research Scientists: Electrical and physics experiments testing
- · Engineering Students: Electronic device and circuits experiment testing

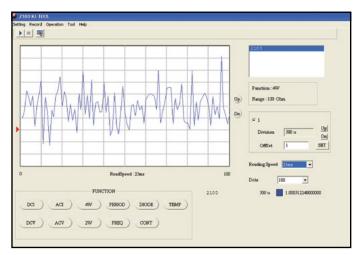

## Startup Software, PC Utilities Included

The KI-Tool application provides charting and graphing capabilities without programming to simplify setup, checkout, and basic measurement applications requiring graphical data representation. Scale, offset, and level can be adjusted to fine tune images for visual evaluation of signal and noise elements over time. It also includes tabular data and SCPI command prompt windows for maximum flexibility. Data sets can also be saved to disk files.

The Microsoft Excel Add-In utility is also included and provides quick data import into a standard Microsoft Excel spreadsheet, including selectable graphing, instrument settings, and number of data points collected. Data can then be analyzed through standard or optional Microsoft Excel functions, including graphical, statistical, and trend charting. A version supporting Microsoft Word is also included for direct data import into reports.

A Tektronix Company



# 6<sup>1</sup>/<sub>2</sub>-Digit USB Digital Multimeter

# Specifications

### DC CHARACTERISTICS: Accuracy<sup>1</sup> $\pm$ (% of reading + % of range)

Function	Dango	Perclution	Innut Posistanco	1 Voor 27°C +5°C
runction	Range	Resolution	Input Resistance	1 Year, 23°C ±5°C
	100.0000 mV	0.1 µV	>10 GΩ	0.0055 + 0.0040
	1.000000 V	$1.0 \ \mu V$	>10 GΩ	0.0045 + 0.0008
DC Voltage	10.00000 V	$10 \mu V$	>10 GΩ	0.0038 + 0.0006
	100.0000 V	$100 \mu V$	$10 \text{ M}\Omega$	$0.0050 \pm 0.0007$
	1000.000 V	1 mV	$10 \text{ M}\Omega$	0.0055 + 0.0010
Function	Range	Resolution	Shunt Resistance	1 Year, 23°C ±5°C
	10.00000 mA	10 nA	5.1 Ω	0.055 + 0.025
DCL (DC Course at)	100.0000 mA	100 nA	5.1 Ω	0.055 + 0.006
DCI (DC Current)	1.000000 A	1 µA	$0.1 \Omega$	0.120 + 0.015
	3.00000 A	$10 \ \mu \text{A}$	0.1 Ω	0.150 + 0.025
Function	Range	Resolution	Test Current	1 Year, 23°C ±5°C
	100.0000 Ω	$100 \mu\Omega$	1 mA	0.015 + 0.005
	1.000000 k $\Omega$	$1 \text{m}\Omega$	1 mA	0.015 + 0.002
	10.00000 kΩ	$10 \text{m}\Omega$	100 µA	0.013 + 0.002
Resistance <sup>2</sup>	100.0000 kΩ	$100 \mathrm{m}\Omega$	10 µA	0.015 + 0.002
	$1.000000 \mathrm{M}\Omega$	1 Ω	5 µA	0.017 + 0.002
	$10.00000 \mathrm{M}\Omega$	10 Ω	500 nA	0.045 + 0.002
	$100.0000 \mathrm{M}\Omega$	100 Ω	500 nA  10 MΩ	1.00 + 0.020
Diode Test	1.0000 V	10 µV	1 mA	0.040 + 0.020
Continuity	1000.00 Ω	10mΩ	1 mA	$0.024 \pm 0.030$

#### **DC NOTES**

1. Specifications valid after two hour warm-up.

a. ADC set for continuous trigger operation.
b. Input bias current <30pA at 25°C.</li>
c. Input protection 1000V all ranges (2W input).
d. Measurement rate set to 1 PLC.

2. Specifications for 4% of how mode. For 2W ohms, use zero null or subtract lead resistance from displayed reading. a. Maximum lead resistance 10% of range per lead for 100 $\Omega$  and 1k $\Omega$  ranges; add 1k $\Omega$  per lead for all other ranges.

#### **MEASUREMENT NOISE REJECTION** DC (60Hz/50Hz)

Rate	Digits	CMRR <sup>1</sup>	NMRR <sup>2</sup>
10PLC	6½	140 dB	60 dB
1PLC	51/2	140 dB	60 dB

1. For  $1k\Omega$  unbalance in LO lead.

2. For line frequency  $\pm 0.1\%$ .

### **TEMPERATURE (RTD)**

Range	Resolution	4-Wire Accuracy <sup>1</sup> , 1 Year
-100°C to +100°C	0.001°C	±0.1°C
-200°C to +630°C	0.001°C	±0.2°C
RTD TYPE: 100Q plat	tinum (PT100) D	100 F100 PT385 or

(P1100), D100, PT3916.

MAXIMUM LEAD RESISTANCE (each lead):  $12\Omega$  (to achieve rated accuracy).

SENSOR CURRENT: 1mA (pulsed).

1. Excluding probe errors.  $23^{\circ}C \pm 5^{\circ}C$ .

Model 2100 specifications





# 6<sup>1</sup>/<sub>2</sub>-Digit USB Digital Multimeter

#### AC CHARACTERISTICS: Accuracy<sup>1</sup> $\pm$ (% of reading + % of range)

Function	Rar	Ige	Frequency (Hz)	1 Year (% of reading) 23°C ±5°C
		-	3-5	0.10
Frequency and Period	100 mV t	o 750 V <sup>2</sup>	5-40	0.05
			40-300k	0.01
Function	Range	Resolution	Frequency (Hz)	1 Year (23°C ±5°C)
	100.0000 mV 0.1 μV		3 - 5	1.15 + 0.05
			5 - 10	0.45 + 0.05
		0.1V	10 - 20k	$0.08 \pm 0.05$
		$0.1\mu$ v	20k - 50k	0.15 + 0.06
			50k – 100k	0.70 + 0.09
ACV			100k - 300k	4.25 + 0.60
(AC TRMS Voltage)			3-5	1.10 + 0.04
(onlinge)			5 - 10	0.4 + 0.04
	1.000000 V	1.0 μV to 1 mV	10 - 20k	$0.08 \pm 0.04$
	to 750.000 V <sup>2</sup>		20k - 50k	0.14 + 0.06
	/ )0.000 1		50k – 100k	$0.70 \pm 0.08$
			100k - 300k	4.35 + 0.50
		1 μΑ	3-5	1.10 + 0.05
	1.000000 A		5 - 10	0.40 + 0.05
ACI			10 – 5k	0.15 + 0.05
(AC TRMS Current)			3-5	1.25 + 0.07
current)	3.000000 A	$10 \mu\text{A}$	5 - 10	0.45 + 0.07
			10 – 5k	0.20 + 0.07

#### GENERAL

AC CMRR: 70dB (for $1k\Omega$ unbalance LO lead).
<b>POWER SUPPLY:</b> 120V/220V/240V.
POWER LINE FREQUENCY: 50/60Hz auto detected.
POWER CONSUMPTION: 25VA max.
DIGITAL I/O INTERFACE: USB-compatible Type B connection.
ENVIRONMENT: For indoor use only.
<b>OPERATING TEMPERATURE:</b> 5° to 40°C.
<b>OPERATING HUMIDITY:</b> Maximum relative humidity 80% for temperature up to 31°C, decreasing linearly to 50% relative humidity at 40°C.
STORAGE TEMPERATURE: -25° to 65°C.
OPERATING ALTITUDE: Up to 2000m above sea level.
<b>BENCH DIMENSIONS (with handles and feet):</b> 112mm high × 256mm wide × 375mm deep (4.4 in. × 10.1 in. × 14.75 in.).
WEIGHT: 4.1kg (9 lbs.).
SAFETY: Conforms to European Union Directive 73/23/ECC, EN61010-1, UL61010-1:2004.

EMC: Conforms to European Union Directive 89/336/EEC, EN61326-1. WARRANTY: One year.

#### AC NOTES

(주)누비콤

대전 사무소

1. Specifications valid for two hour warm-up at 61/2 digits.

a. Slow AC filter (3Hz bandwidth).b. Pure sine wave input greater than 5% of range.

2. 750VAC range is limited to 100kHz.

c@Lus €€ 1140523 - 100V - 120V - 220V

Model 2100 rear panel

KEITHLE

A Tektronix Company

1.888.KEITHLEY (U.S. only)

www.keithley.com

서울분산 서울특별시 영등포구 경인로 775(문래동 37), 에이스하이테크시티 3동 201호) TEL: 070-7872-0701 FAX: 02-2167-3801 E-mail: sales@nubicom.co.kr

대전광역시 유성구 대덕대로 593(도롱동 386-2) 대덕테크비즈센터 203호 TEL: 070-7872-0712 FAX: 042-863-2023 E-mail: inyeom@nubicom.co.kr